



Technical Specifications

Composition

Base Acoustic Foam (Polyester)

Finishes Fabric





Application Ceiling Mounted

Accessories Clutch wire system

Dimensions 1200 x 400 x 27 mm (L x H x T)




Patterns & Dimensions

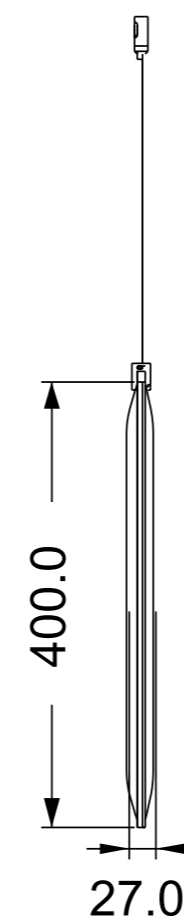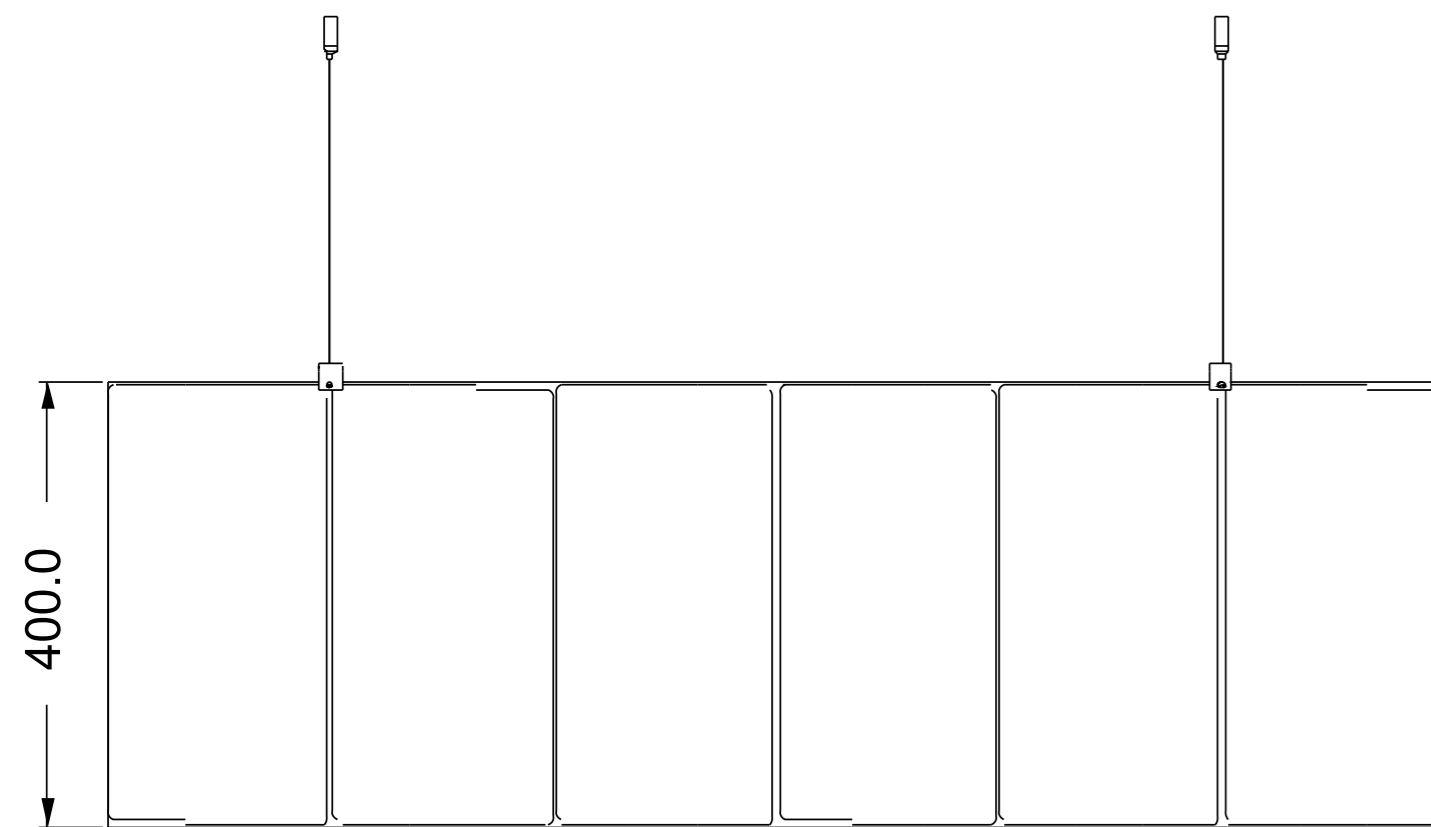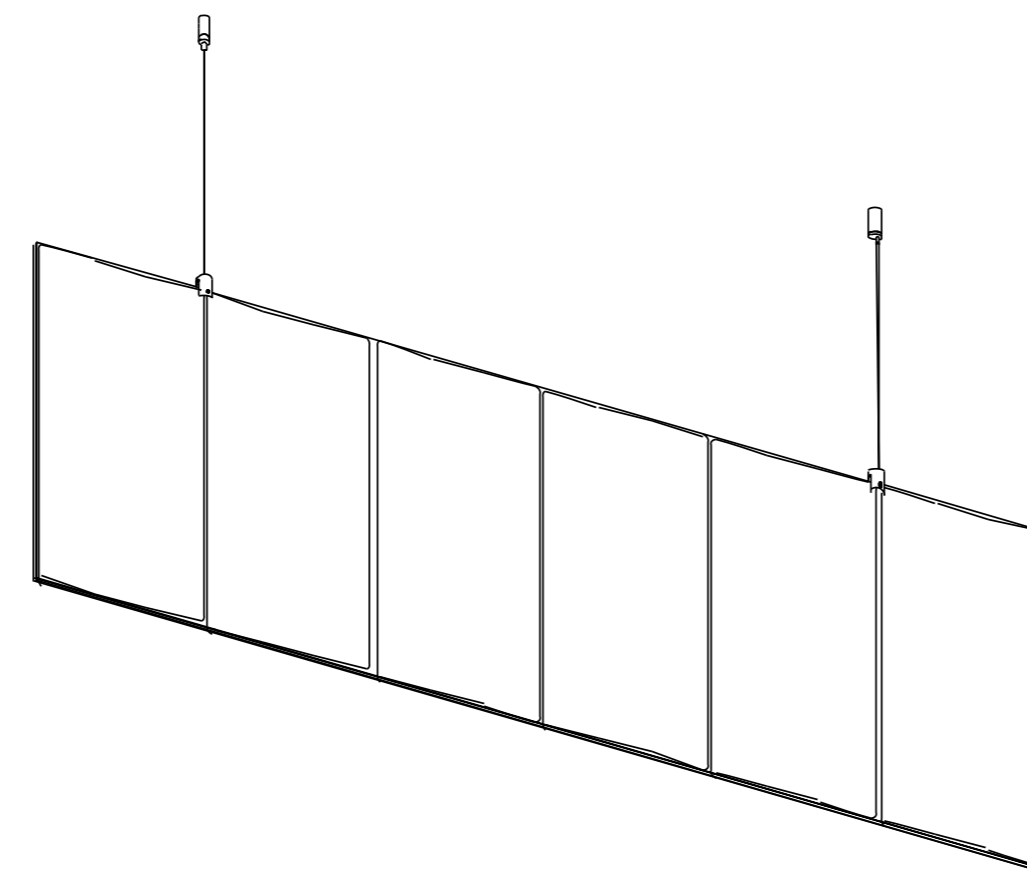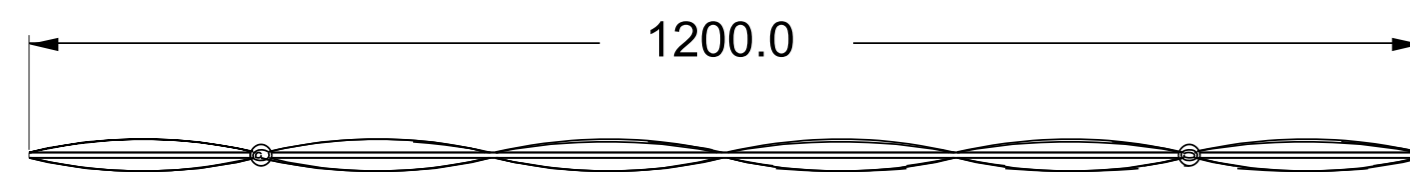

Performance

Acoustic Properties:

ASTM C-423 | NRC: **0.38** Sabine m² (Average value of sound absorption)

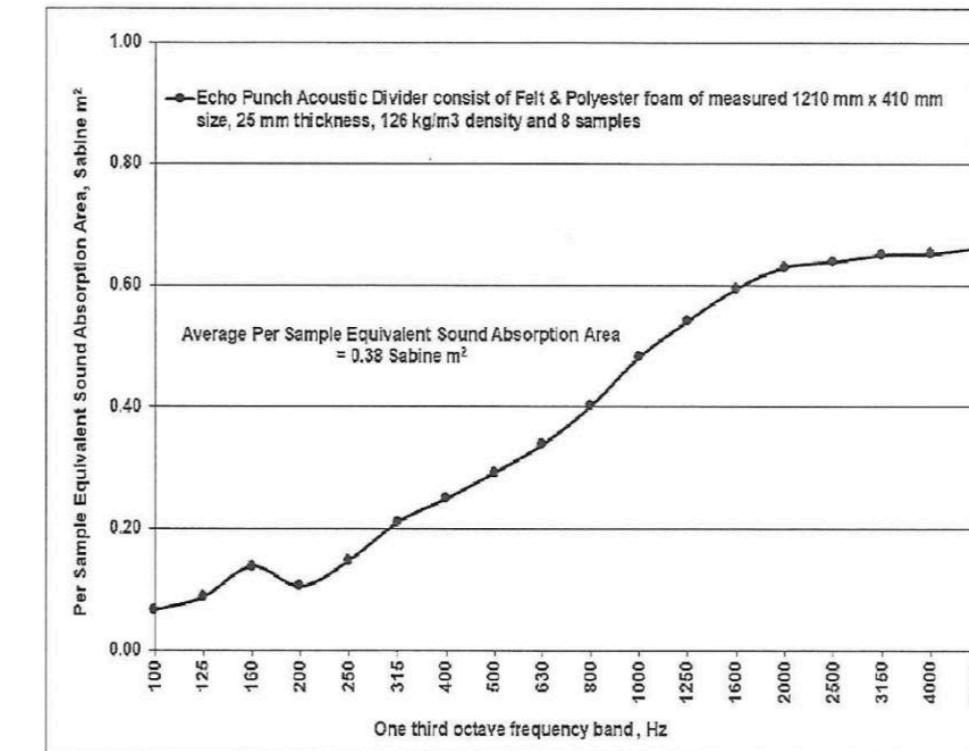

Fire Resistance:

1. Acoustic Foam (Polyester)

- **ASTM E84- 2021** | Flame Spread Index: Class 1 or A | Smoke Developed Index: Class 1 or A
- **BS/EN 13501-1:2018** | Classification: B-s1, d0
- **AS/NZS 1530.3:1999** | Flame Spread Index: 0 | Smoke Index: 2

2. Fabrics

- **Category A+**

BS 5852 Part 1: 1979 Ignition Source 0 & 1 | Details: Cigarette Test & Match Test | Result: PASS on both tests | Test Number: 423681

- **Category A**

BS 5852 Part 1: 1979 Ignition Source 0 & 1 | Details: Cigarette Test & Match Test | Result: PASS on both tests | Test Number: 187662

- **Category B**

AS/NZS 1530.3:1999 | Details: Simultaneous test for Ignitability, Flame Propagation, Heat Release & Smoke Release | Result: Passed | Test Number: 19-001329

- **Category D**

CA TB 117-2013 (Section 1 – Cover Fabric) | Details: Upholstery category fabric meeting multiple international fire resistance standards | Results: PASS

VOC Emissions

CDPH Standard Method v1.2 | Section 01350 – Low-emitting materials for schools and offices

Sustainability

Certifications & Compliance:

- LEED v4: Supports EQ Credit (Low-Emitting Materials)
- Certified Low VOC materials
- EPD & HPD certified
- Declare Label compliant
- USGBC LEED compliant



Declare.



Explore the upcoming colourways in the sections ahead. →

Fabrics

CAT A+ : COLORWAYS


SOHO



Composition	100% Polyester
Weight (per surface)	420 gsm
Width	145 cm (min. usable 138 cm)
Abrasion resistance	100,000+ Wyzenbeek 90,000 Martindale
Flammability	CA TB 117 - 2013 BS 5852: Part 1(1979)
Fastness to light	5
Fastness to rubbing	Wet - 4 Dry - 4/5
Pilling	Piling on Martindale - 3/4 Brush pilling - 5
Seam Slippage	Warp - 2.5 mm Weft - 3 mm


CAT A : COLORWAYS

GLASGOW

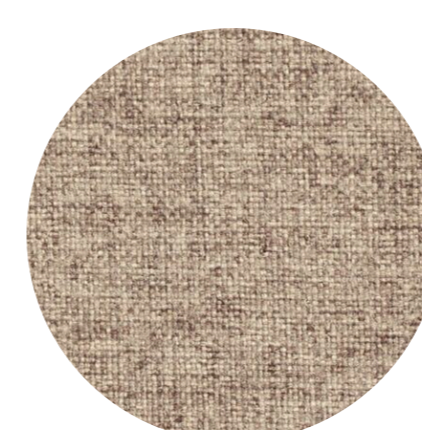


Composition	100% Polyester
Weight (per surface)	265 gsm
Width	145 cm (min. usable 138 cm)
Abrasion resistance	84,000 Wyzenbeek >100,000 Martindale
Flammability	CA TB 117 - 2013 BS 5852 Source 0,1 (cigarette & match) EN 1021 Part1,2 (cigarette & match)
Fastness to light	5
Fastness to rubbing	Wet - 3/4 Dry - 4
Pilling	3/4
Seam Slippage	Warp - 4 mm Weft - 4 mm

QUARTZ

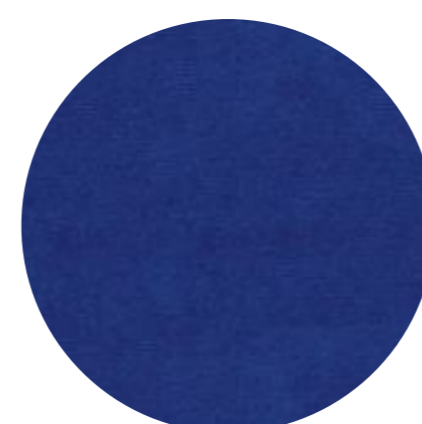

Composition	100% Polyester
Weight (per surface)	360 gsm
Width	142 cm (min. usable 138 cm)
Abrasion resistance	100,000 Wyzenbeek 90,000 Martindale
Flammability	CA TB 117 - 2013
Fastness to light	4/5
Fastness to rubbing	Wet - 4 Dry - 4/5
Pilling	Martindale Pilling - 5 Brush Pilling - 5
Seam Slippage	Warp - 3 mm Weft - 3 mm

SHETLAND

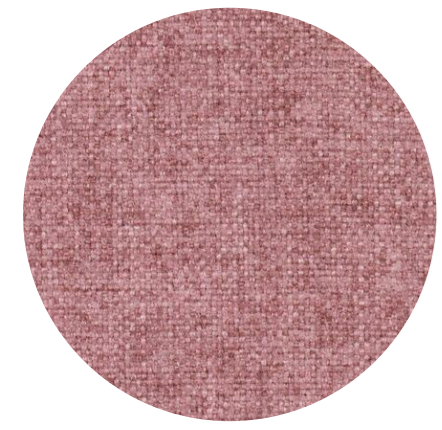

Composition	100% Polyester
Weight (per surface)	280 gsm
Width	145 cm (min. usable 138 cm)
Abrasion resistance	>100,000 Wyzenbeek 45,000 Martindale
Flammability	BS 5852: Part 1 (1979) CA TB 117 - 2013
Fastness to light	5
Fastness to rubbing	Wet - 4 Dry - 4/5
Pilling	Martindale Pilling - 4 Brush Pilling - 5
Seam Slippage	Warp - 1.67 mm Weft - 2 mm


TWEED



Composition	100% Polyester
Weight (per surface)	240 gsm
Width	142 cm (min. usable 138 cm)
Abrasion resistance	54,000 Wyzenbeek 100,000 Martindale
Flammability	CA TB 117 - 2013 BS 5852 Source 0,1 (cigarette & match) EN 1021 Part1,2 (cigarette & match)
Fastness to light	5
Fastness to rubbing	Wet - 4 Dry - 4/5
Pilling	3/4
Seam Slippage	Warp - 2 mm Weft - 2 mm

CAT B : COLORWAYS

ELTON

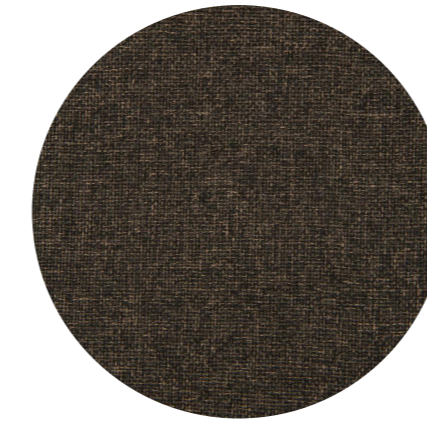

Composition	100% Polyester
Weight (per surface)	275 gsm
Width	140 cm
Abrasion resistance	70,000 Wyzenbeek
Flammability	AS/NZS 1530.3 - 1999
Fastness to light	5
Fastness to rubbing	Wet - 4/5 Dry - 4/5
Pilling	5
Seam Slippage	Warp - 3.3 mm Weft - 3 mm
Attributes	Halo Easy Care, Oekotex Standard 100

FELIX



Composition	100% Polyester
Weight (per surface)	380 gsm
Width	142 cm
Abrasion resistance	100,000 Wyzenbeek
Flammability	AS/NZS 1530.3 - 1999
Fastness to light	6
Fastness to rubbing	Wet - 5 Dry - 5
Pilling	5
Seam Slippage	Warp - 2 mm Weft - 1.5 mm
Attributes	Halo Easy Care, Oekotex Standard 100


CAT D : COLORWAYS

CARRARA




Composition	Vinyl, 100% polyester backing
Weight	695 gsm (± 45)
Width	137 cm (+5 cm)
Abrasion	No significant wear after 300000 cycles
Flammability	IMO MSC 88/26/ADD, 2PART 8 (3,1 and 3,2) EN1021 (Part 1 & 2) BS 5852 Source 0,1 (Cigarette & Match) NF P 92-503(M2) DIN 4102 (B2) SN 198'898 & VKF AS.1530.03 FAR 25-853 R118 Annex 6,7,8 ISO 3795 ≤ 100 mm/min (FMVSS302)

NATURAL LINEN

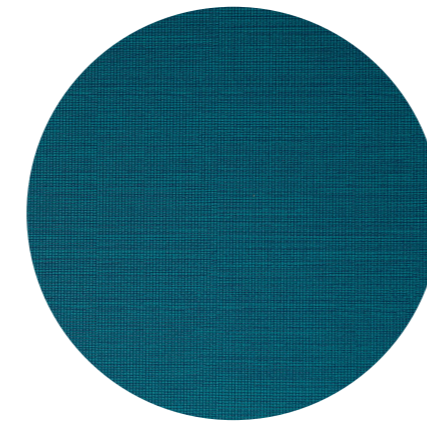

Composition	Vinyl, 100% polyester backing
Weight	695 gsm (± 45)
Width	137 cm (+5 cm)
Abrasion	No significant wear after 300000 cycles
Flammability	EN1021 (Part 1 & 2) IMO MSC 88/26/ADD, 2PART 8 (3,1 and 3,2) NF P 92-503(M2) DIN 4102 (B2) AS.1530.03 FAR 25-853 R118 Annex -6, -7, -8 ISO 3795 ≤ 100 mm/min (FMVSS302)

SUNDANCE

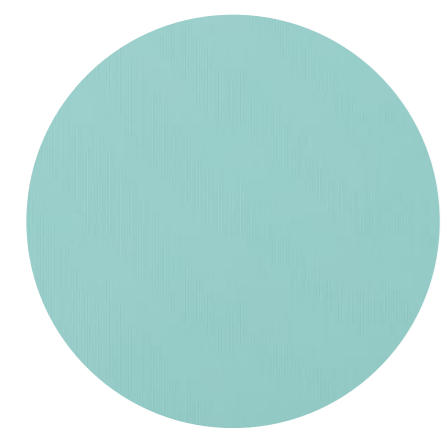

Composition	Vinyl, 100% polyester backing
Weight	695 gsm (± 45)
Width	137 cm (+3 cm)
Abrasion	No significant wear after 300000 cycles
Flammability	EN1021 (Part 1 & 2) NF P 92-503 (M2) DIN 4102-1 (B2) AS.1530.03 FAR 25-853 R118 Annex -6, -7, -8 ISO 3795 ≤ 100 mm/min (FMVSS302)

