

Technical Specifications

Composition

Base 100% PET (60% recycled content)

Finishes

- Fabric** : 100% PES
- Felts** : 100% PET (60% recycled content)
- Colorline** : 100% PET (60% recycled content)

Back Finish Black Textile

Application Wall & Ceilings


Installation Adhesive & Velcro



Patterns & Dimensions


Thickness: 12 mm & 24 mm ($\pm 15\%$)

Variant 1: Fika

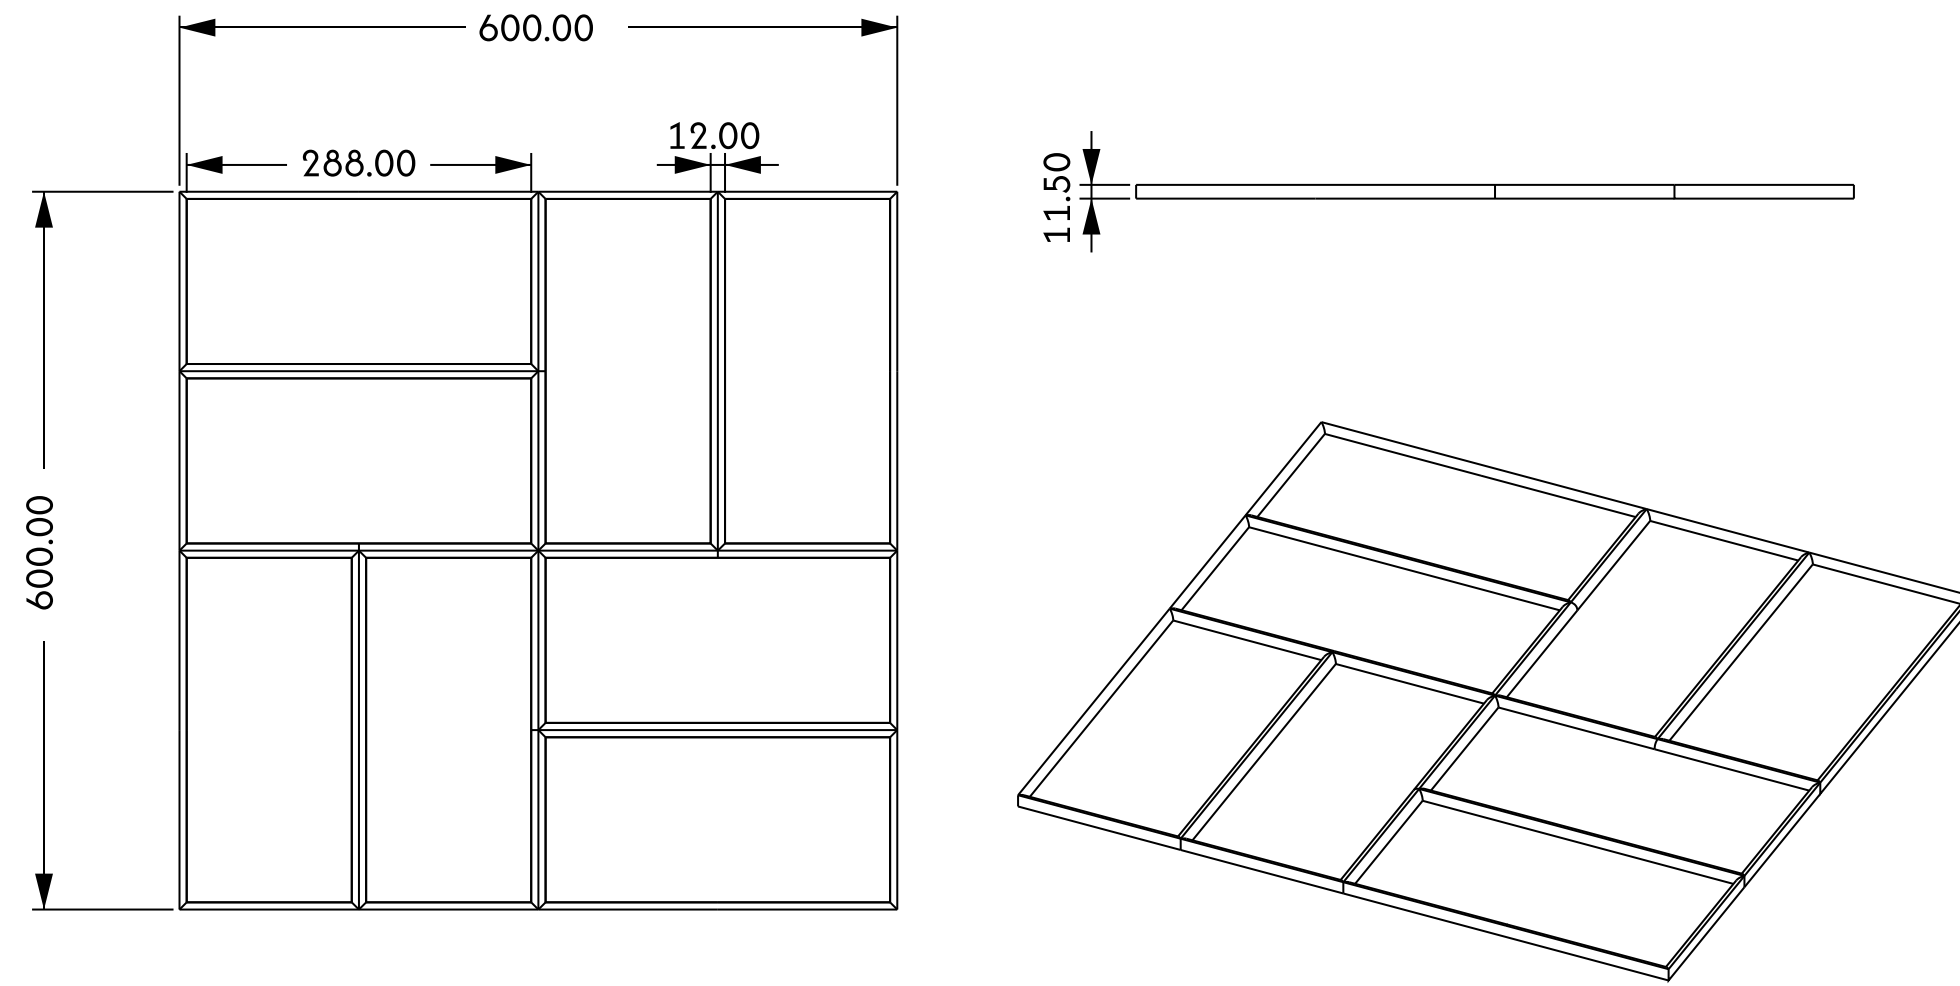




Dimensions 600 x 600 mm (L x W)

Variant 2: Brick

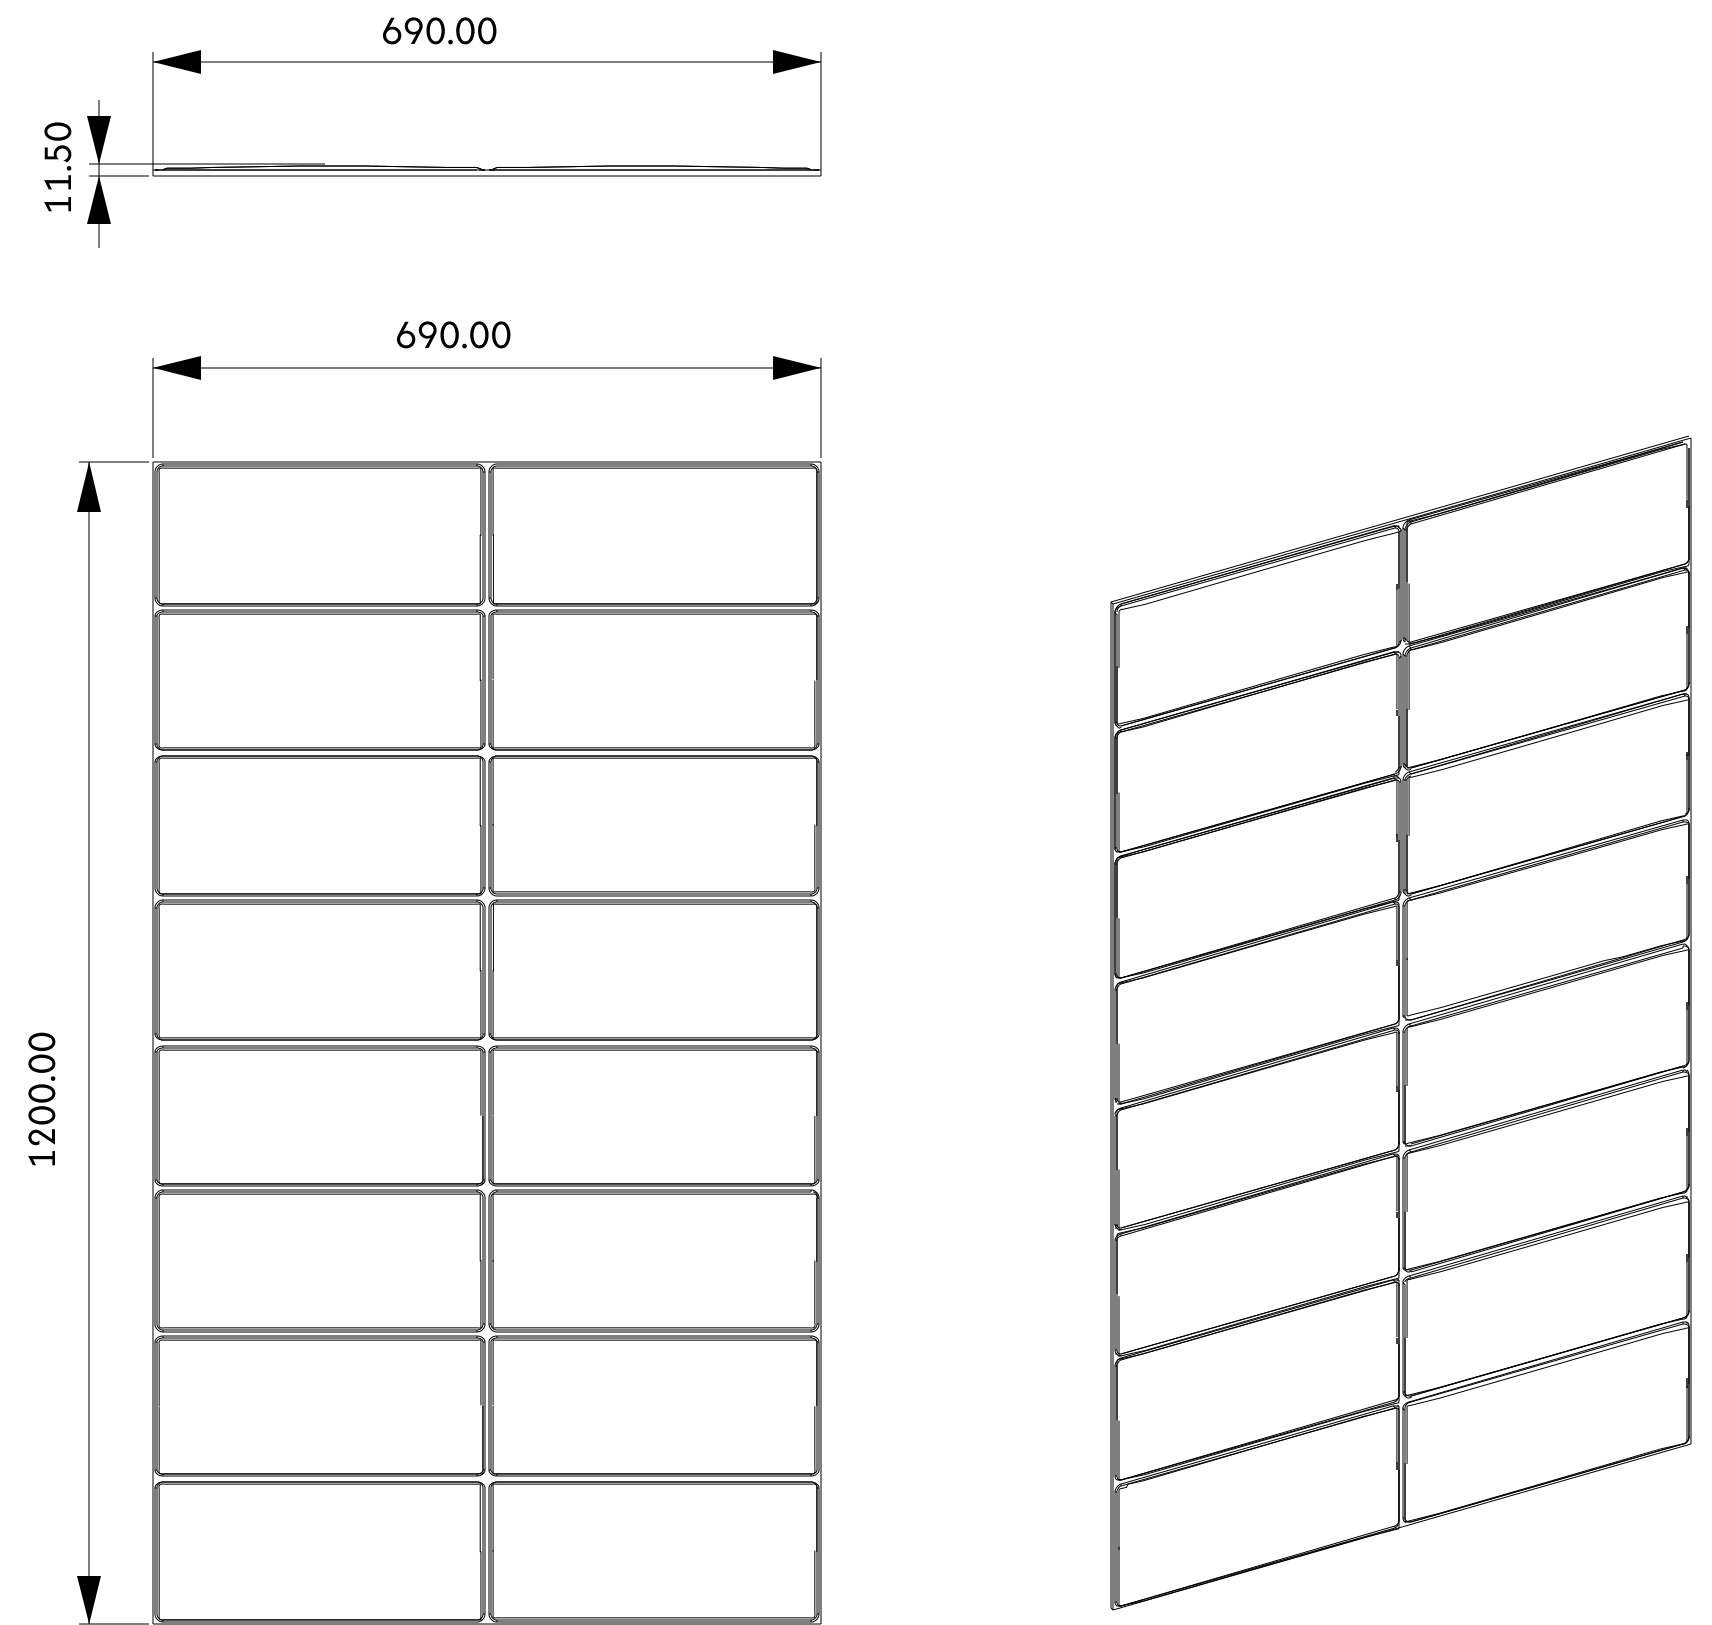





Dimensions 1200 x 690 mm (L x W)

Variant 3: Fusion

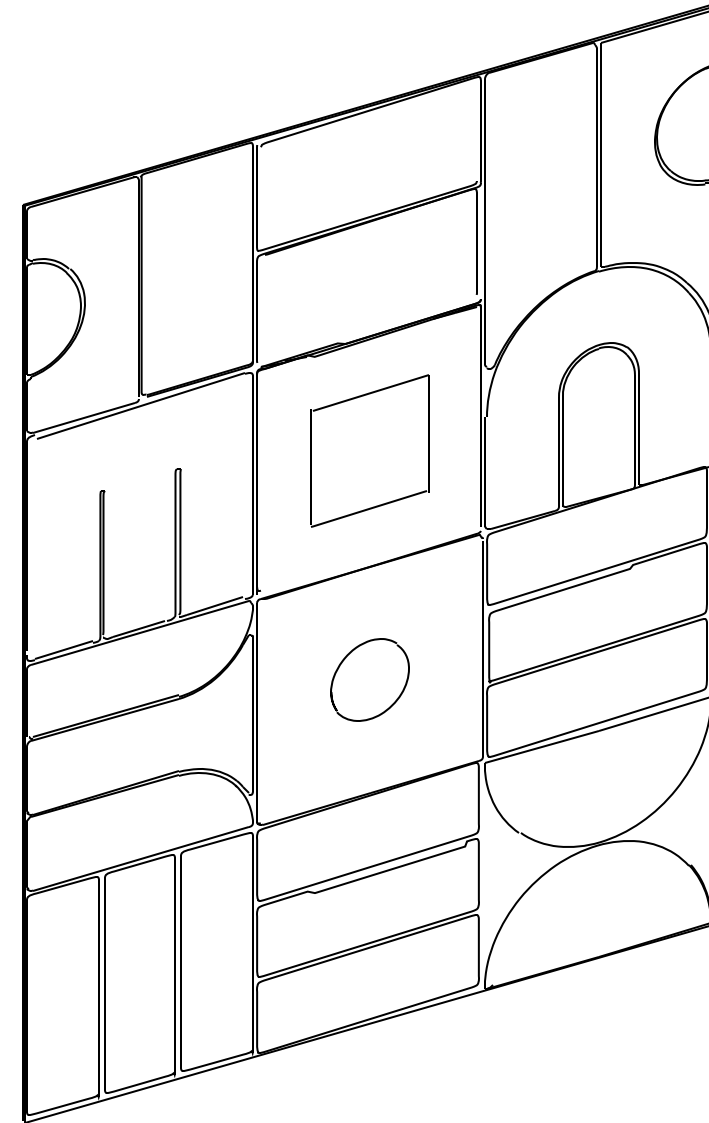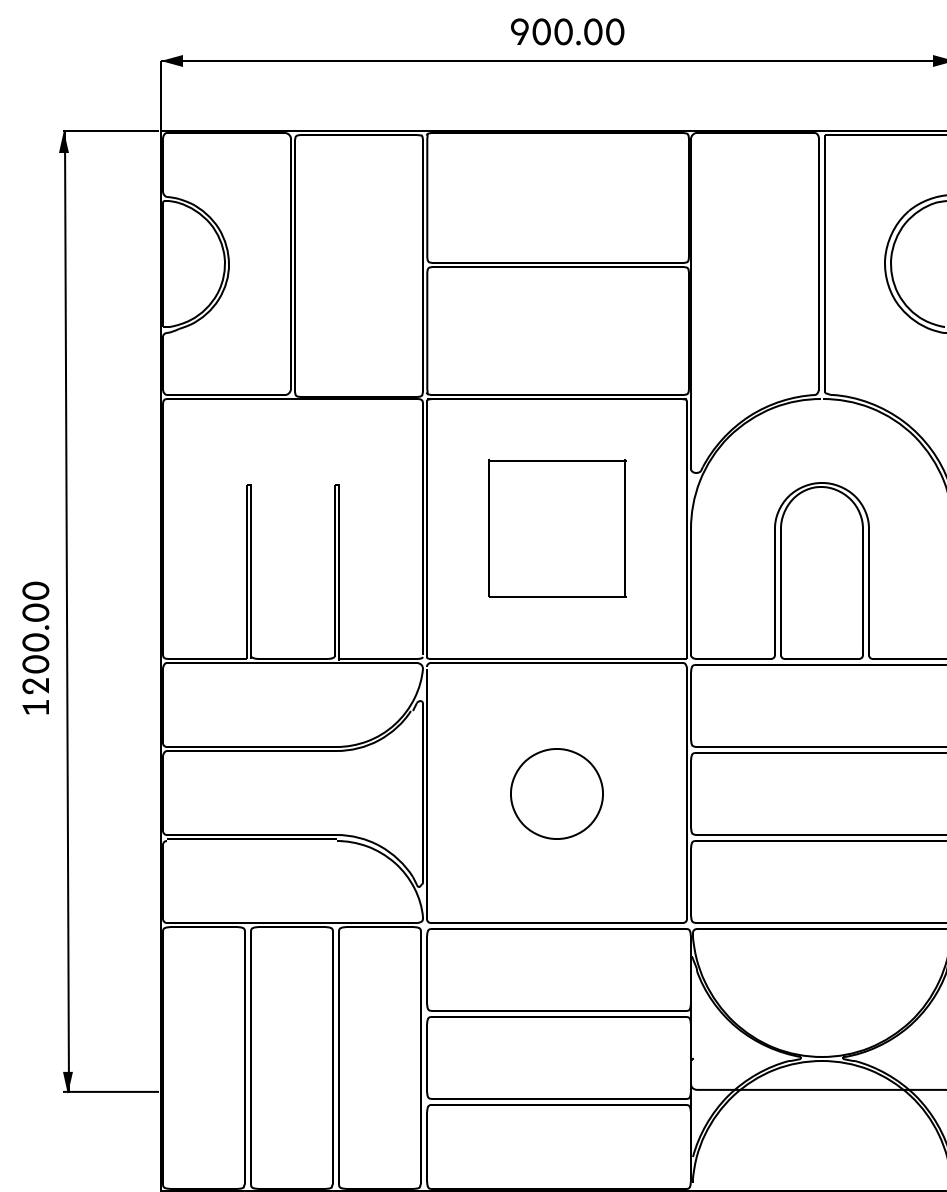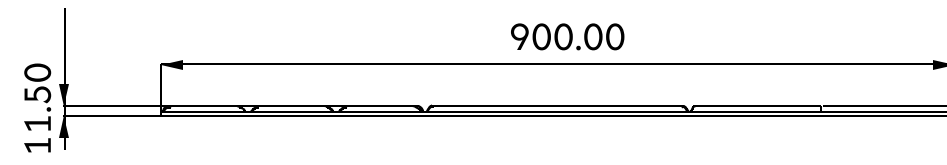




Dimensions 1200 x 900 mm (L x W)

Variant 4: Lagom

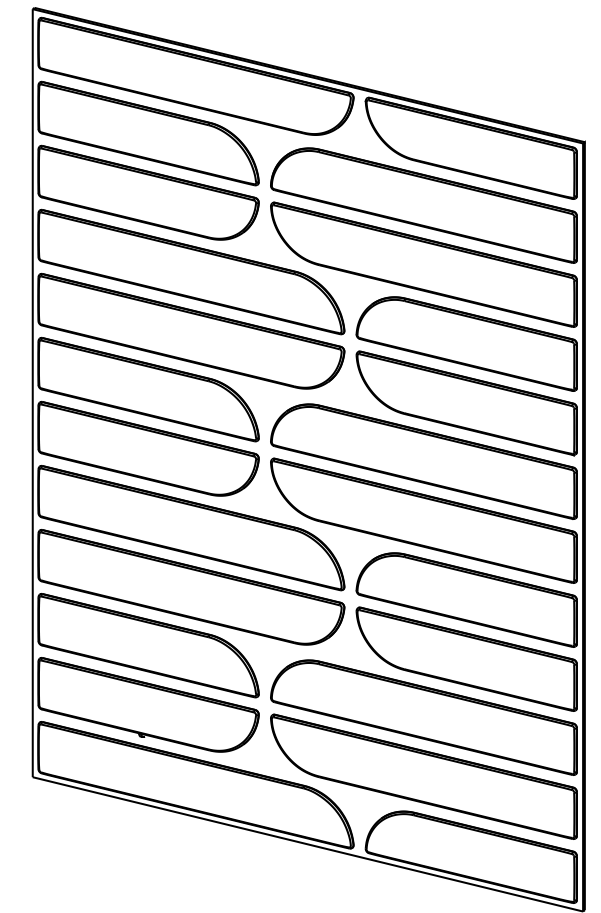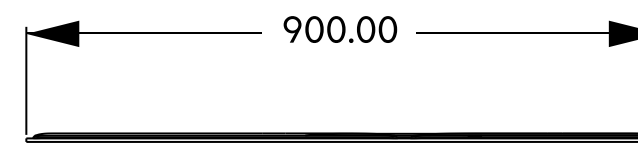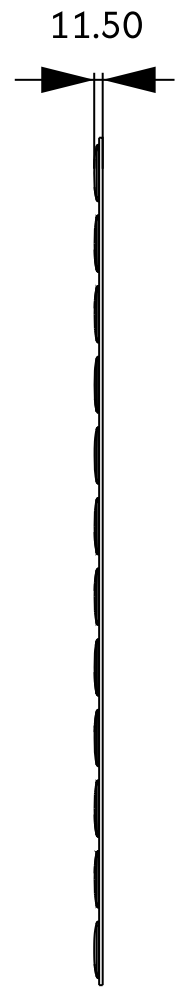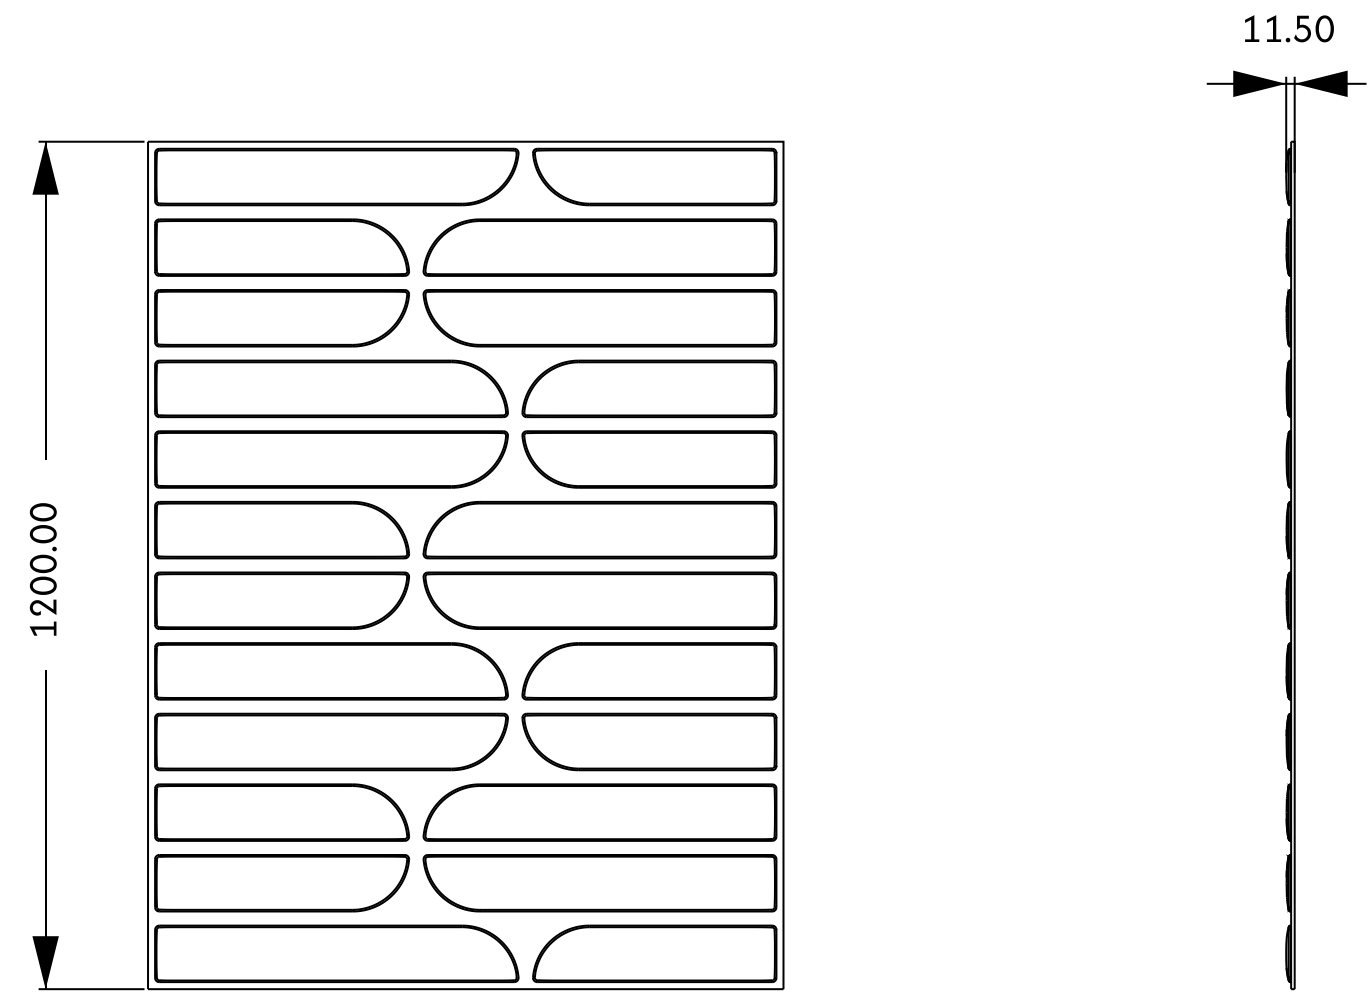




Dimensions 1200 x 900 mm (L x W)

Variant 5: Opera

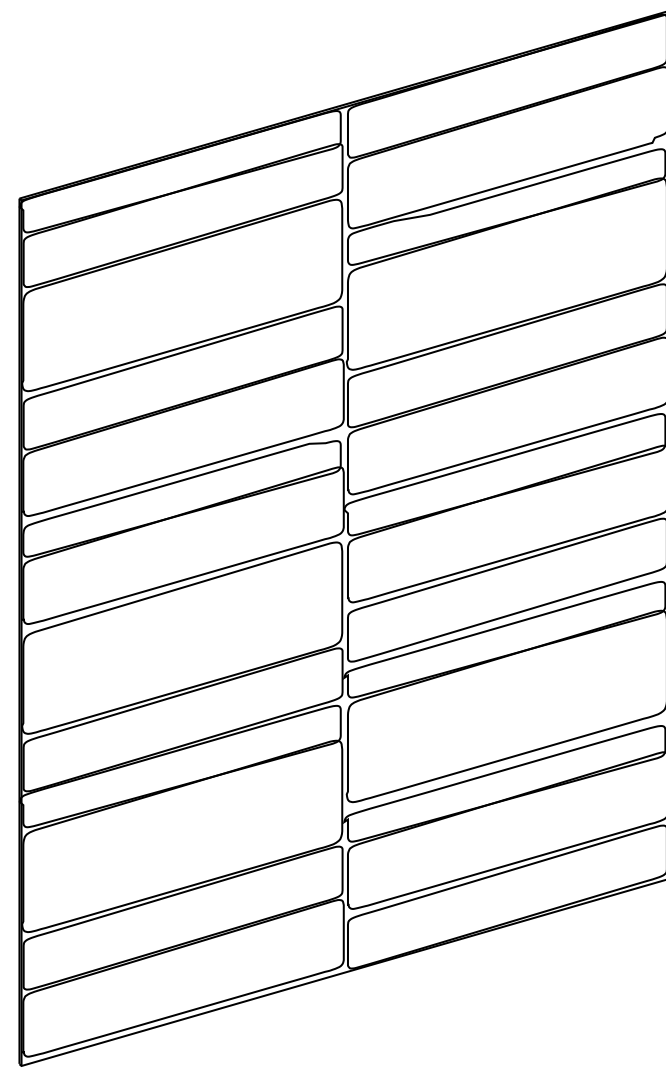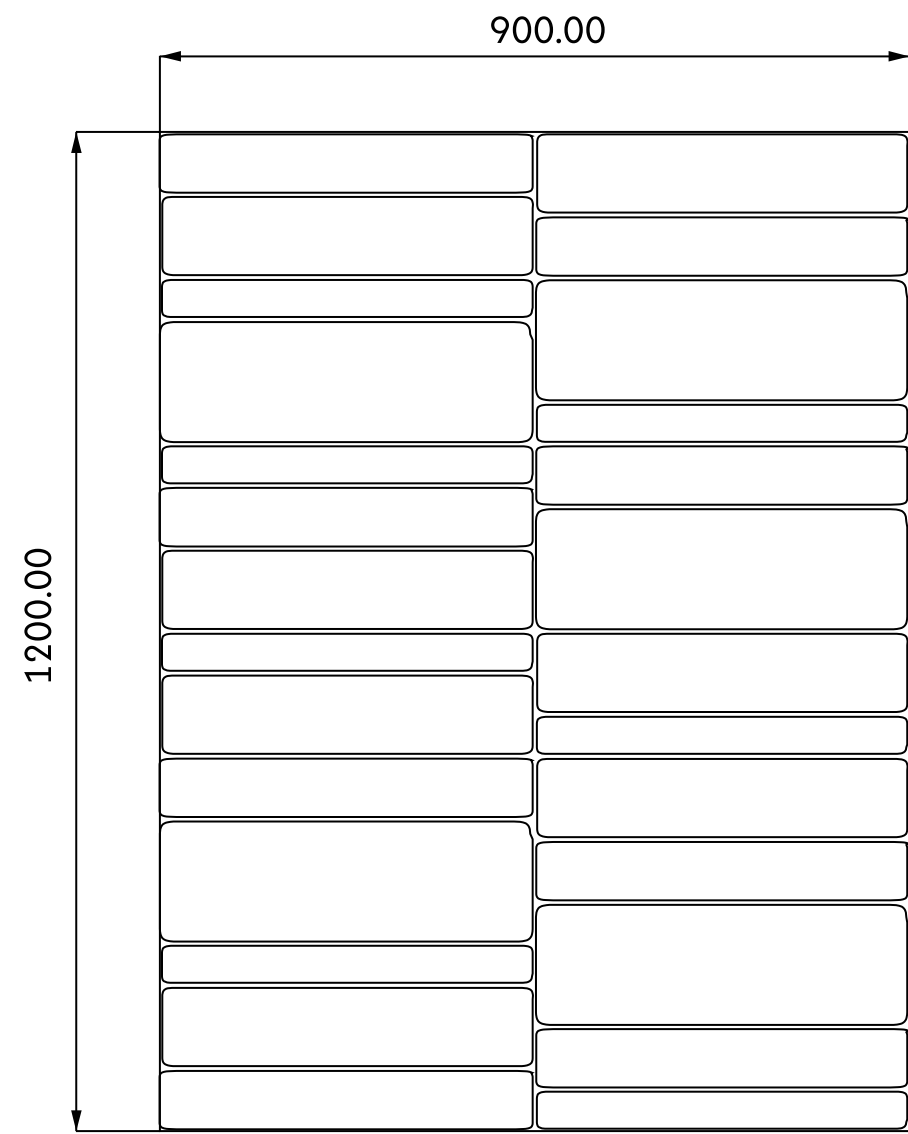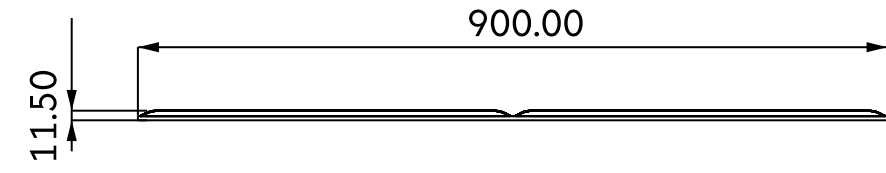


Dimensions 1200 x 900 mm (L x W)

Variant 6: Vista

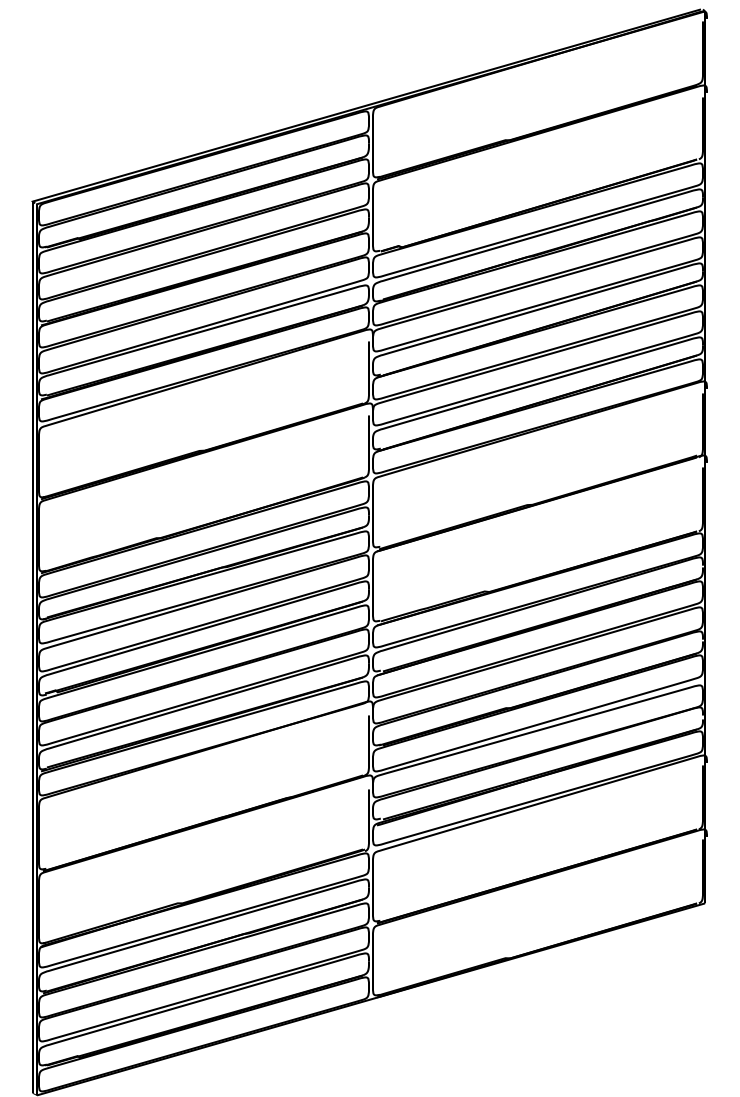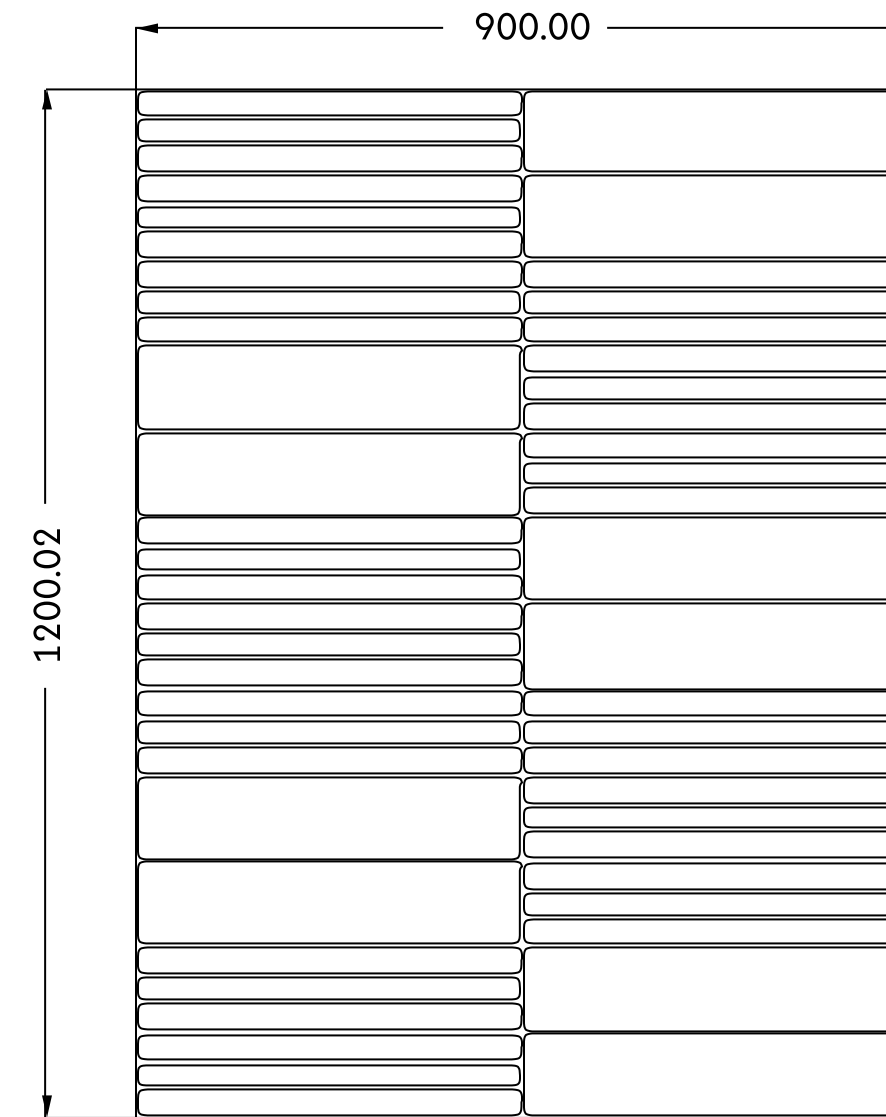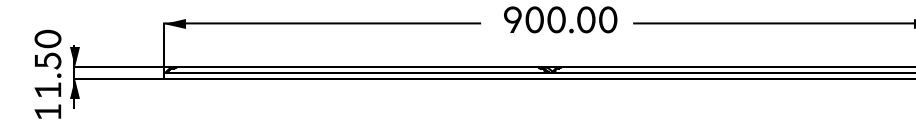


Dimensions 1200 x 900 mm (L x W)

Variant 7: Tribe

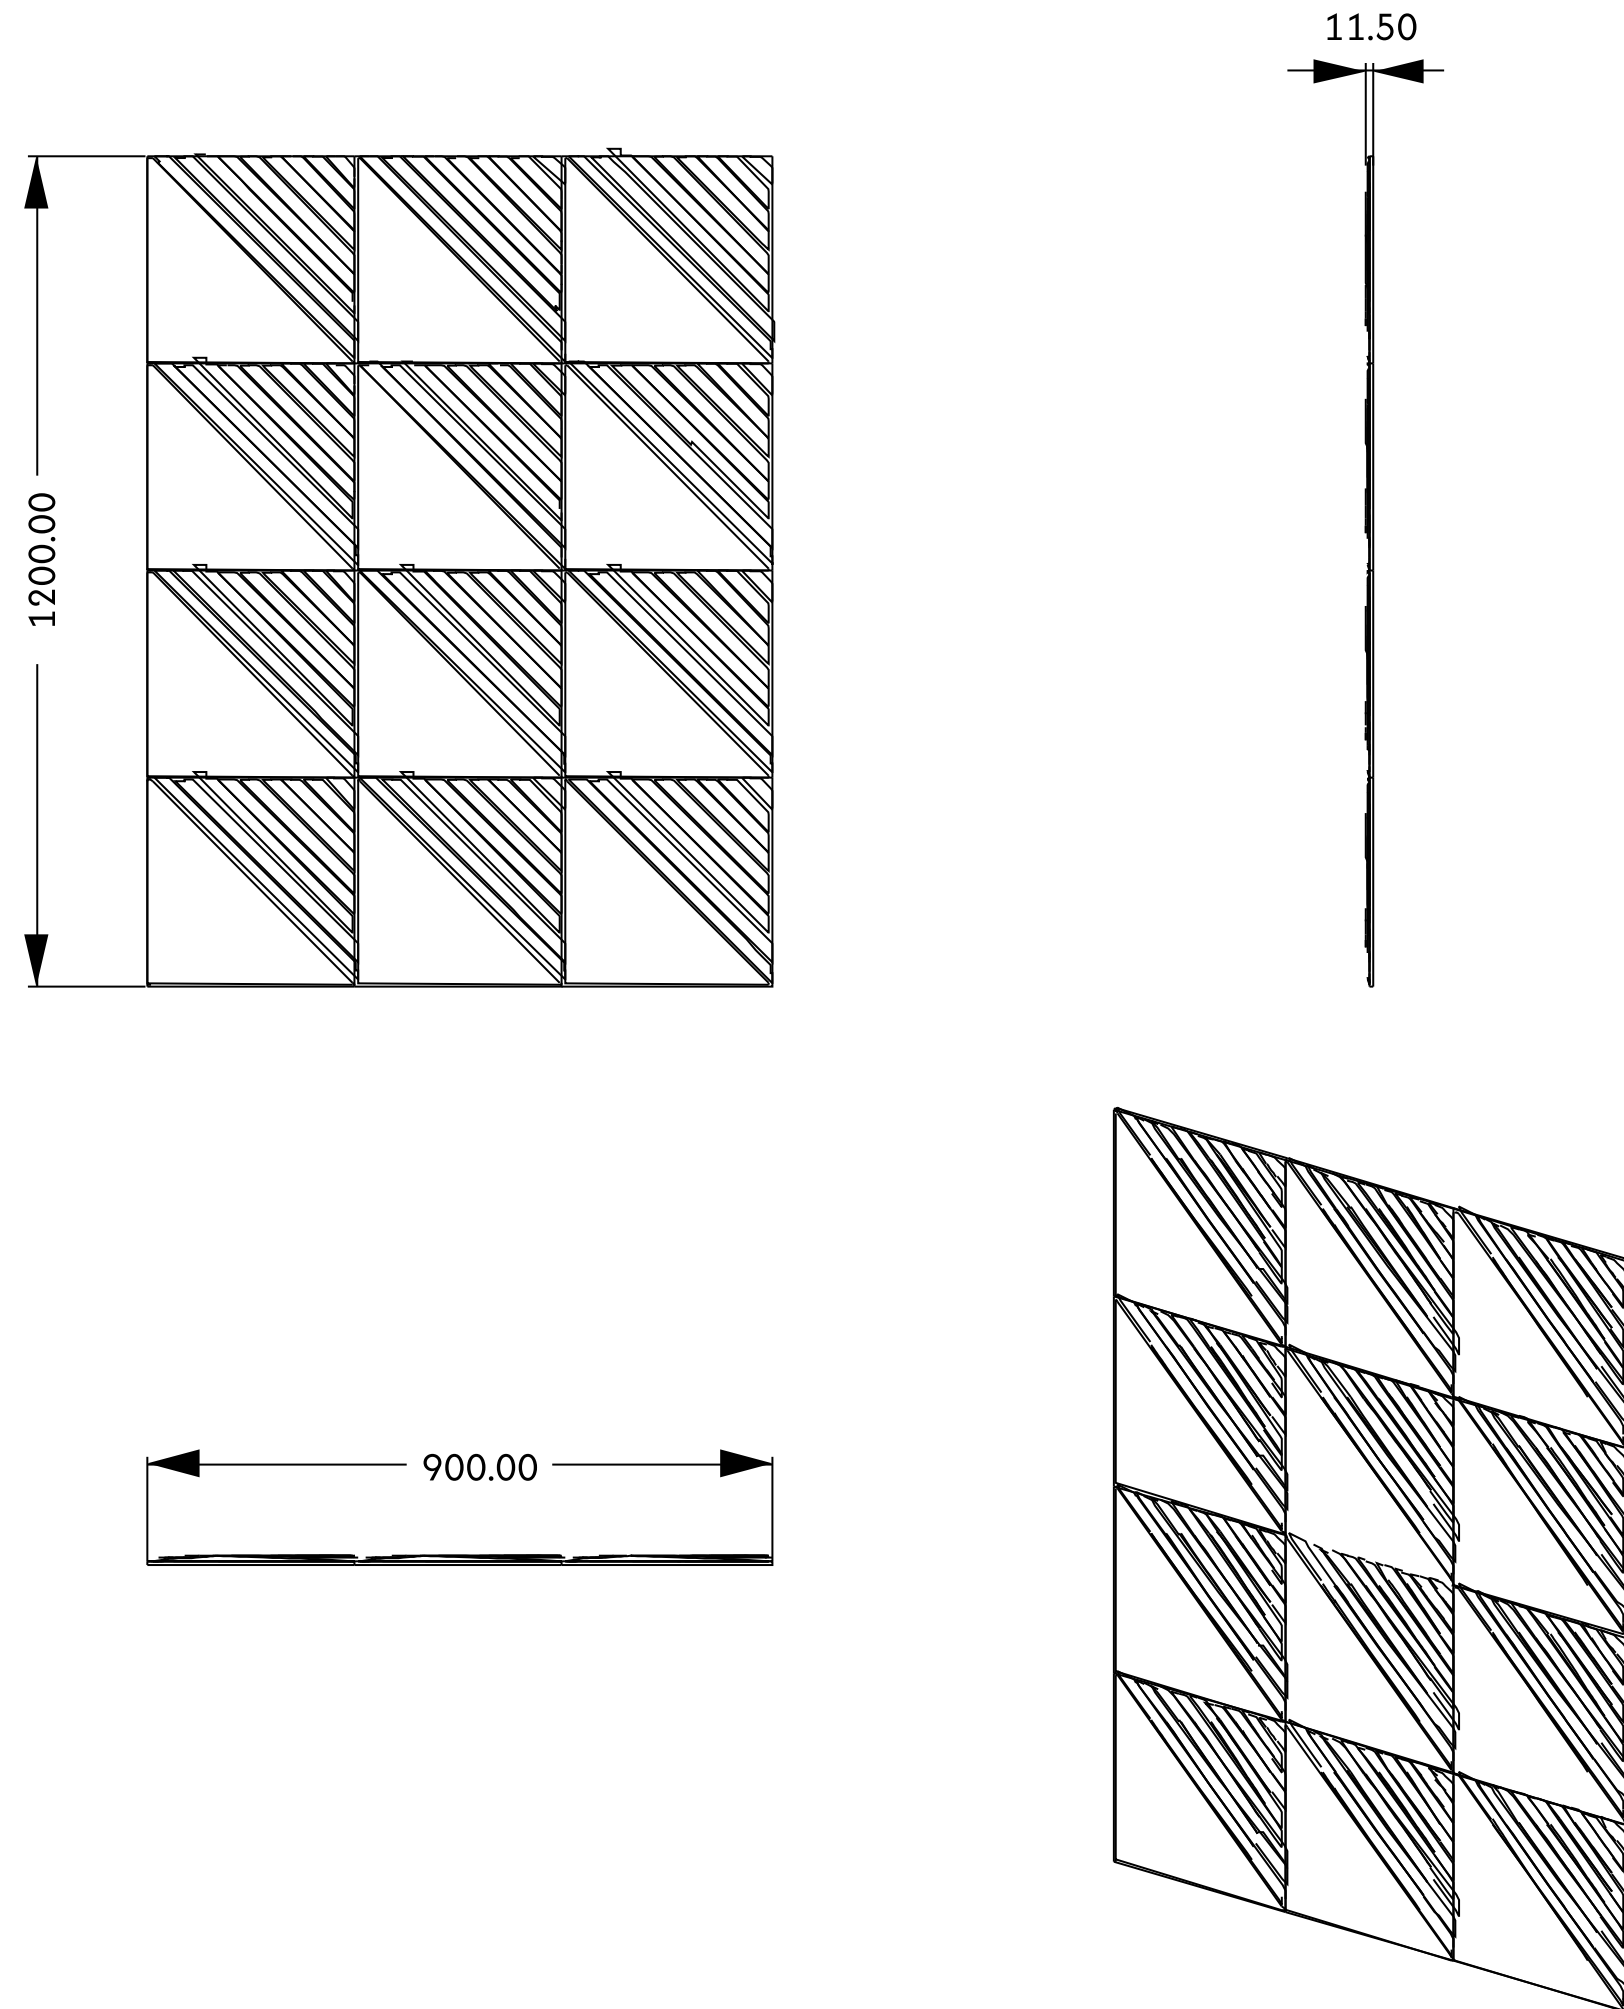




Dimensions 1200 x 900 mm (L x W)

Variant 8: Meraki

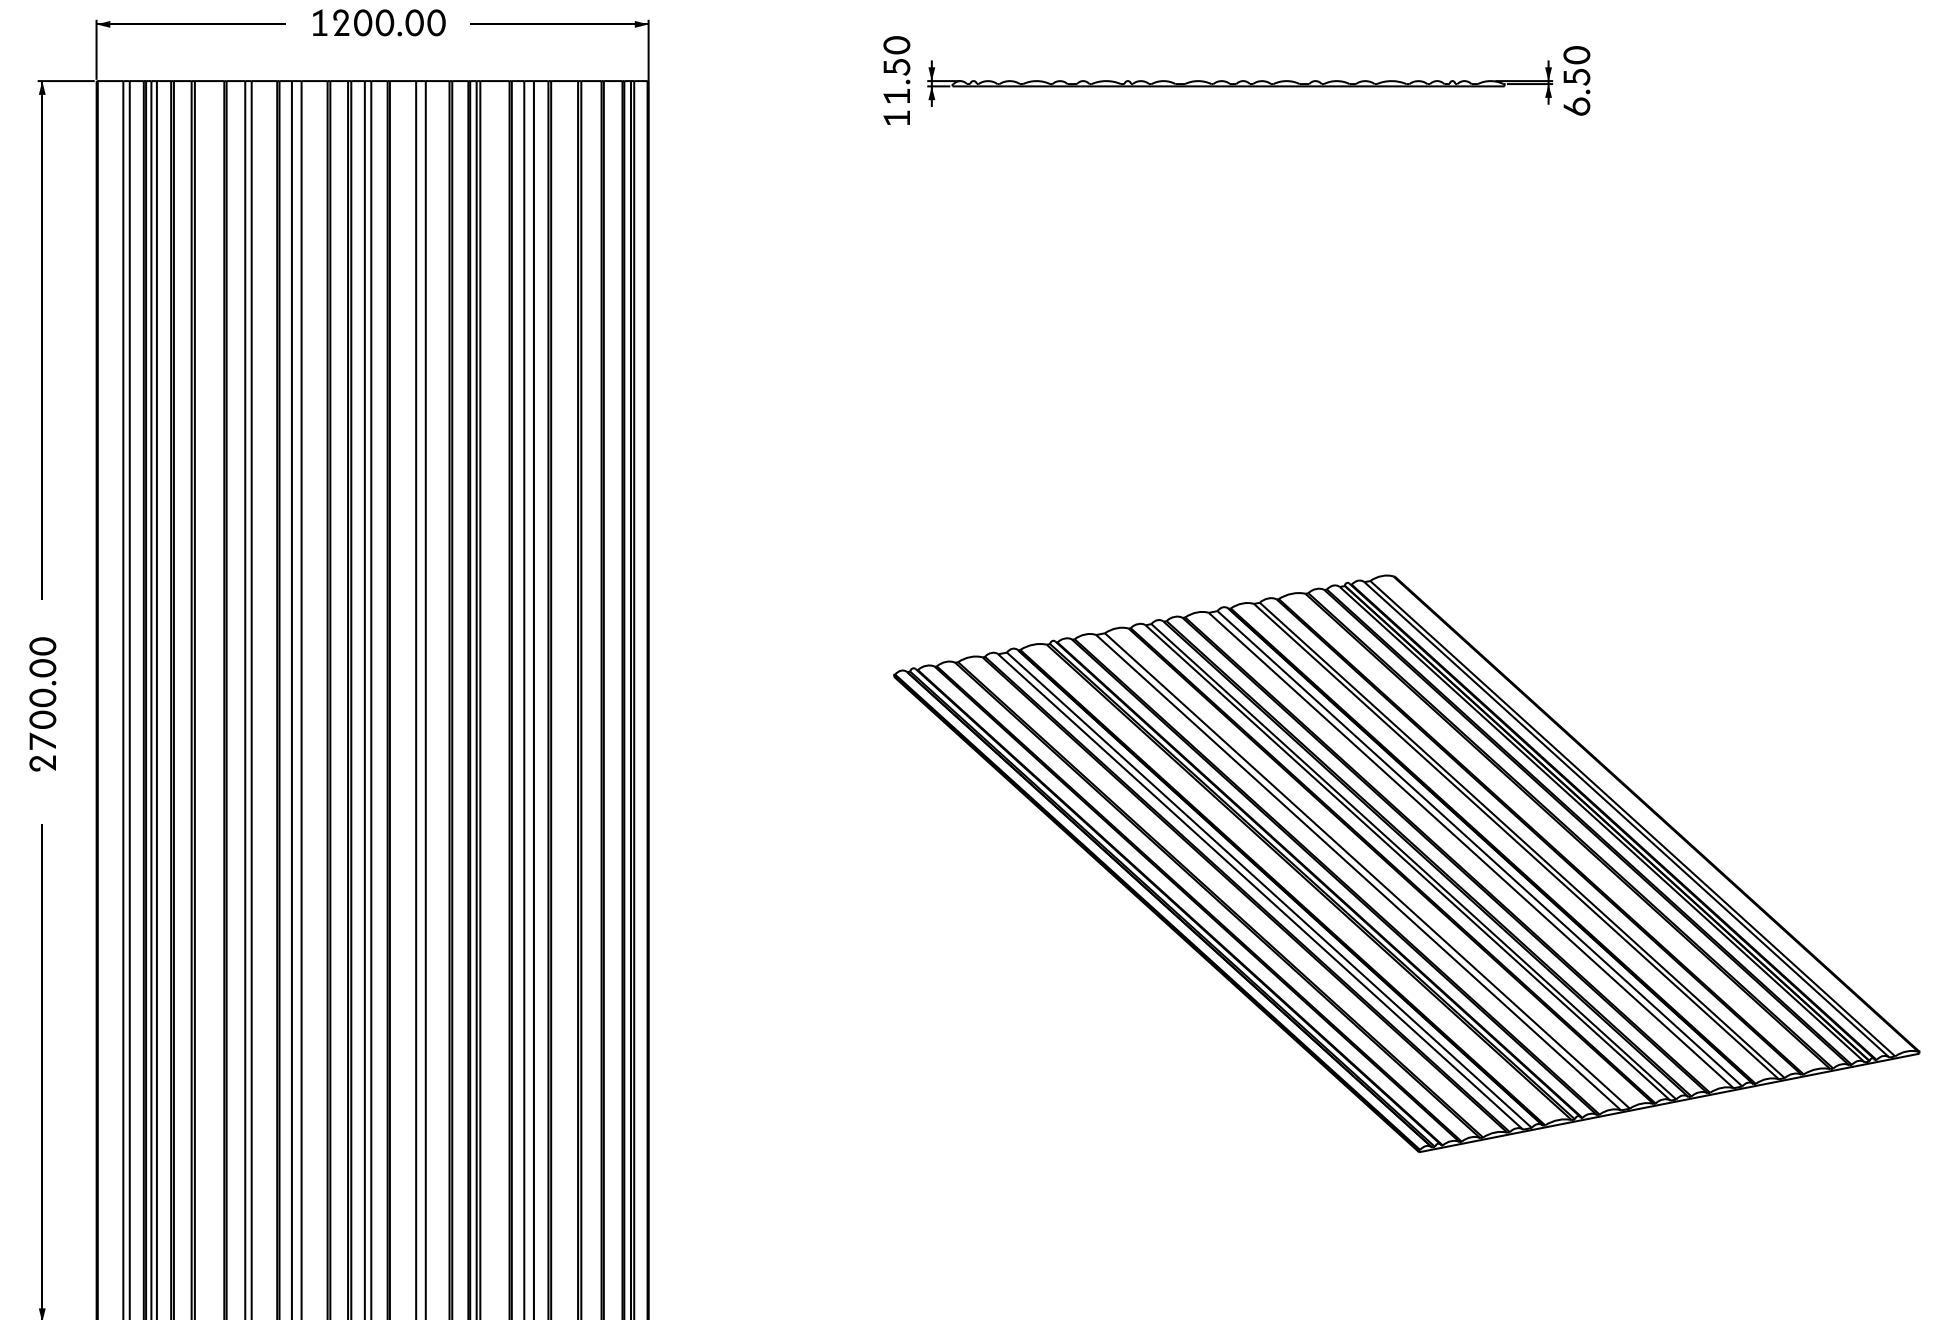




Dimensions 2700 x 1200 mm (L x W)
(Felt finish Width 1100 mm)

Variant 9: Ribbed 25

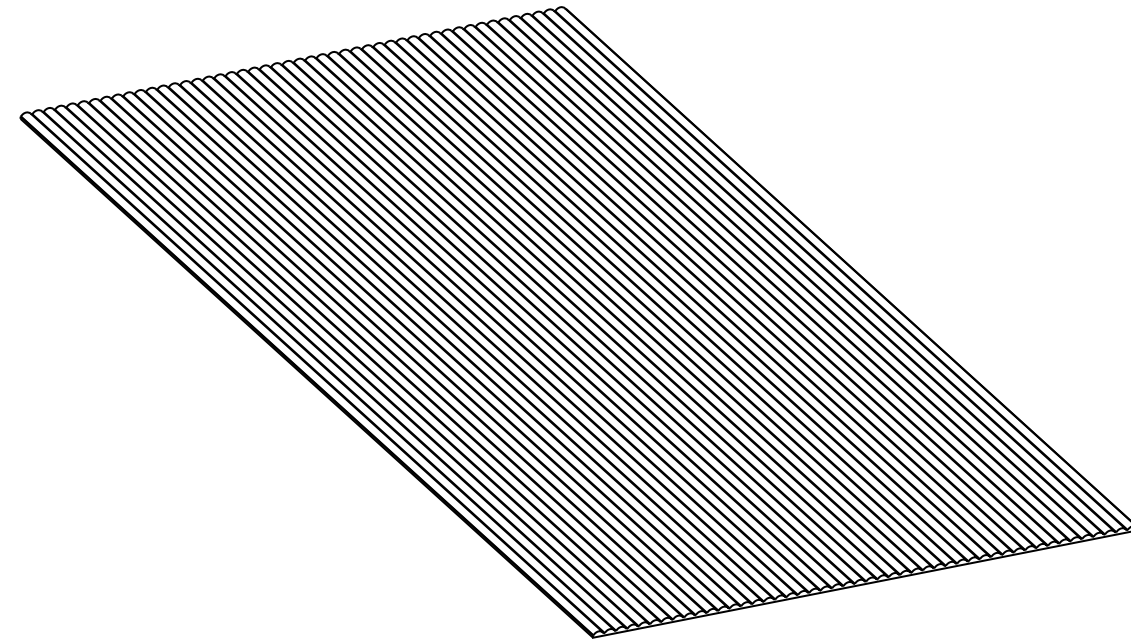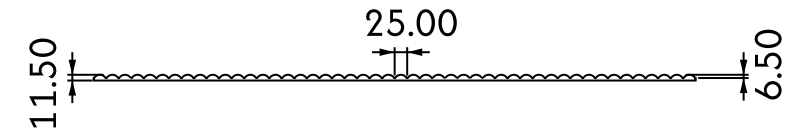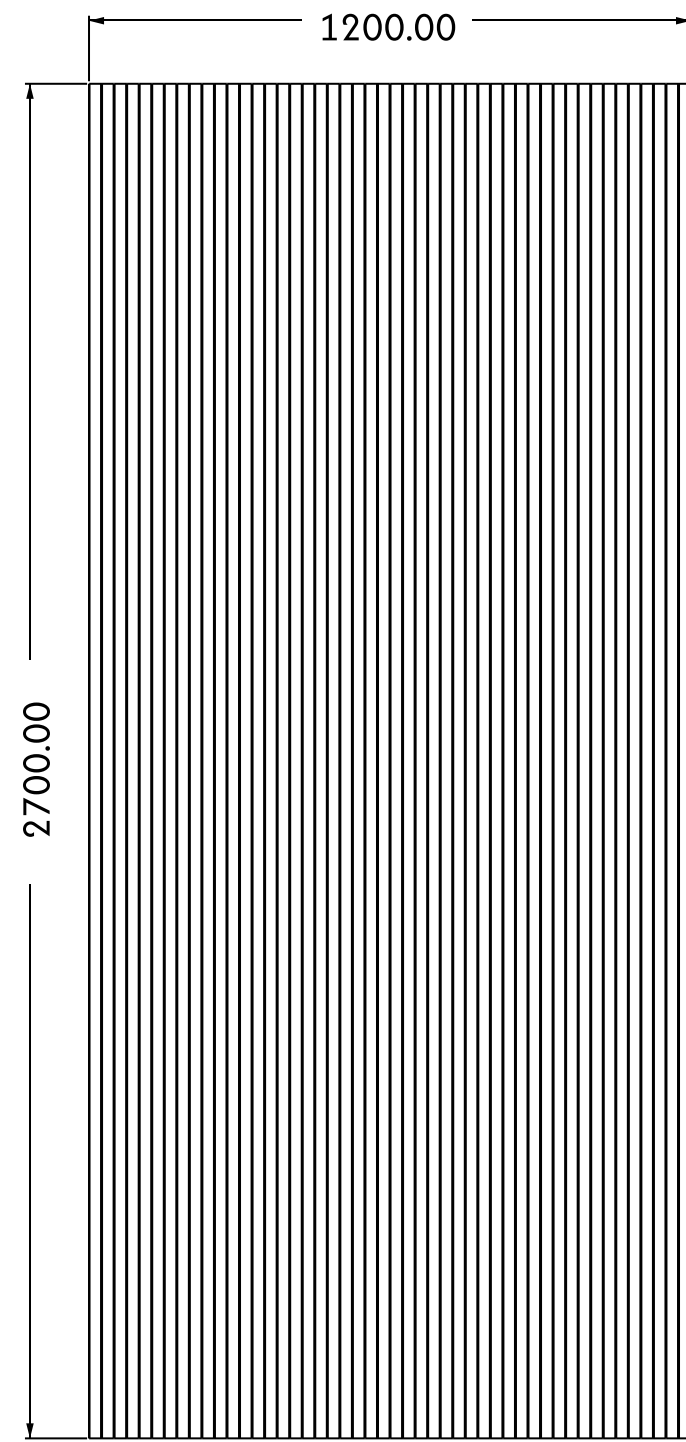




Dimensions 2700 x 1200 mm (L x W)
(Felt finish Width 1100 mm)

Variant 10: Ribbed 50

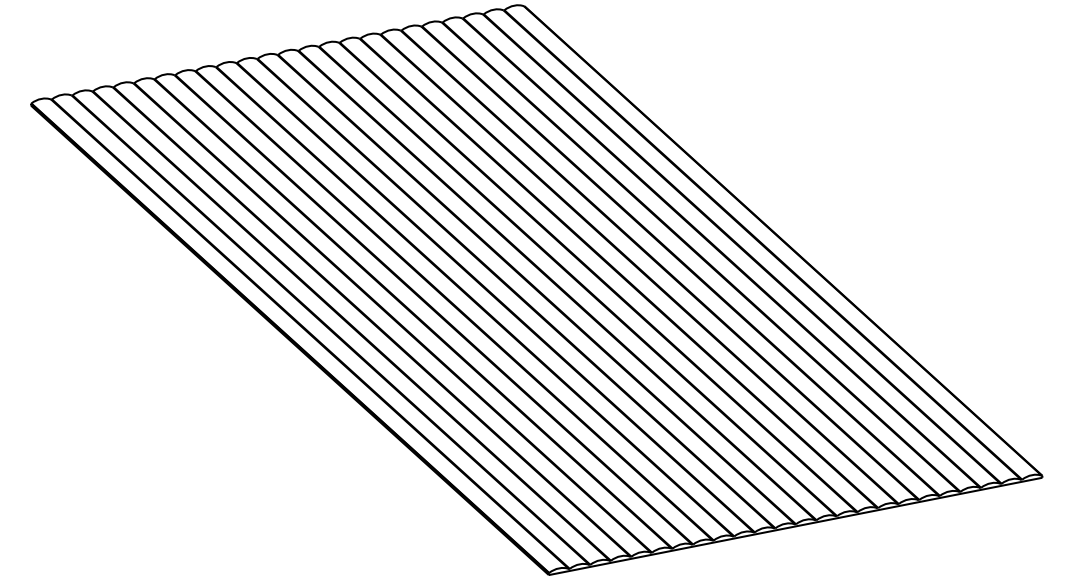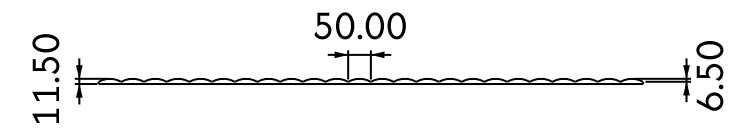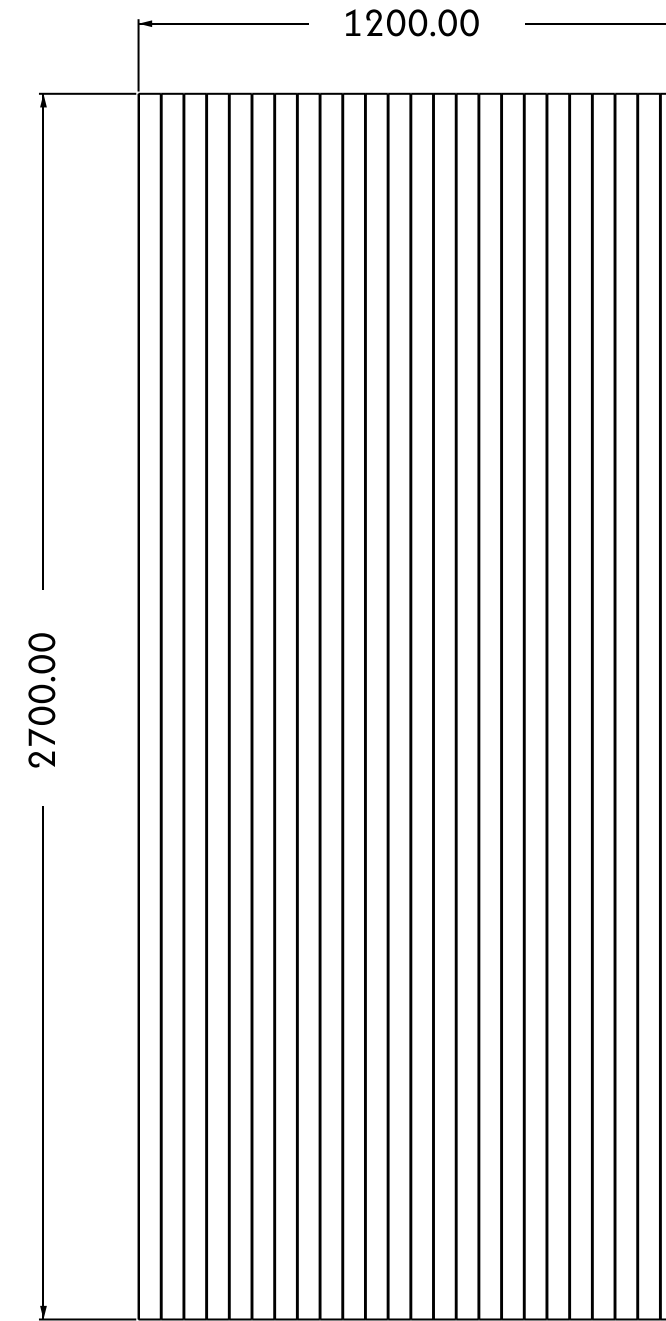

Dimensions 2700 x 1200 mm (L x W)
(Felt finish Width 1100 mm)




Variant 11: Ribbed 100

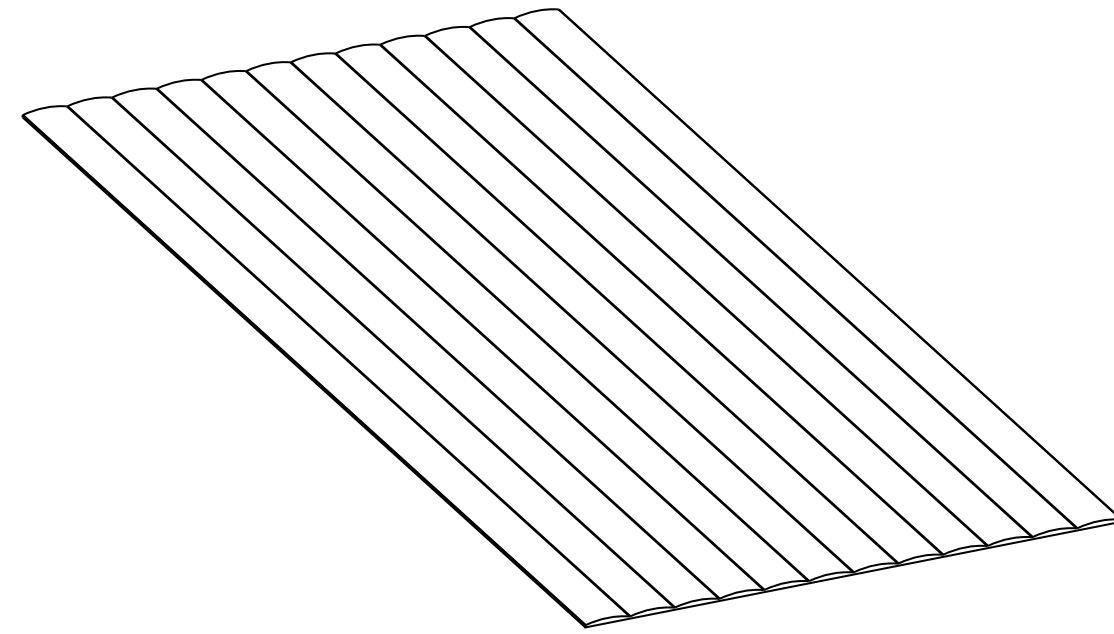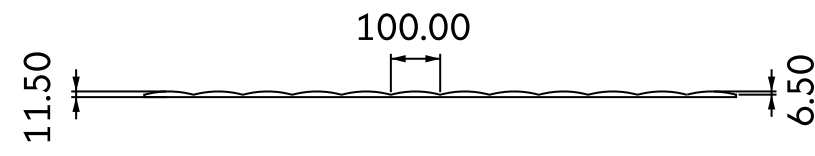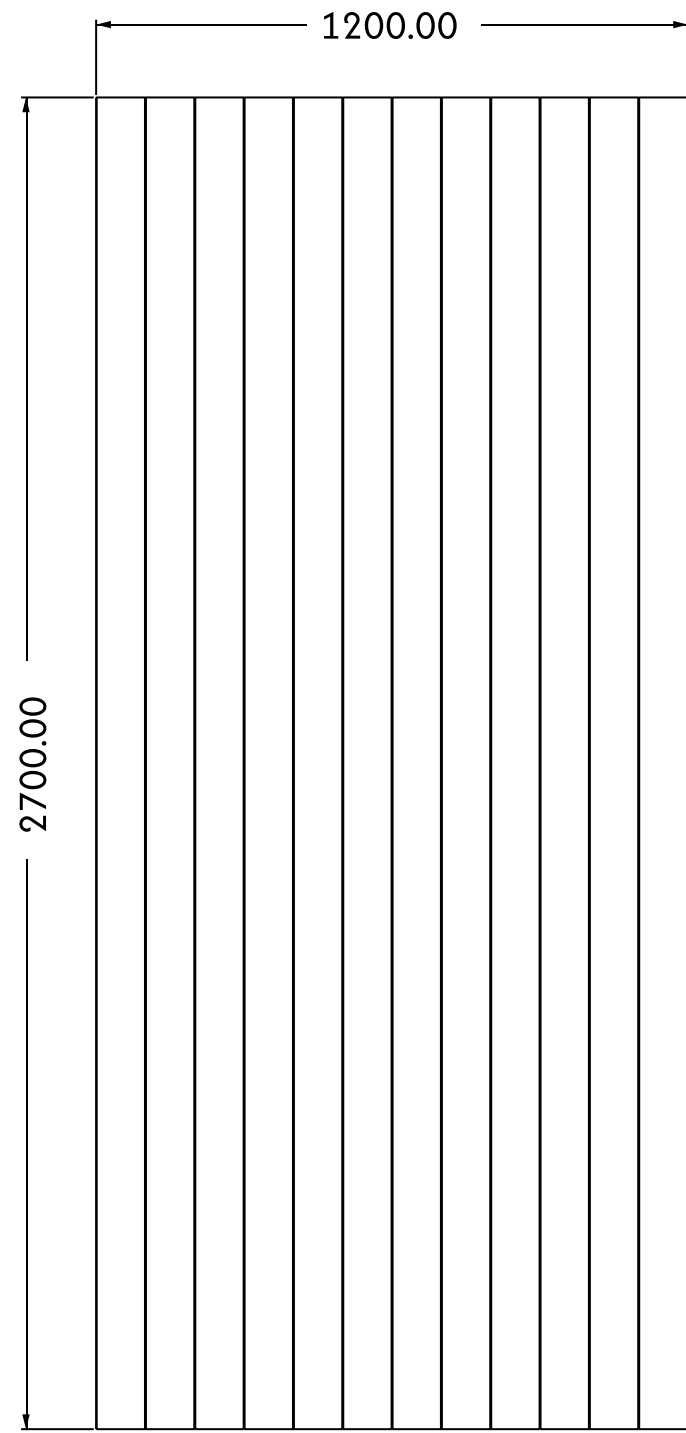

Dimensions 2700 x 1200 mm (L x W)

(Felt finish Width 1100 mm)




Variant 12: Ribbed 75

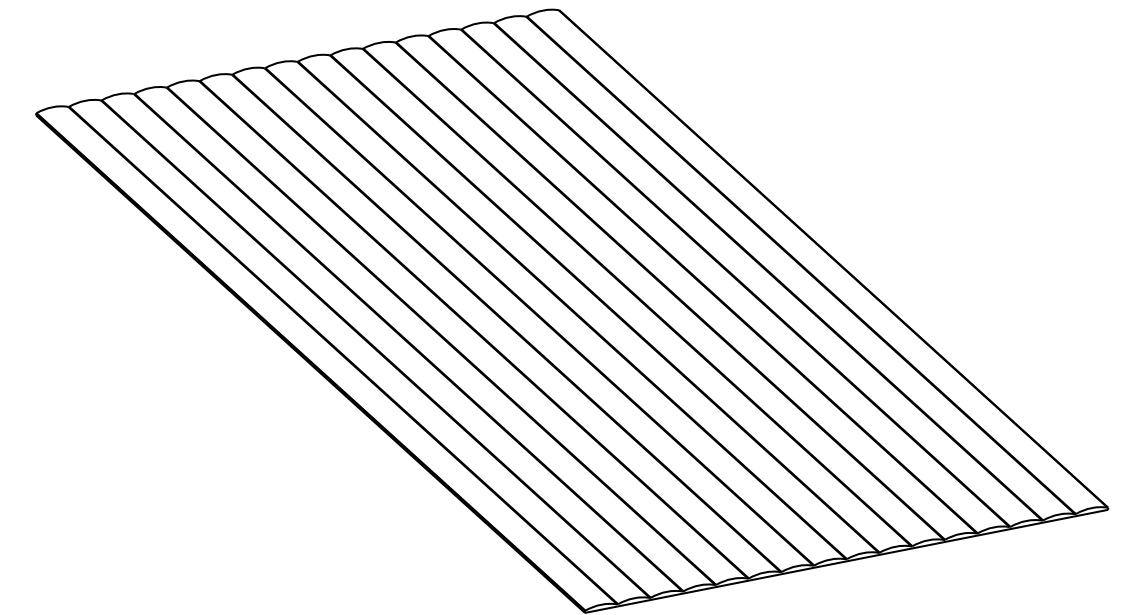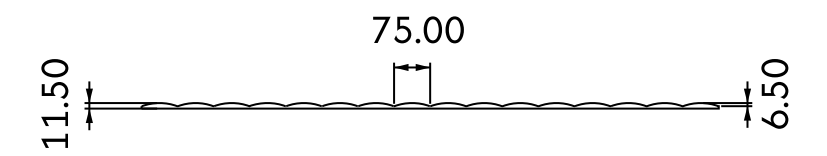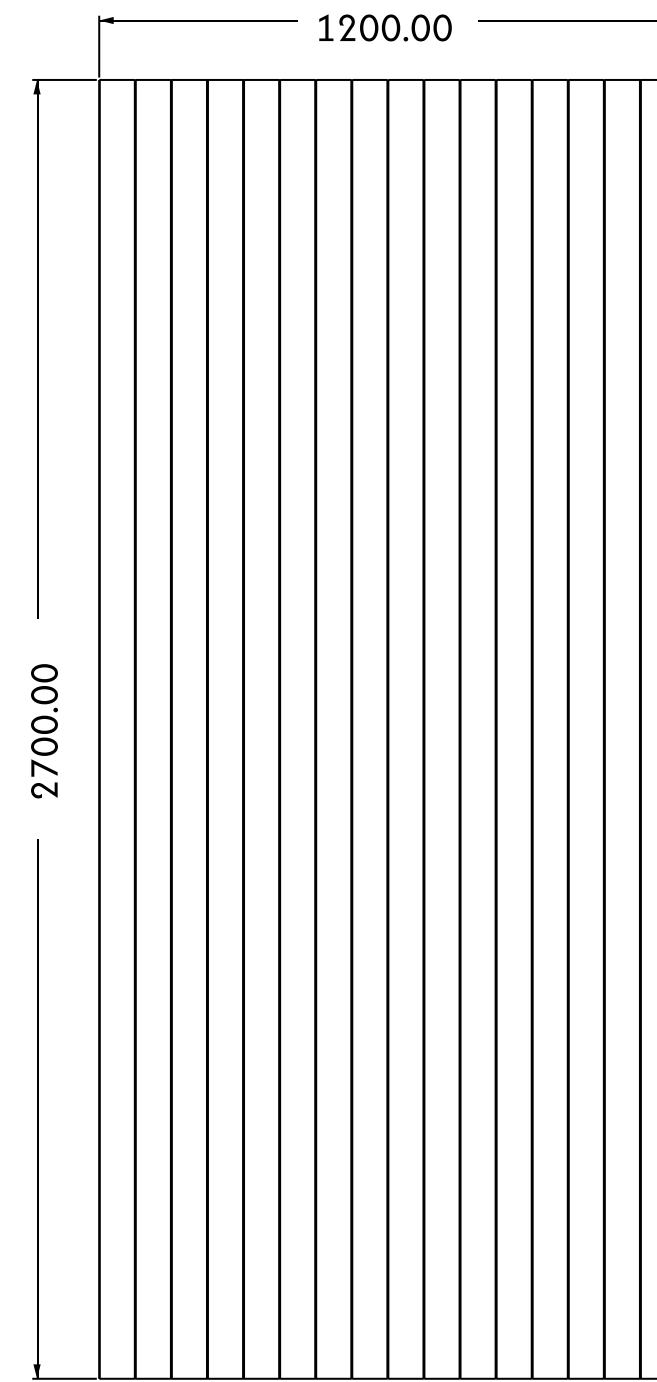

Dimensions 2700 x 1200 mm (L x W)




(Felt finish Width 1050 mm)

Variant 13: Ribbed 150

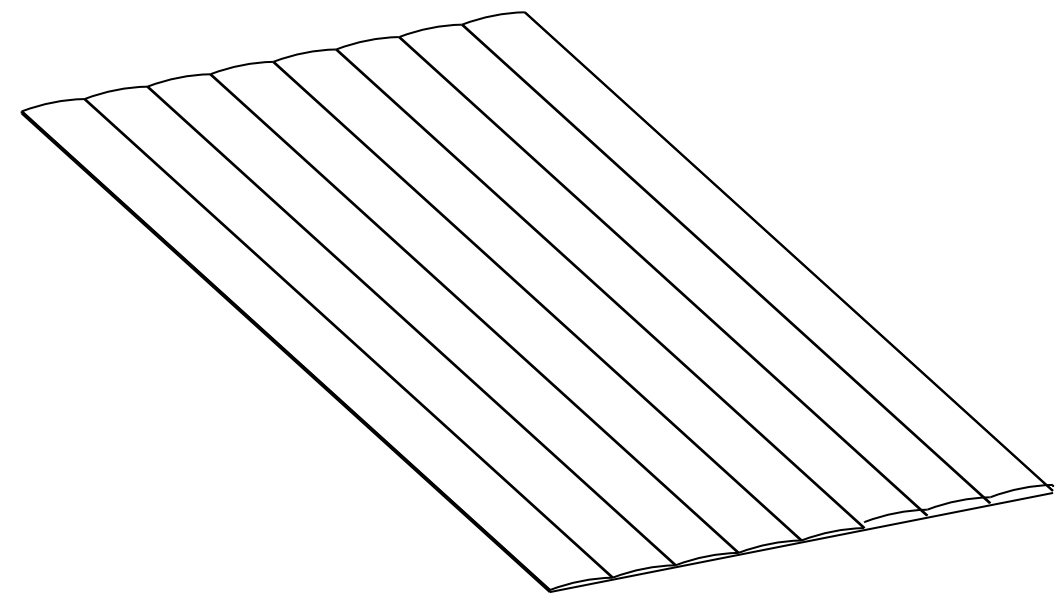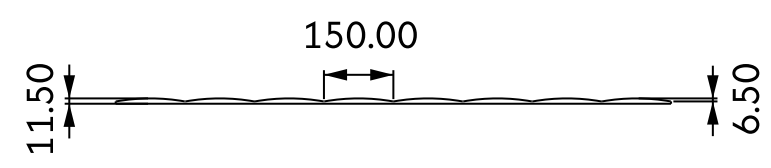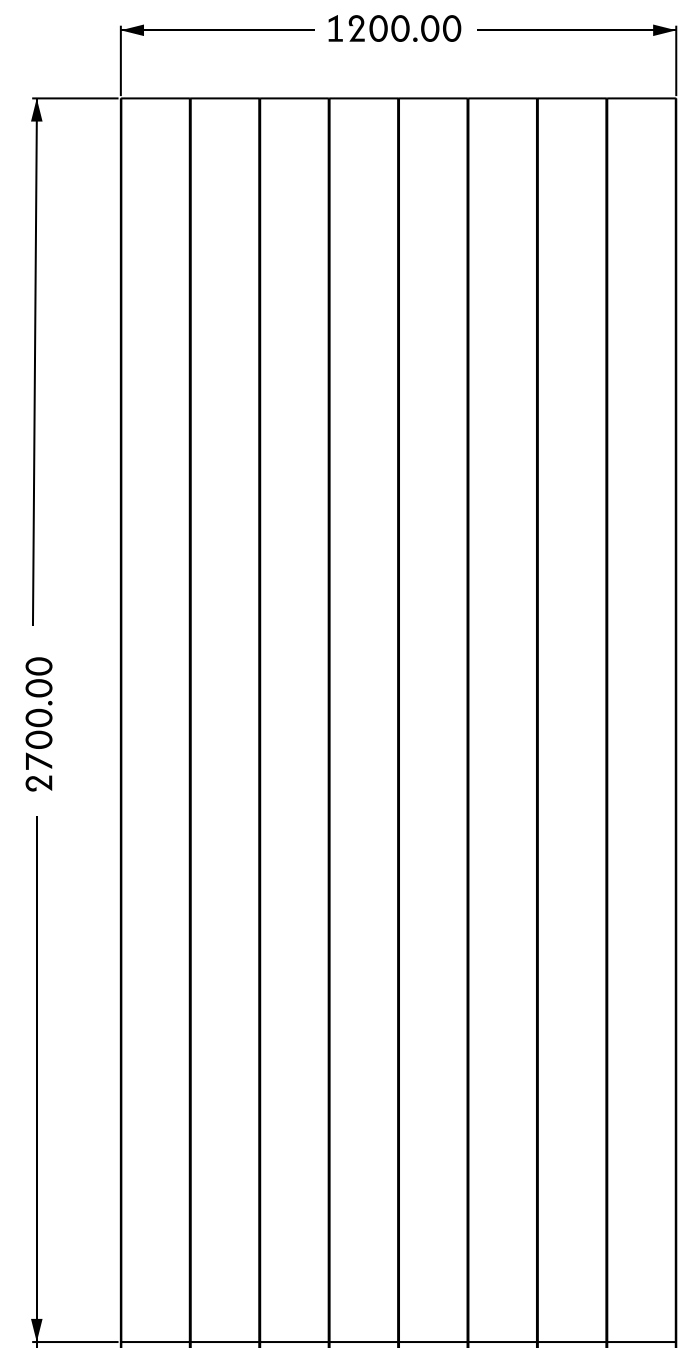



Dimensions 2700 x 1200 mm (L x W)
(Felt finish Width 1050 mm)

Variant 14: Ribbed 40

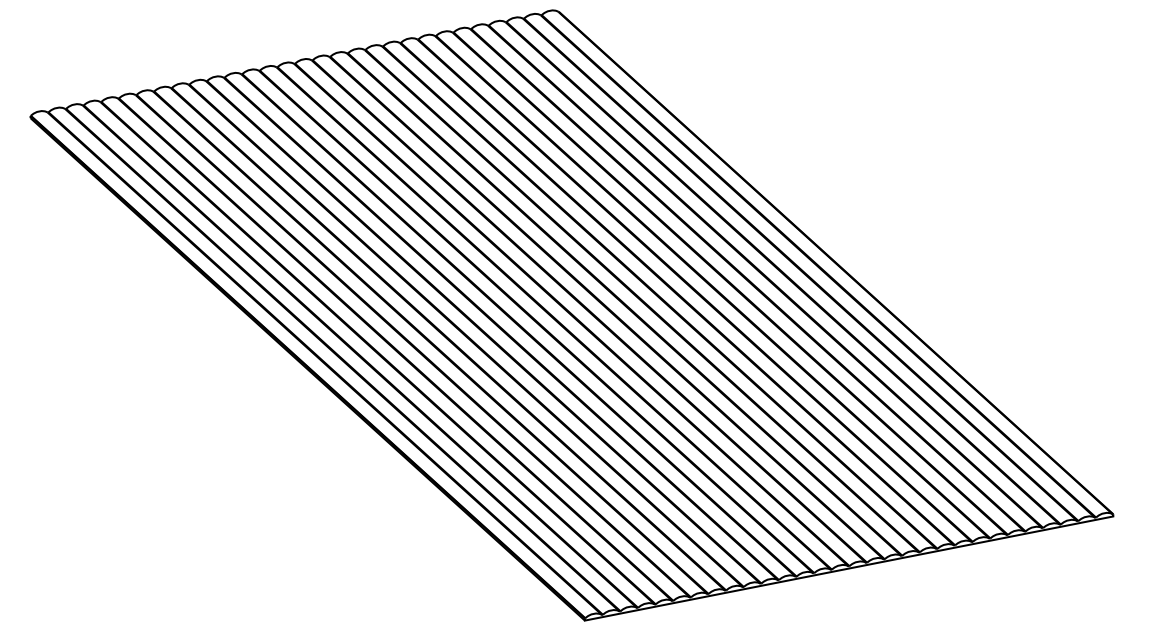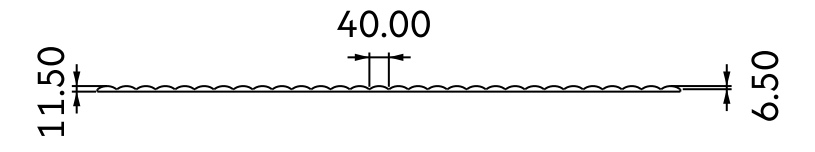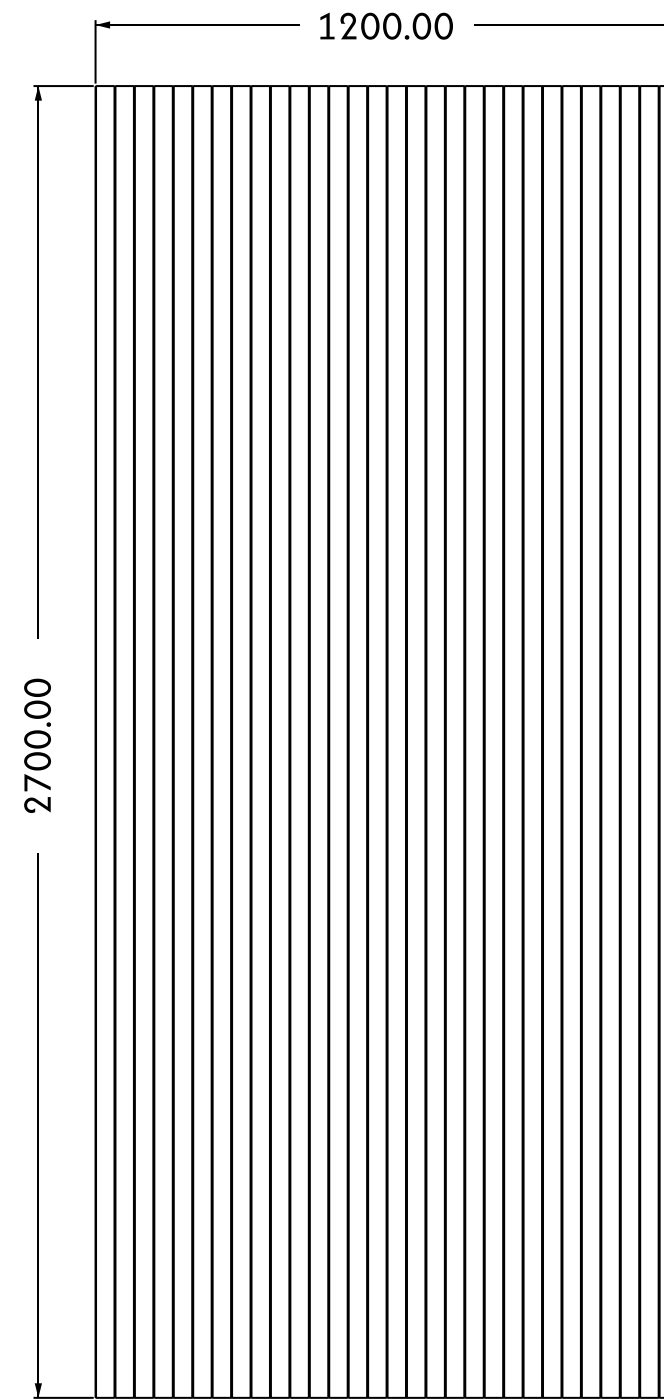

Dimensions 2700 x 1200 mm (L x W)
(Felt finish Width 1120 mm)

Variant 15: Leaf

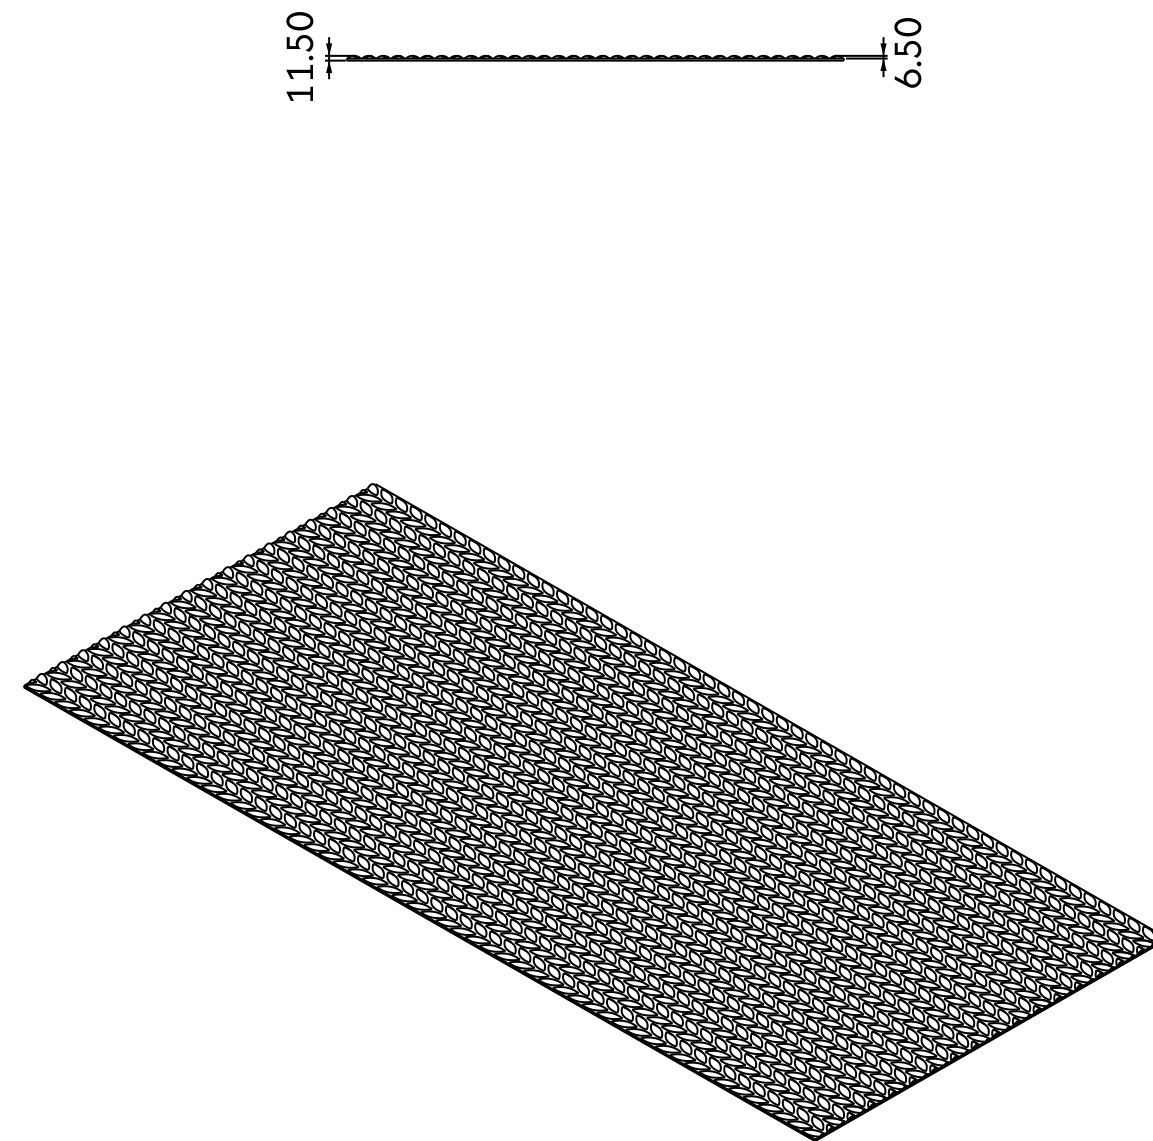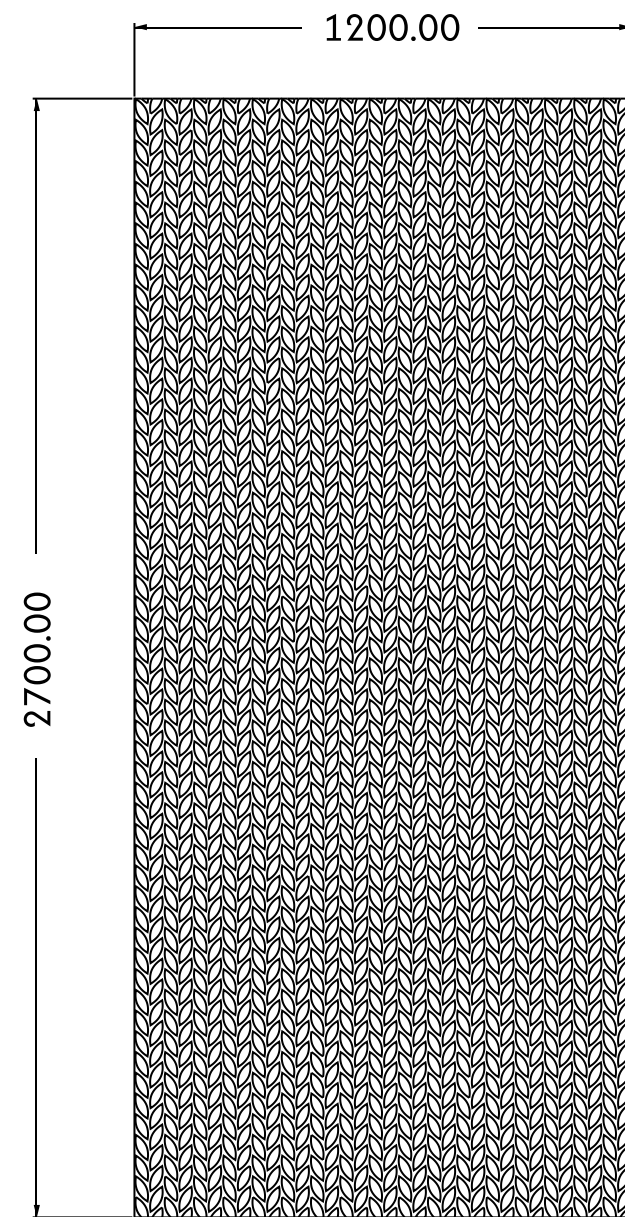



Dimensions 2700 x 1200 mm (L x W)

(Felt finish Not Applicable)

Performance

Acoustic Properties:

**ASTM C423 | NRC: 0.50 (for 12 mm thickness) |
NRC: 0.75 (for 24 mm thickness)**

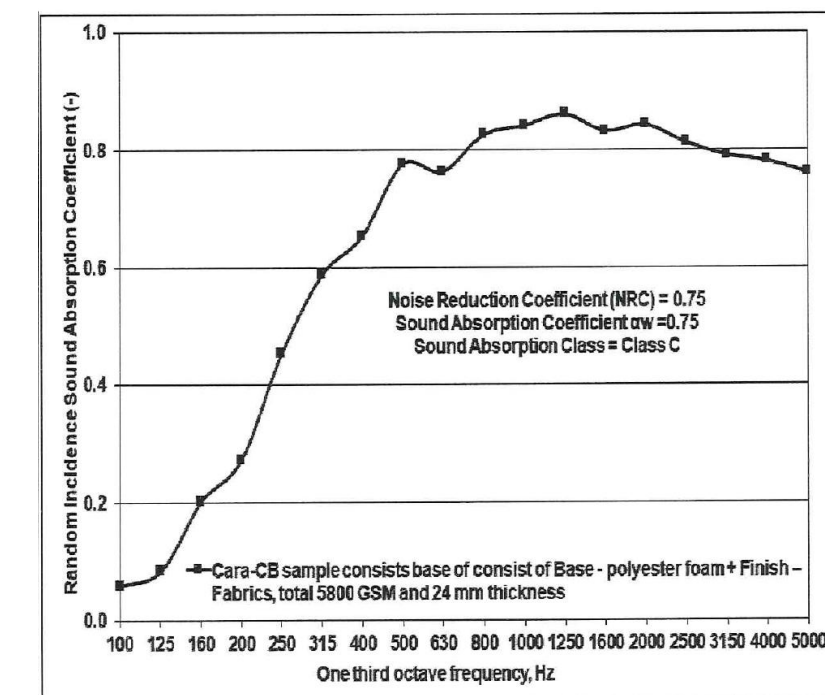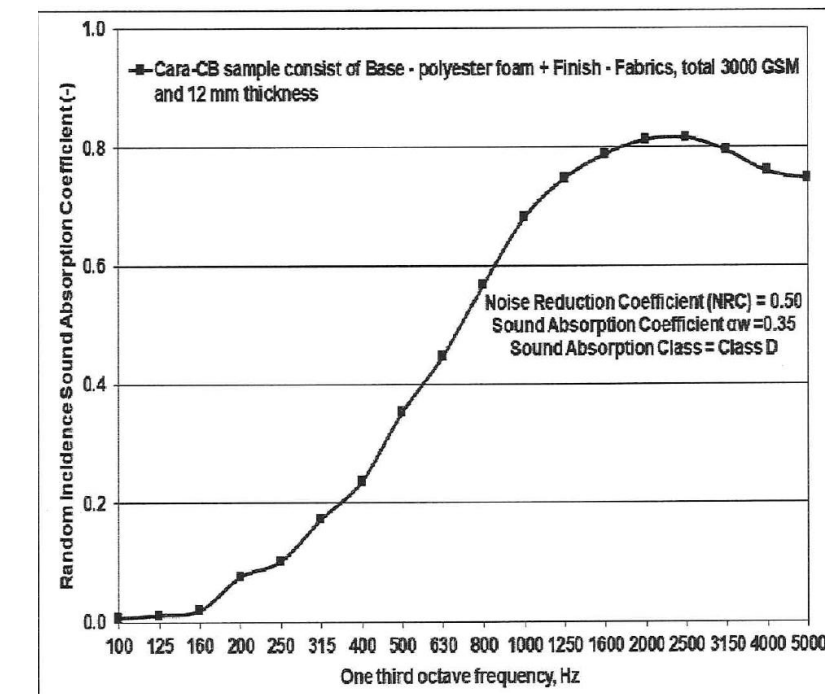

Fire Resistance:

1. Acoustic Foam (100 % PET (60% recycle content))

ASTM E84- 2021 | Flame Spread Index: Class 1 or A |

Smoke Developed Index: Class 1 or A

BS/EN 13501-1:2018 | Classification: B-s1, d0

AS/NZS 1530.3:1999 | Flame Spread Index: 0 |

Smoke Index: 2

2. Fabrics

- **Category A+**

BS 5852 Part 1: 1979 Ignition Source 0 & 1 | Details:
Cigarette Test & Match Test | Result: PASS on both tests |
Test Number: 423681

- **Category A**

BS 5852 Part 1: 1979 Ignition Source 0 & 1 |
Details: Cigarette Test & Match Test | Result:
PASS on both tests | Test Number: 187662

- **Category B**

AS/NZS 1530.3:1999 | Details: Simultaneous test for
Ignitability, Flame Propagation, Heat Release & Smoke
Release | Result: Passed | Test Number: 19-001329

- **Category D**

CA TB 117-2013 (Section 1 – Cover Fabric) | Details:
Upholstery category fabric meeting multiple international
fire resistance standards | Results: PASS

- **Category E**

BS EN 13501-1: Class C, s3, d2 | Details: In-house test
confirmed satisfactory compliance | Results: PASS |
Certificate Number: 7247-S

3. Felt

ASTM E84- 2021 | Flame Spread Index: Class 1 or A |
Smoke Developed Index: Class 1 or A
BS/EN 13501-1:2018 | Classification: B-s1, d0
AS/NZS 1530.3:1999 | Flame Spread Index: 0 |
Smoke Index: 2

VOC Emissions

CDPH Standard Method v1.2 | Section 01350 –
Low-emitting materials for schools and offices

Sustainability

Certifications & Compliance:

- LEED v4: Supports EQ Credit (Low-Emitting Materials)
- Certified Low VOC materials
- EPD & HPD certified
- Declare Label compliant
- USGBC LEED compliant



Declare.



Variants



Brick



Vista



Opera



Fusion




Ribbed



Meraki



Leaf

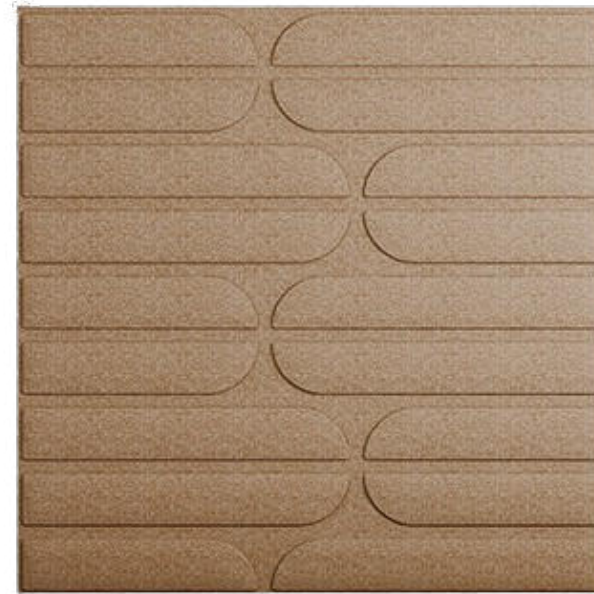

Lagom



Tribe



Fika

Fabrics


CAT A+ : COLORWAYS

BROOKLYN S




Composition	100% Polyester
Weight	330 gsm
Width	145 cm (min. usable 138 cm)
Abrasion resistance	30,000 Wyzenbeek 90,000 Martindale
Flammability	CA TB 117 - 2013 (Section 1-cover fabric)
Fastness to light	6
Fastness to rubbing	Wet - 4/5 Dry - 4/5
Pilling	4/5
Seam Slippage	Warp - 3 mm Weft - 4 mm

MANHATTAN




Composition	100% Polyester
Weight	250 gsm
Width	146 cm (min. usable 138 cm)
Abrasion resistance	100,000+ Wyzenbeek 80,000 Martindale
Flammability	CA TB 117 - 2013
Fastness to light	4
Fastness to rubbing	Wet - 3/4 Dry - 4
Pilling	Piling on Martindale - 5 Brush pilling - 5
Seam Slippage	Warp - 3.67 mm Weft - 5 mm

OMEGA



Composition	100% Polyester
Weight	230 gsm
Width	140 cm
Abrasion resistance	70,000 Martindale
Flammability	CAL 117 - 2013 (Cigarette Test, Annexure - B)
Fastness to light	4
Fastness to rubbing	Wet - 4 Dry - 5
Pilling	4
Seam Slippage	-

SOHO



Composition	100% Polyester
Weight	420 gsm
Width	145 cm (min. usable 138 cm)
Abrasion resistance	100,000+ Wyzenbeek 90,000 Martindale
Flammability	CA TB 117 - 2013 BS 5852: Part 1(1979)
Fastness to light	5
Fastness to rubbing	Wet - 4 Dry - 4/5
Pilling	Piling on Martindale - 3/4 Brush pilling - 5
Seam Slippage	Warp - 2.5 mm Weft - 3 mm


CAT A : COLORWAYS

GLASGOW




Composition	100% Polyester
Weight (per surface)	265 gsm
Width	145 cm (min. usable 138 cm)
Abrasion resistance	84,000 Wyzenbeek >100,000 Martindale
Flammability	CA TB 117 - 2013 BS 5852 Source 0,1 (cigarette & match) EN 1021 Part1,2 (cigarette & match)
Fastness to light	5
Fastness to rubbing	Wet - 3/4 Dry - 4
Pilling	3/4
Seam Slippage	Warp - 4 mm Weft - 4 mm

SHETLAND



Composition	100% Polyester
Weight (per surface)	280 gsm
Width	145 cm (min. usable 138 cm)
Abrasion resistance	>100,000 Wyzenbeek 45,000 Martindale
Flammability	BS 5852: Part 1 (1979) CA TB 117-2013
Fastness to light	5
Fastness to rubbing	Wet - 4 Dry - 4/5
Pilling	Martindale Pilling - 4 Brush Pilling - 5
Seam Slippage	Warp - 1.67 mm Weft - 2 mm

QUARTZ



Composition	100% Polyester
Weight (per surface)	360 gsm
Width	142 cm (min. usable 138 cm)
Abrasion resistance	100,000 Wyzenbeek 90,000 Martindale
Flammability	CA TB 117 - 2013
Fastness to light	4/5
Fastness to rubbing	Wet - 4 Dry - 4/5
Pilling	Martindale Pilling - 5 Brush Pilling - 5
Seam Slippage	Warp - 3 mm Weft - 3 mm

TWEED



Composition	100% Polyester
Weight (per surface)	240 gsm
Width	142 cm (min. usable 138 cm)
Abrasion resistance	54,000 Wyzenbeek 100,000 Martindale
Flammability	CA TB 117 - 2013 BS 5852 Source 0,1 (cigarette & match) EN 1021 Part1,2 (cigarette & match)
Fastness to light	5
Fastness to rubbing	Wet - 4 Dry - 4/5
Pilling	3/4
Seam Slippage	Warp - 2 mm Weft - 2 mm


CAT B : COLORWAYS

BEDFORD




Composition	100% Polyester
Weight (per surface)	370 gsm
Width	142 cm
Abrasion resistance	147,500 Martindale
Flammability	AS/NZS 1530.3 - 1999
Fastness to light	6
Fastness to rubbing	Wet - 5 Dry - 5
Pilling	5
Seam Slippage	Warp - 3.9 mm Weft - 4.6 mm
Attributes	Halo Easy Care, Oekotex Standard 100

BROOKLYN




Composition	100% Polyester
Weight (per surface)	355 gsm
Width	142 cm
Abrasion resistance	115,000 Martindale
Flammability	AS/NZS 1530.3 - 1999
Fastness to light	>6
Fastness to rubbing	Wet - 5 Dry - 5
Pilling	5
Seam Slippage	Warp - 4.4 mm Weft - 4.4 mm
Attributes	Halo Easy Care, Oekotex Standard 100

BUCKLEY



Composition	100% Polyester
Weight (per surface)	350 gsm
Width	142 cm
Abrasion resistance	50,000 Martindale
Flammability	AS/NZS 1530.3 - 1999
Fastness to light	6
Fastness to rubbing	Wet - 4/5 Dry - 4/5
Pilling	3/4
Seam Slippage	Warp - 5.5 mm Weft - 5 mm
Attributes	Halo Easy Care, Oekotex Standard 100

ELTON



Composition	100% Polyester
Weight (per surface)	275 gsm
Width	140 cm
Abrasion resistance	70,000 Wyzenbeek
Flammability	AS/NZS 1530.3 - 1999
Fastness to light	5
Fastness to rubbing	Wet - 4/5 Dry - 4/5
Pilling	5
Seam Slippage	Warp - 3.3 mm Weft - 3 mm
Attributes	Halo Easy Care, Oekotex Standard 100


FELIX



Composition	100% Polyester
Weight (per surface)	380 gsm
Width	142 cm
Abrasion resistance	100,000 Wyzenbeek
Flammability	AS/NZS 1530.3 - 1999
Fastness to light	6
Fastness to rubbing	Wet - 5 Dry - 5
Pilling	5
Seam Slippage	Warp - 2 mm Weft - 1.5 mm
Attributes	Halo Easy Care, Oekotex Standard 100


CAT D : COLORWAYS

CARRARA




Composition	Vinyl, 100% polyester backing
Weight	695 gsm (± 45)
Width	137 cm (+5 cm)
Abrasion	No significant wear after 300000 cycles
Flammability	IMO MSC 88/26/ADD, 2PART 8 (3,1 and 3,2) EN1021 (Part 1 & 2) BS 5852 Source 0,1 (Cigarette & Match) NF P 92-503(M2) DIN 4102 (B2) SN 198'898 & VKF AS.1530.03 FAR 25-853 R118 Annex 6,7,8 ISO 3795 ≤ 100 mm/min (FMVSS302)

NATURAL LINEN



Composition	Vinyl, 100% polyester backing
Weight	695 gsm (± 45)
Width	137 cm (+5 cm)
Abrasion	No significant wear after 300000 cycles
Flammability	EN1021 (Part 1 & 2) IMO MSC 88/26/ADD, 2PART 8 (3,1 and 3,2) NF P 92-503(M2) DIN 4102 (B2) AS.1530.03 FAR 25-853 R118 Annex -6, -7, -8 ISO 3795 ≤ 100 mm/min (FMVSS302)


SUNDANCE



Composition	Vinyl, 100% polyester backing
Weight	695 gsm (± 45)
Width	137 cm (+3 cm)
Abrasion	No significant wear after 300000 cycles
Flammability	EN1021 (Part 1 & 2) NF P 92-503 (M2) DIN 4102-1 (B2) AS.1530.03 FAR 25-853 R118 Annex -6, -7, -8 ISO 3795 ≤ 100 mm/min (FMVSS302)


CAT E : COLORWAYS

ARIK




Composition	100% Polyester
Weight (per surface)	289 gsm
Width	140 cm/55 inch
Abrasion resistance	65,000 Martindale
Sound Absorption	Alpha value 0.80
Fastness to light	5 - 6
Pilling	4 - 5
Flammability	BS 5852 BS 5867

ARNO



Composition	100% Flame retardant (Trevira CS)
Weight (per surface)	381 gsm
Width	140 cm/55 inch
Abrasion resistance	45,000 Martindale
Sound Absorption	Alpha value 0.90
Fastness to light	4 - 5
Pilling	4 - 5
Flammability	BS 5852


MIDNIGHT



Composition	100% Polyester flame retardant
Weight (per surface)	360 gsm
Width	300 cm / 118 inch
Abrasion resistance	45,000 Martindale
Sound Absorption	-
Fastness to light	5
Pilling	-
Flammability	BS 5867


COLORLINE

PLAIN



Composition	100% PET (60% Recycle Content)
Thickness	12 mm ($\pm 10\%$), 24 mm ($\pm 10\%$)
Flammability	Class 1 or A (ASTM E84)
Smoke Development Index	288 (ASTM E84)

GRADIENT



Composition	100% PET (60% Recycle Content)
Thickness	12 mm ($\pm 10\%$), 24 mm ($\pm 10\%$)
Flammability	Class 1 or A (ASTM E84)
Smoke Development Index	288 (ASTM E84)

TEXTURE



Composition	100% PET (60% Recycle Content)
Thickness	12 mm ($\pm 10\%$), 24 mm ($\pm 10\%$)
Flammability	Class 1 or A (ASTM E84)
Smoke Development Index	288 (ASTM E84)

FELT

FELT 1.2



Composition	100% Polyester
Thickness	1.2 mm
Width	200 gsm ($\pm 10\%$)
Flammability	Class 1 or A (ASTM E84)
Smoke Development Index	288 (ASTM E84)

 info@sensesakustik.com

 www.sensesakustik.com