



Technical Specifications

Composition

Frame 100% PET (60% Recycled Content)

Top Finish 100% PET (60% Recycled Content)

Applications Ceiling Mounted




Accessories Clutch Wire Systems

Dimensions

- **Dimension** Ø800 × 190 mm (H)



Product Drawings

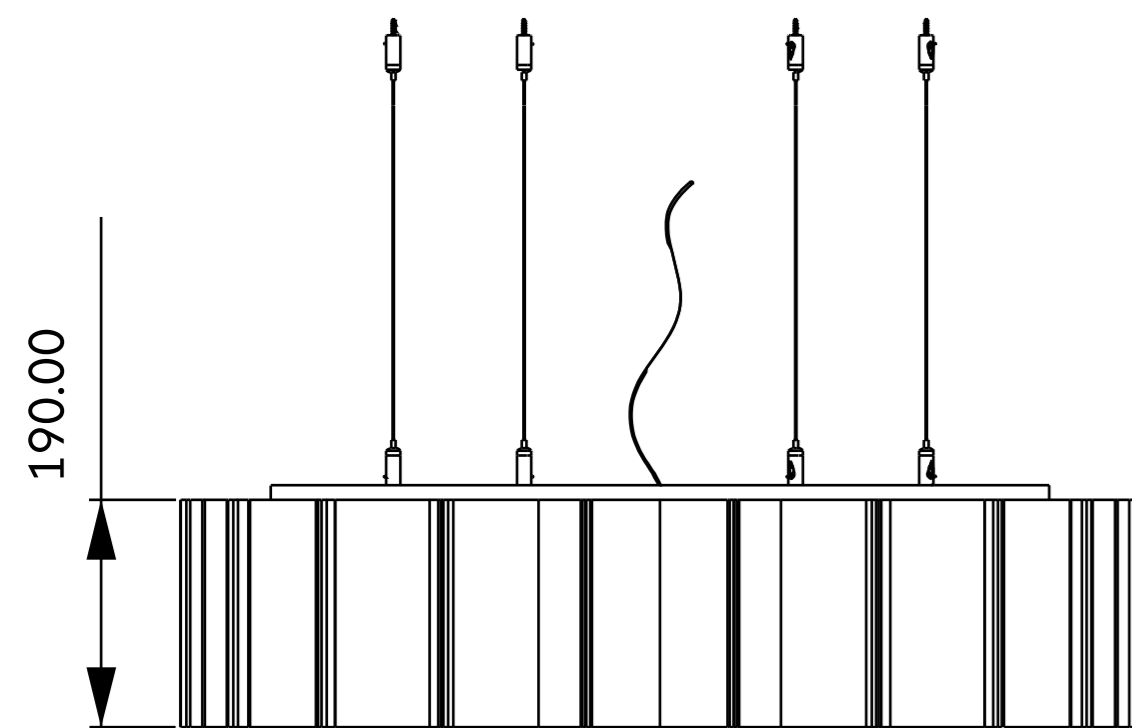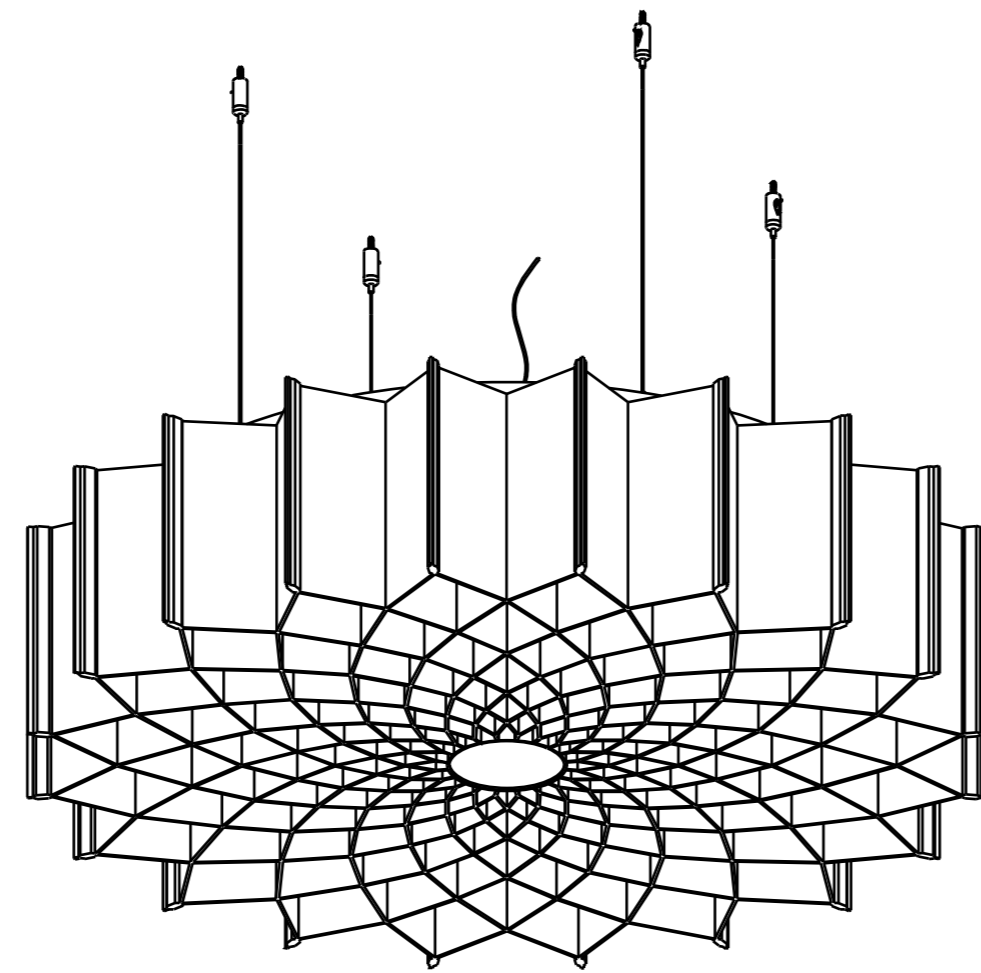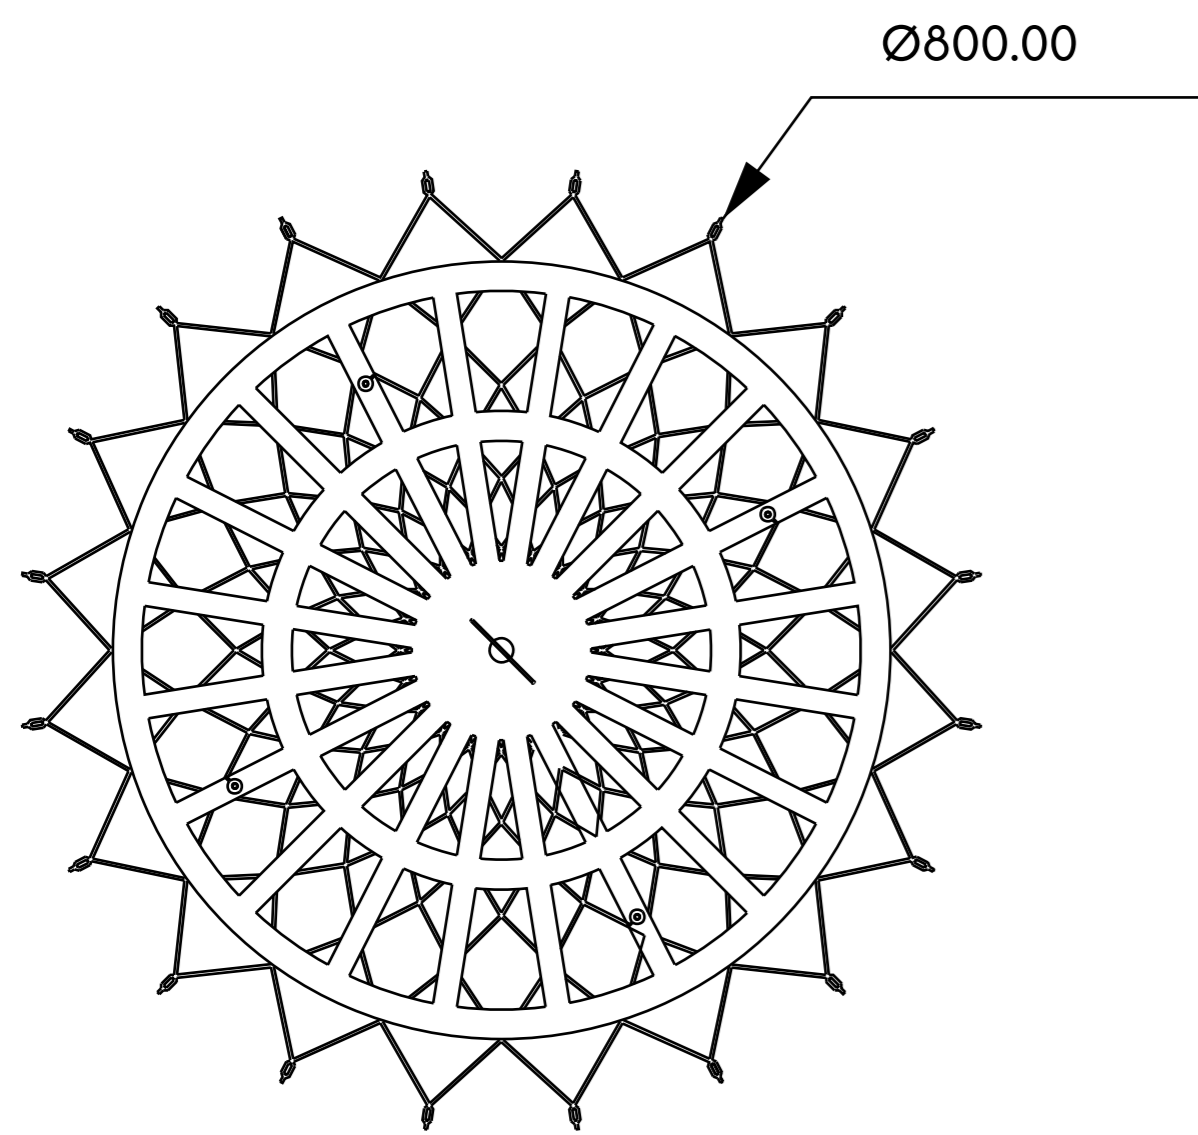


Light Technicals

Construction	:	Aluminum
Diffuser	:	High Transmission PC
UGR	:	<19
Life Span	:	50000 hours
Color Consistency	:	3 SDCM
Drivers	:	Constant current
Driver type	:	ON/OFF, Dimmable version available on request
Operating Voltage	:	220-240 V
CRI	:	80/90
CCT	:	3000K, 4000K, 6000K
Beam Angle	:	
Performance (LED)	:	Based on 4000K
	•	$\text{Ø}100 \times 190 \text{ mm (h)}$: 15W / 1800 lm

Performance

Acoustic Properties: **ASTM C423 | 0.58 Sabine m²** (Average value of sound absorption)

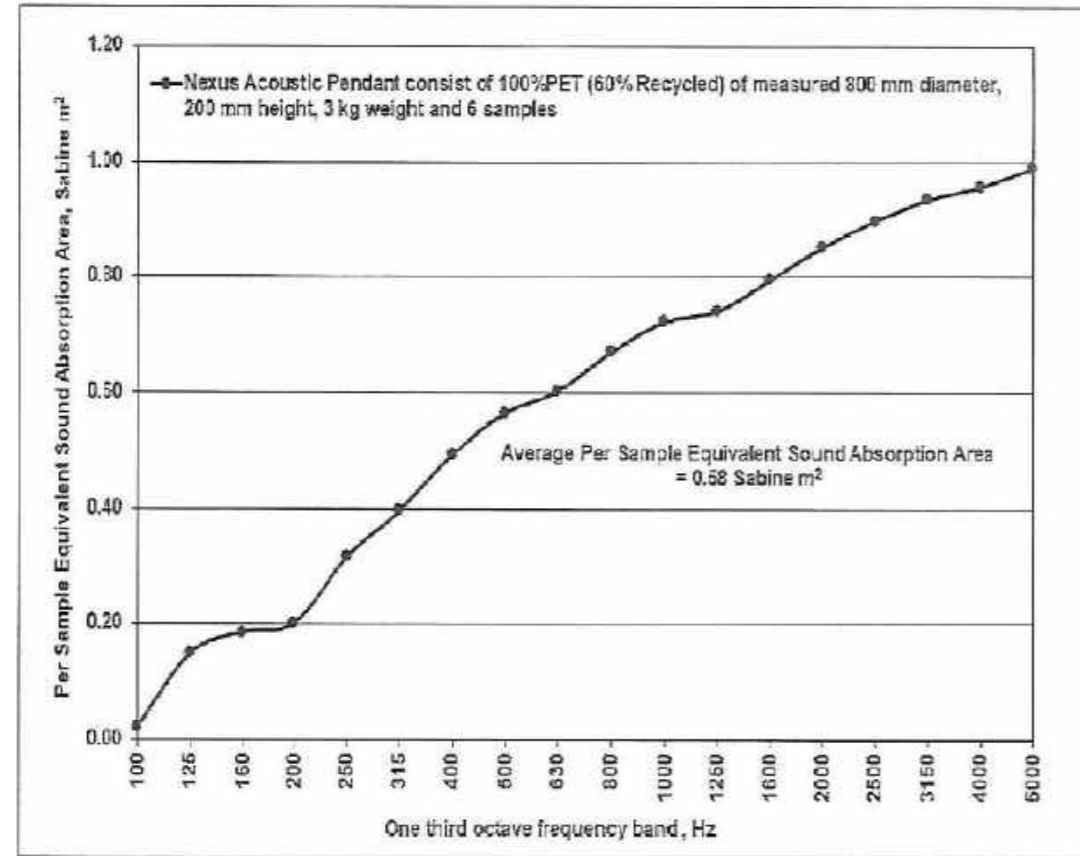

Fire Resistance: **ASTM E84- 2021 | Flame Spread Index: Class 1 or A |**
Smoke Developed Index: Class 1 or A
BS/EN 13501-1:2018 | Classification: B-s1, d0
BS/EN 13501-1:2018 | Classification: B-s1, d0

VOC Emissions **CDPH Standard Method v1.2 | Section 01350 – Low-emitting materials for schools and offices**

Sustainability **Certifications & Compliance :**

- LEED v4: Supports EQ Credit (Low-Emitting Materials)
- Certified Low VOC materials
- EPD & HPD certified
- Declare Label compliant
- USGBC LEED compliant



Declare.



Explore the upcoming colourways in the sections ahead. →

FELT 2.5

FELT 2.5



Composition	95% Polyester, 5% Rayon
Thickness	2.5 mm
Weight	500 gsm ($\pm 10\%$)
Flammability	Class 1 or A (ASTM E84)
Smoke Development Index	288 (ASTM E84)

 info@sensesakustik.com

 www.sensesakustik.com