



# Technical Specifications

## Composition





<b>Structure</b>	Metal
<b>Base</b>	100% PET (60% recycled content)
<b>Finishes</b>	Fabric
<b>Mobility</b>	Movable

- Accessories**
- Castors (Finish: Black)
  - Magnetic Writing Board (Standard)
  - Felt Manager (Finish available in F201 & F208)



# Patterns & Dimensions

## Variant 1: A 8015

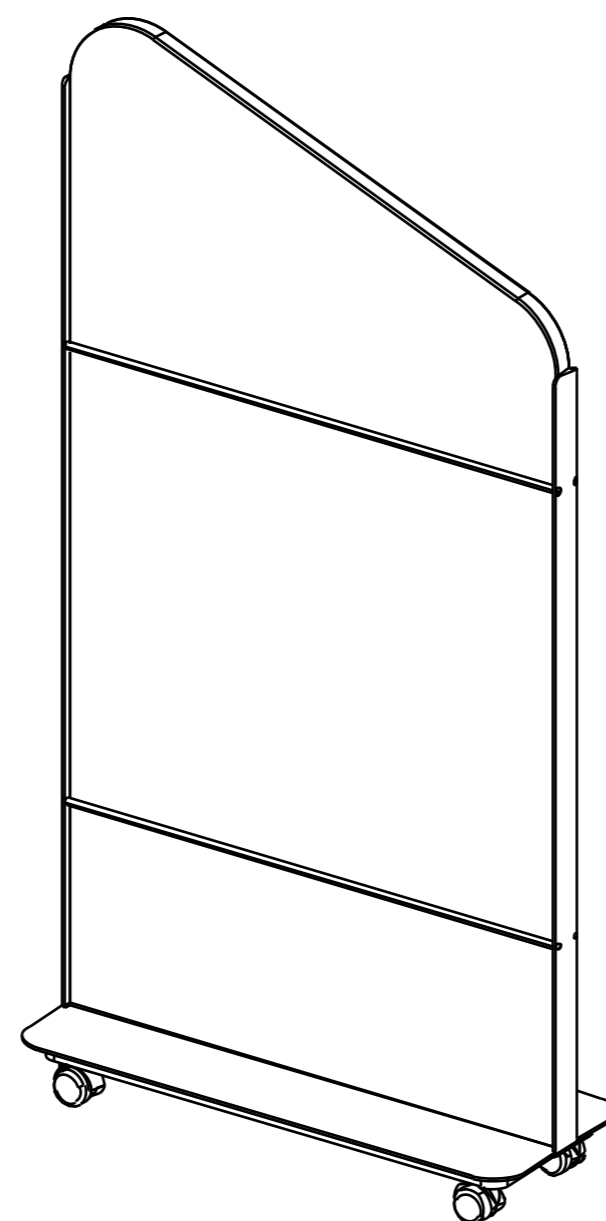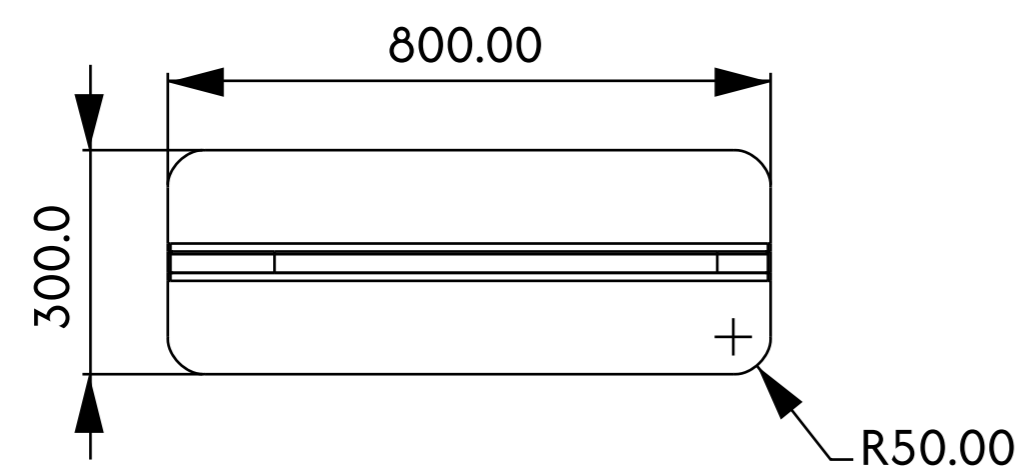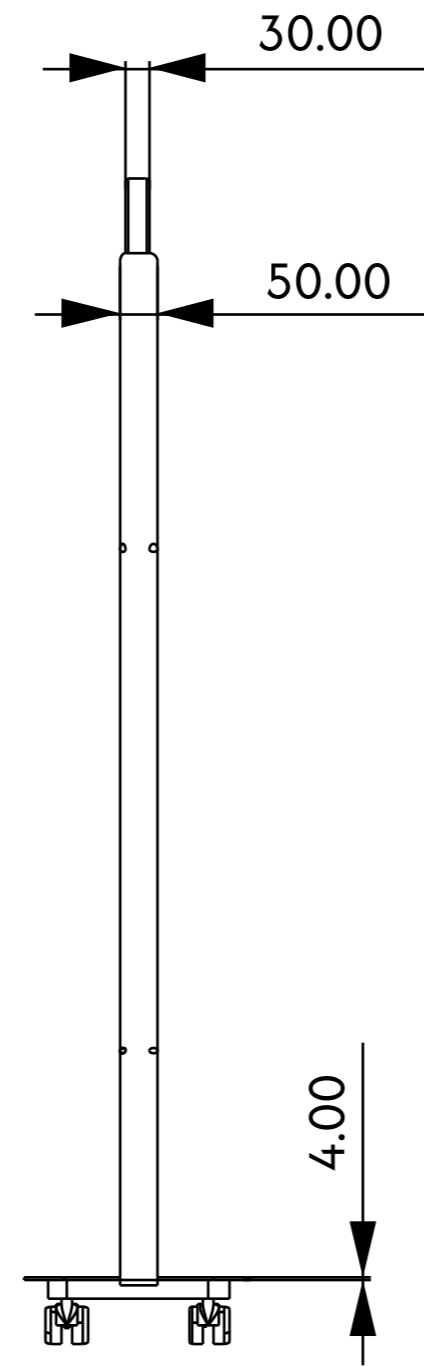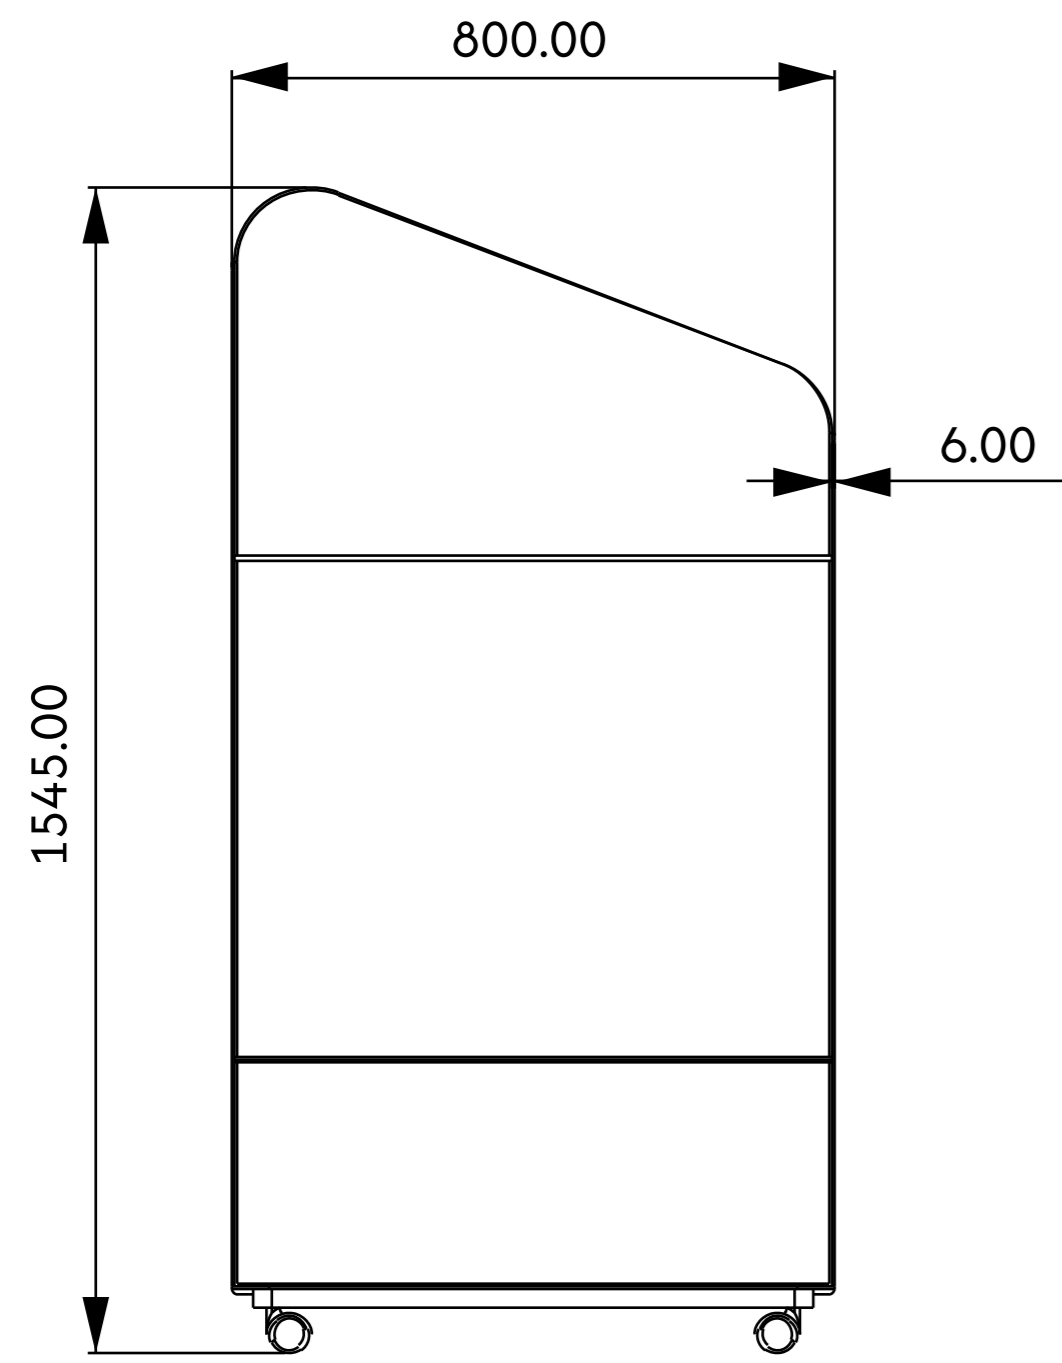

**Overall**

800 x 300 x 1545 mm (L x W x H)





**Base Structure**

800 x 300 x 29 mm (L x W x H)

**Castors**



Ø60 mm, Qty= 4nos in 1 module

Variant 2: A 1018

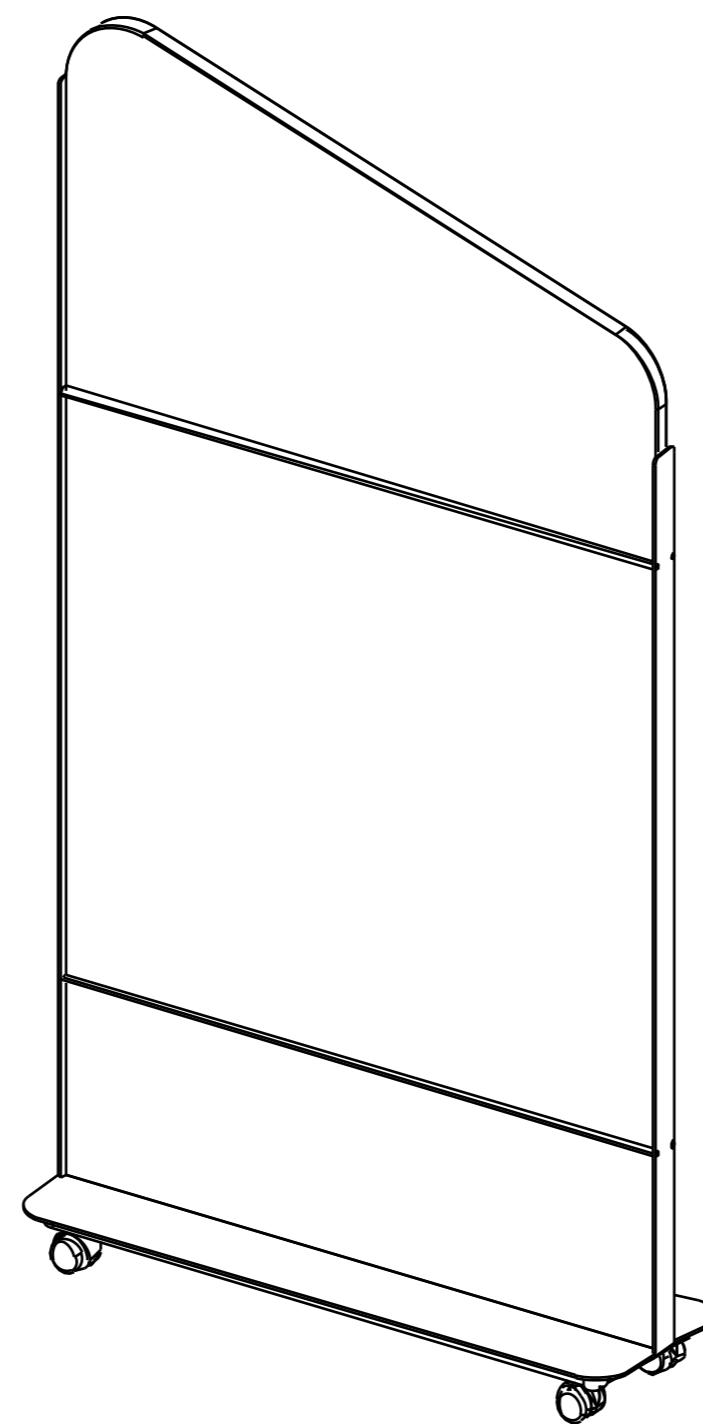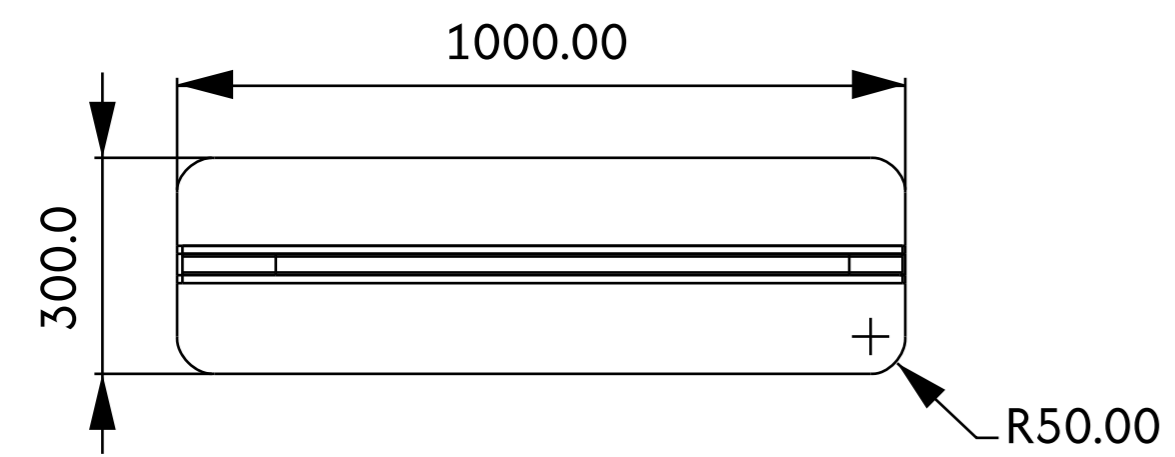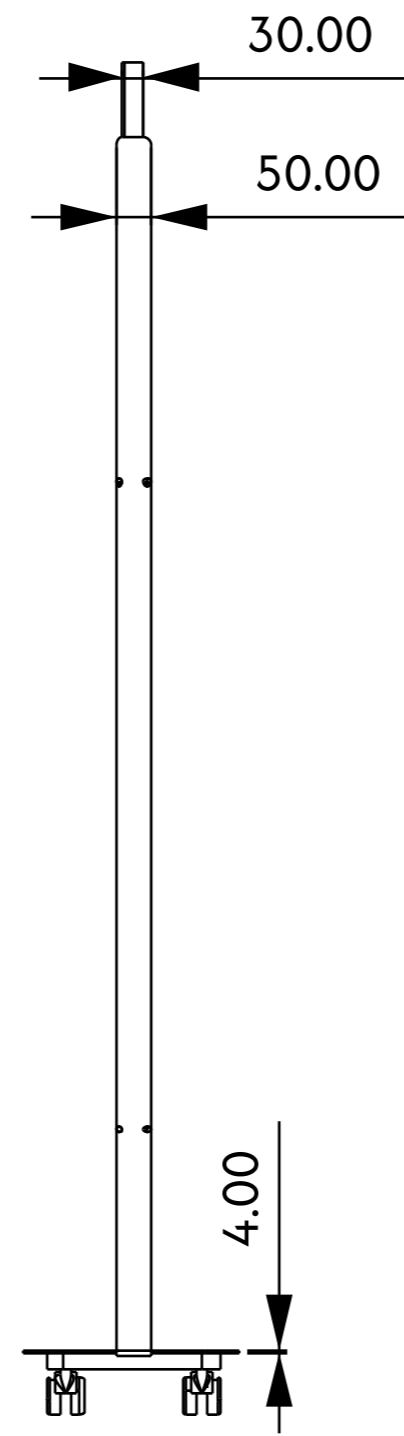
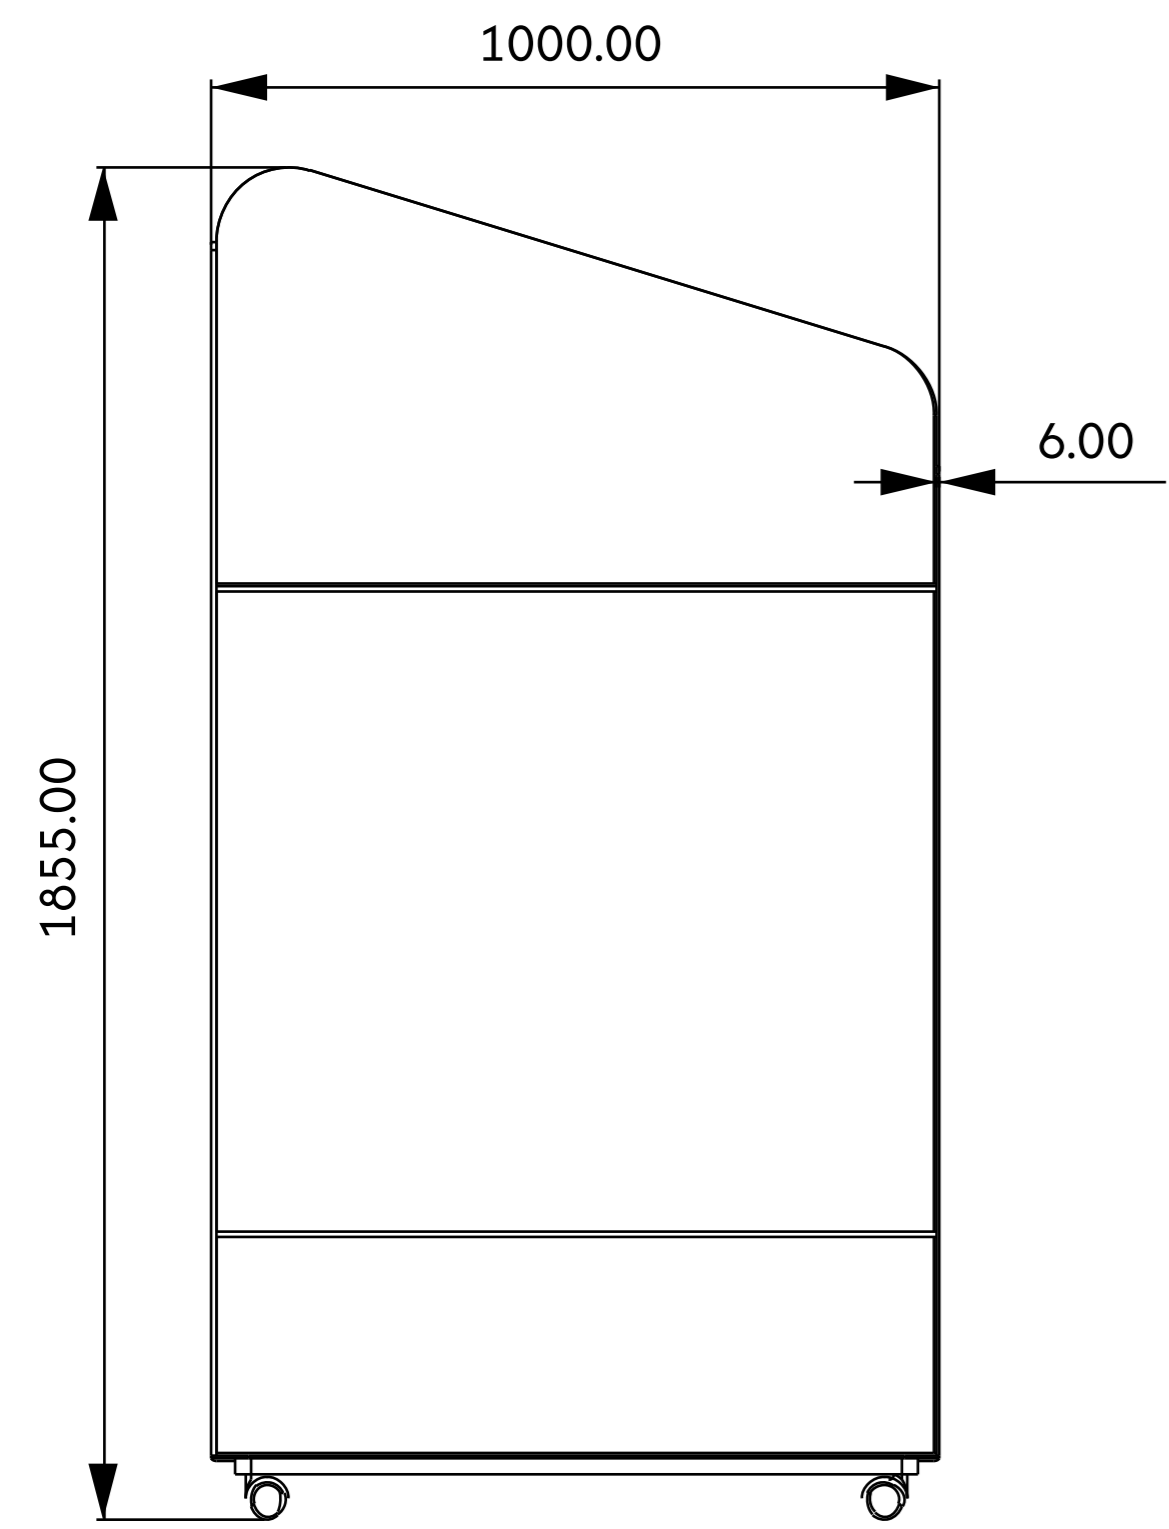


<b>Overall</b>	1000 x 300 x 1855 mm (L x W x H)
<b>Base Structure</b>	1000 x 300 x 29 mm (L x W x H)
<b>Castors</b>	Ø60 mm, Qty= 4nos in 1 module



**Variant 3: S 1218**

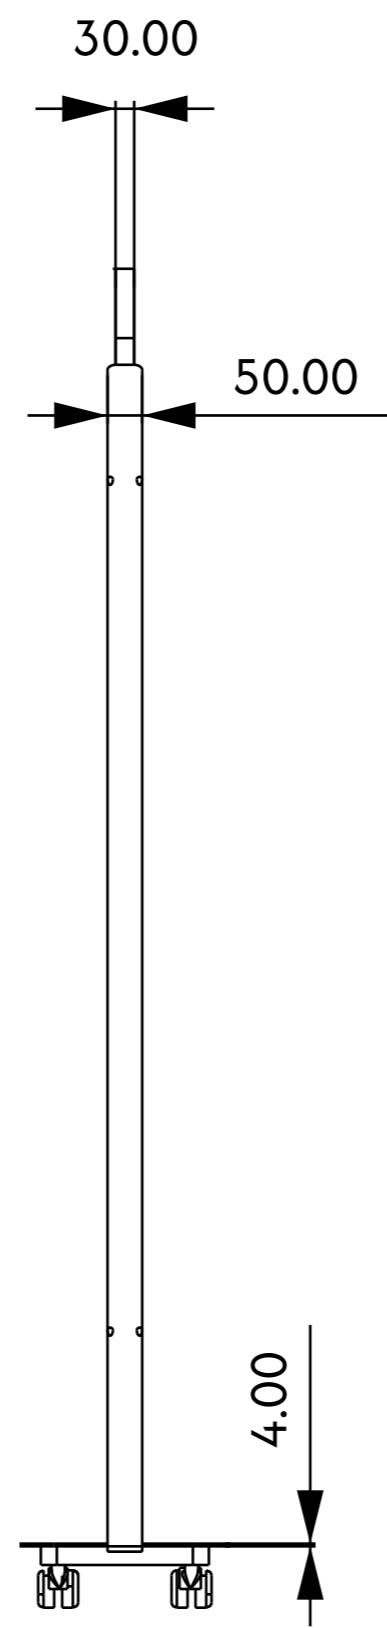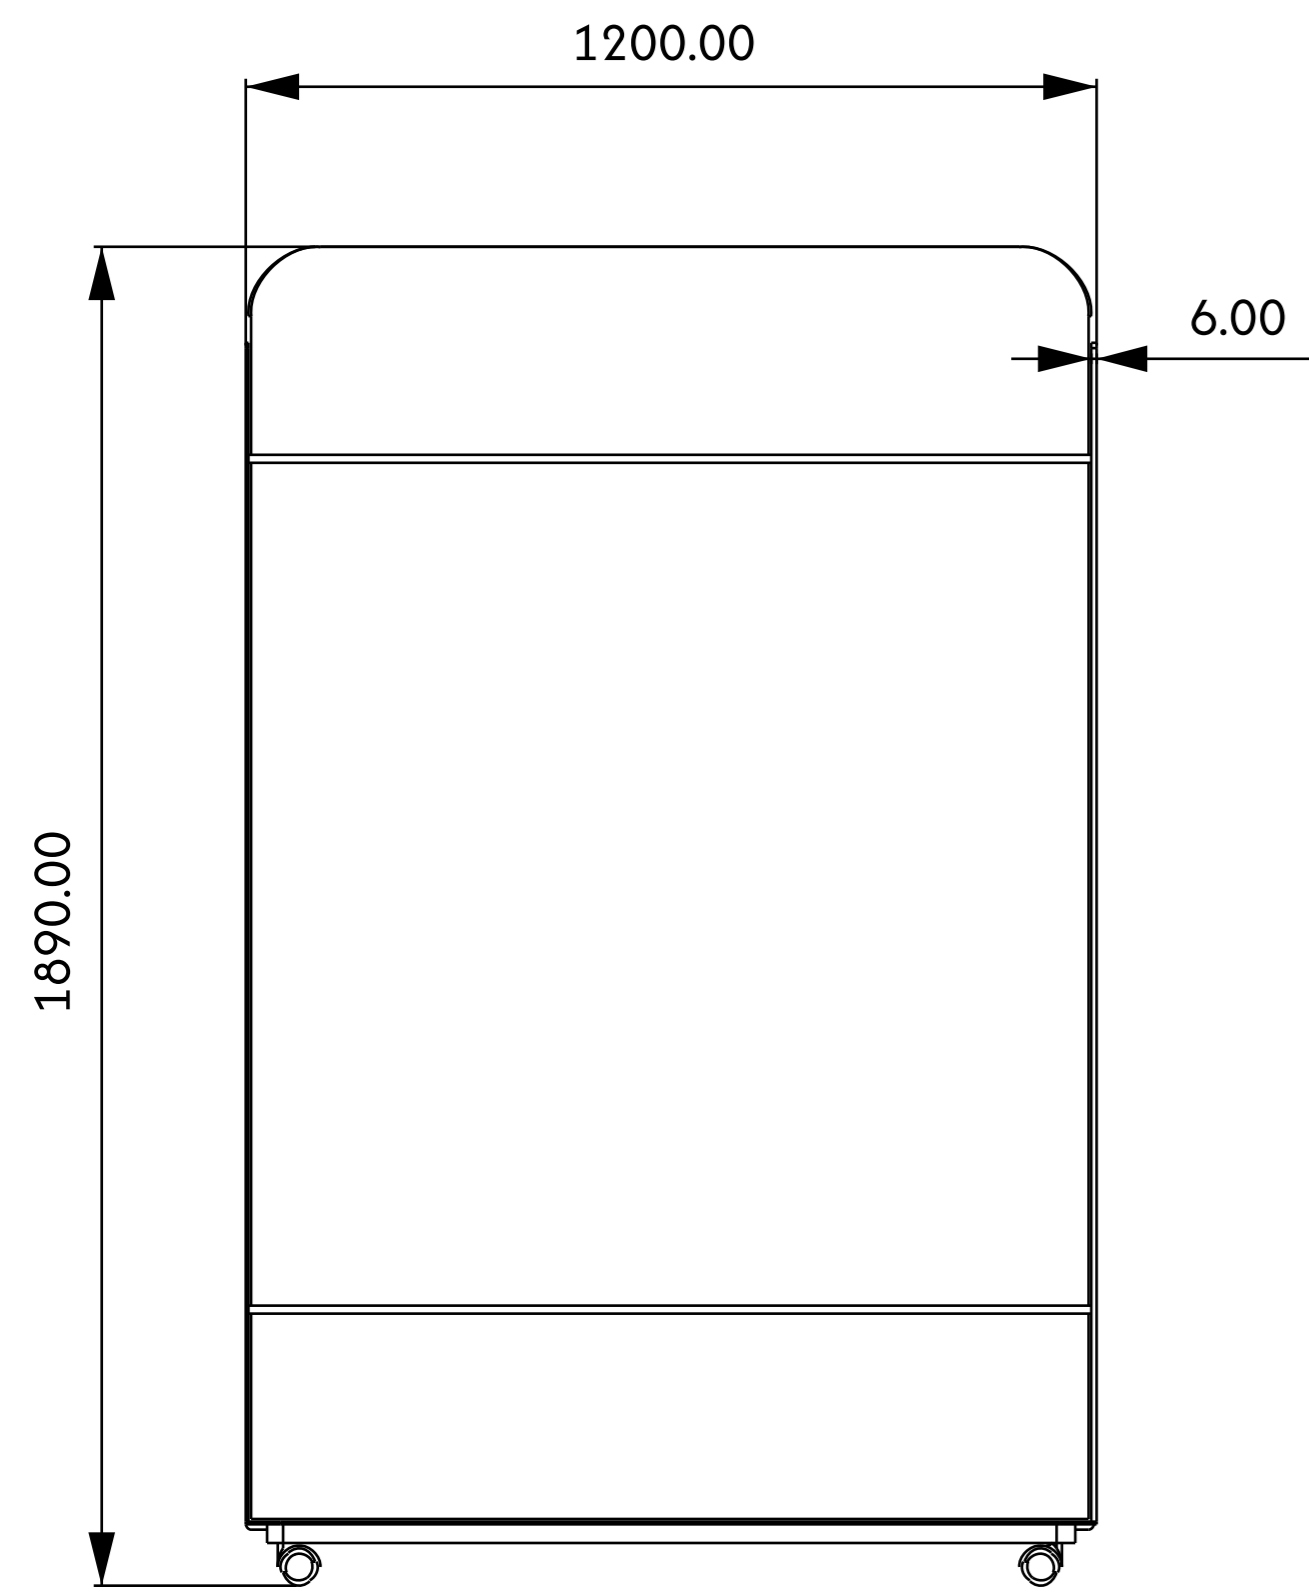



<b>Overall</b>	1200 x 300 x 1890 mm (L x W x H)
<b>Base Structure</b>	1200 x 300 x 29 mm (L x W x H)
<b>Castors</b>	Ø60 mm, Qty= 4nos in 1 module
<b>Writing Board</b>	1100 x 600 x 12 mm (L x W x T)

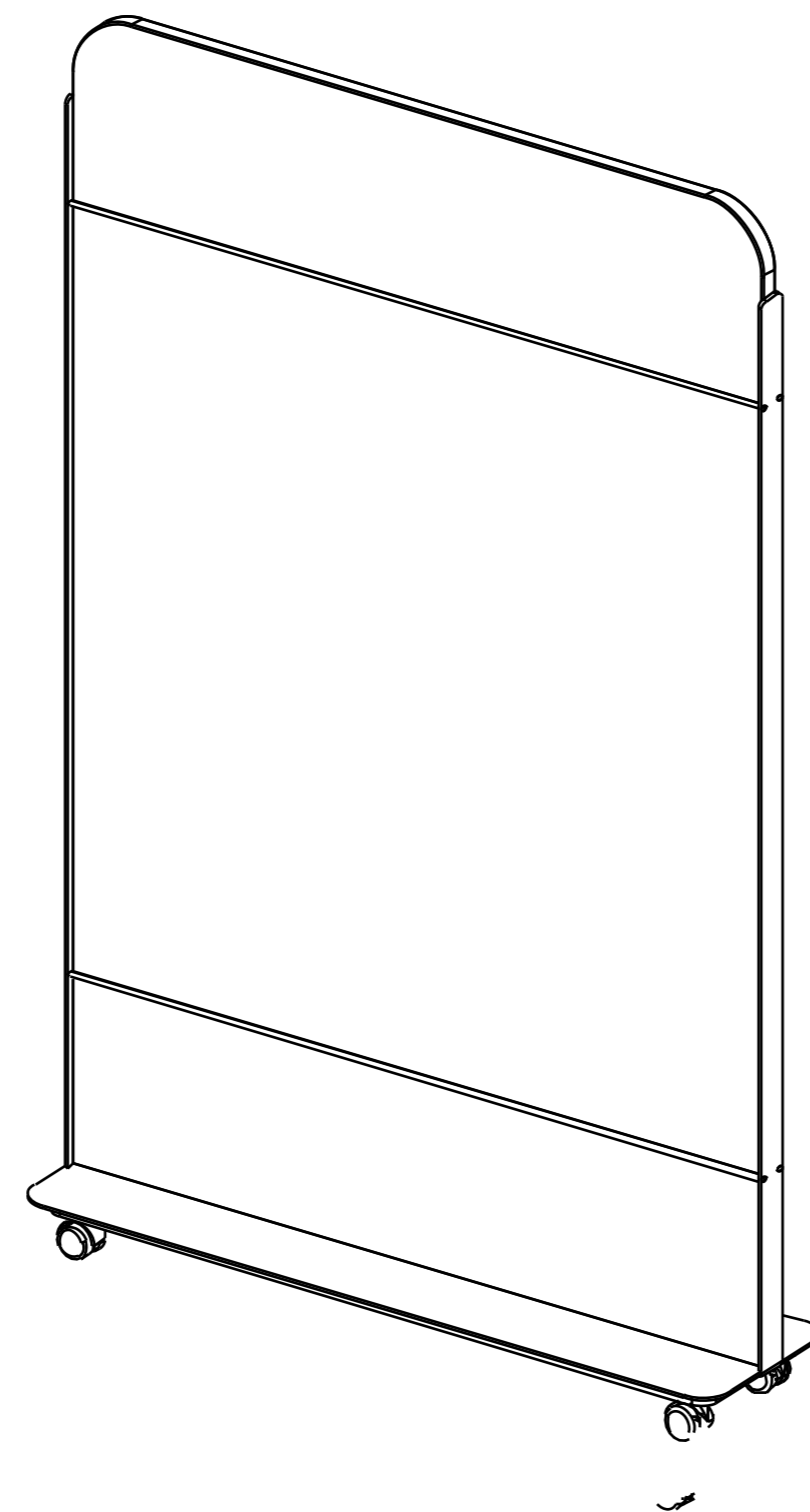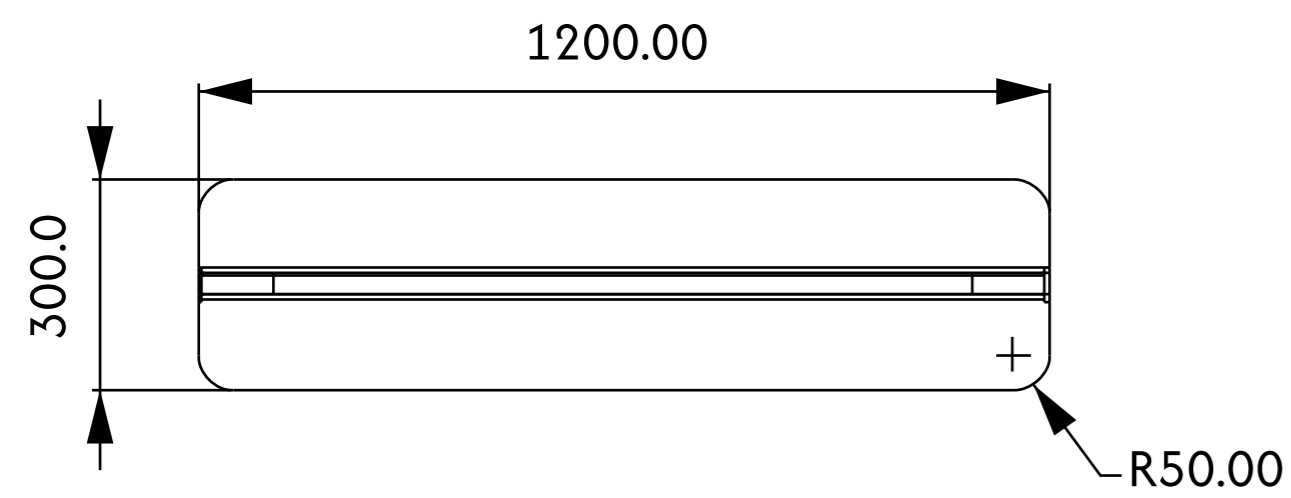



Variant 4: S 1016

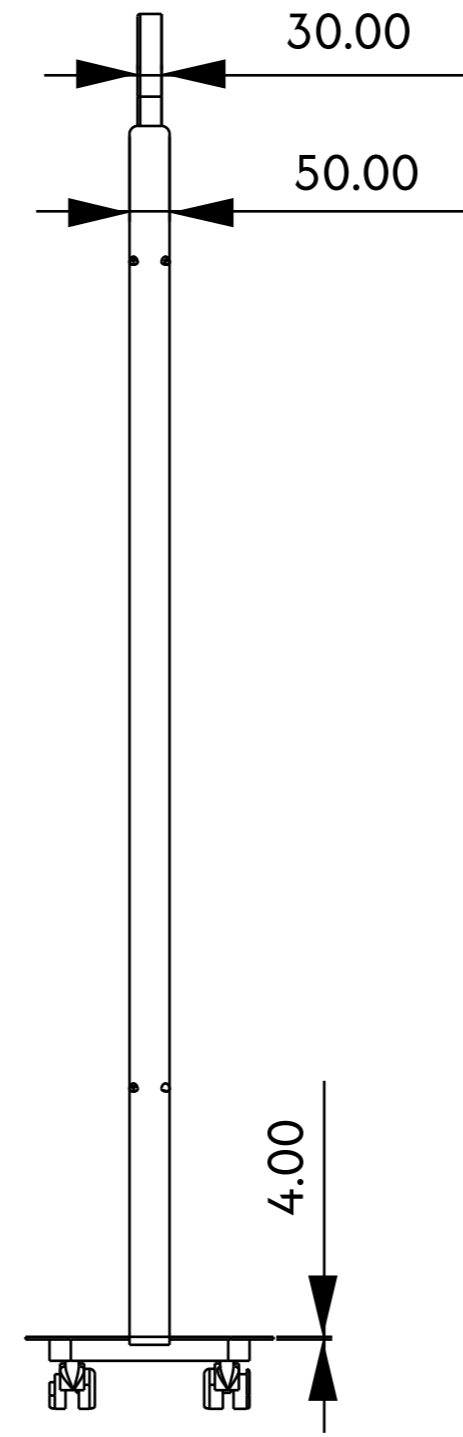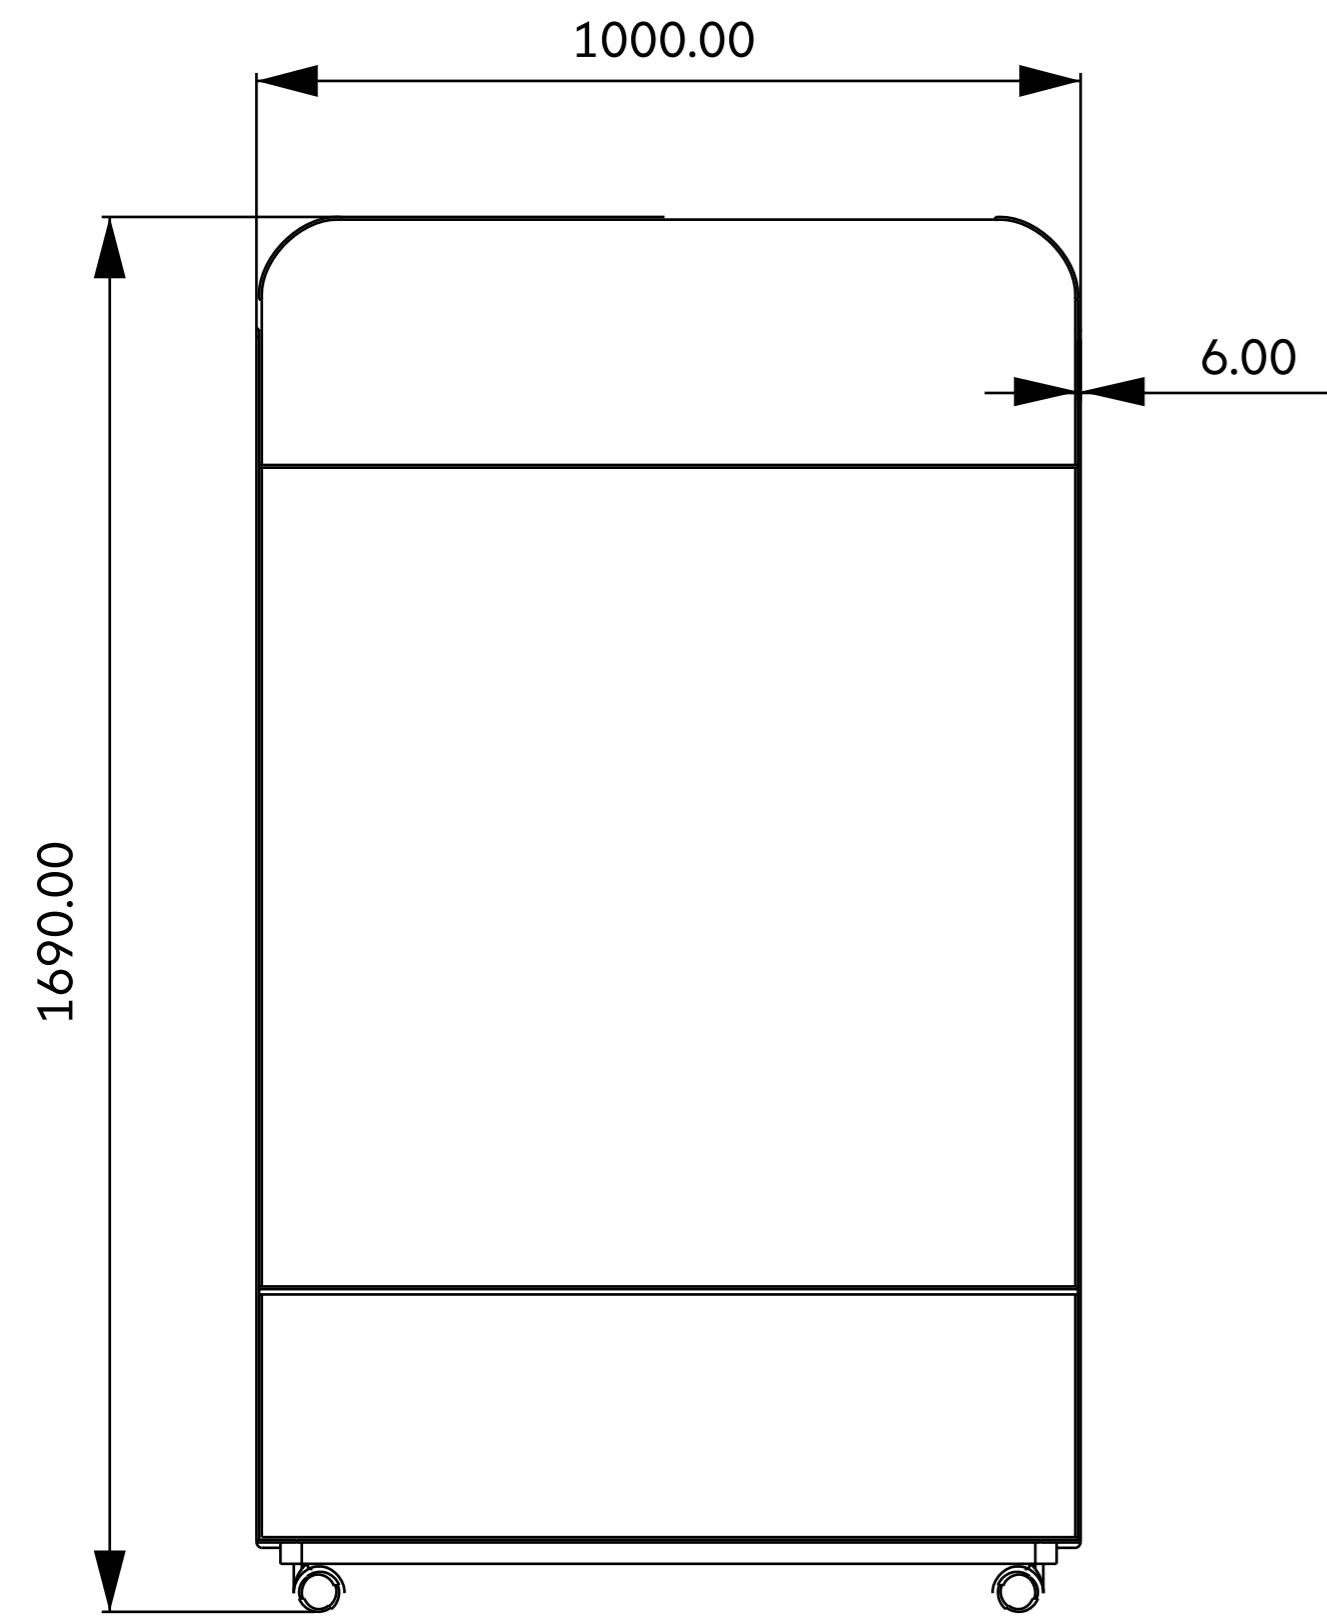

<b>Overall</b>	1000 x 300 x 1690 mm (L x W x H)
<b>Base Structure</b>	1200 x 300 x 29 mm (L x W x H)
<b>Castors</b>	Ø60 mm, Qty= 4nos in 1 module
<b>Felt Manager</b>	400 x 300 x 2.5 mm (L x W x T)
<b>Felt Color</b>	F201, F208 (Thickness: 2.5 mm)

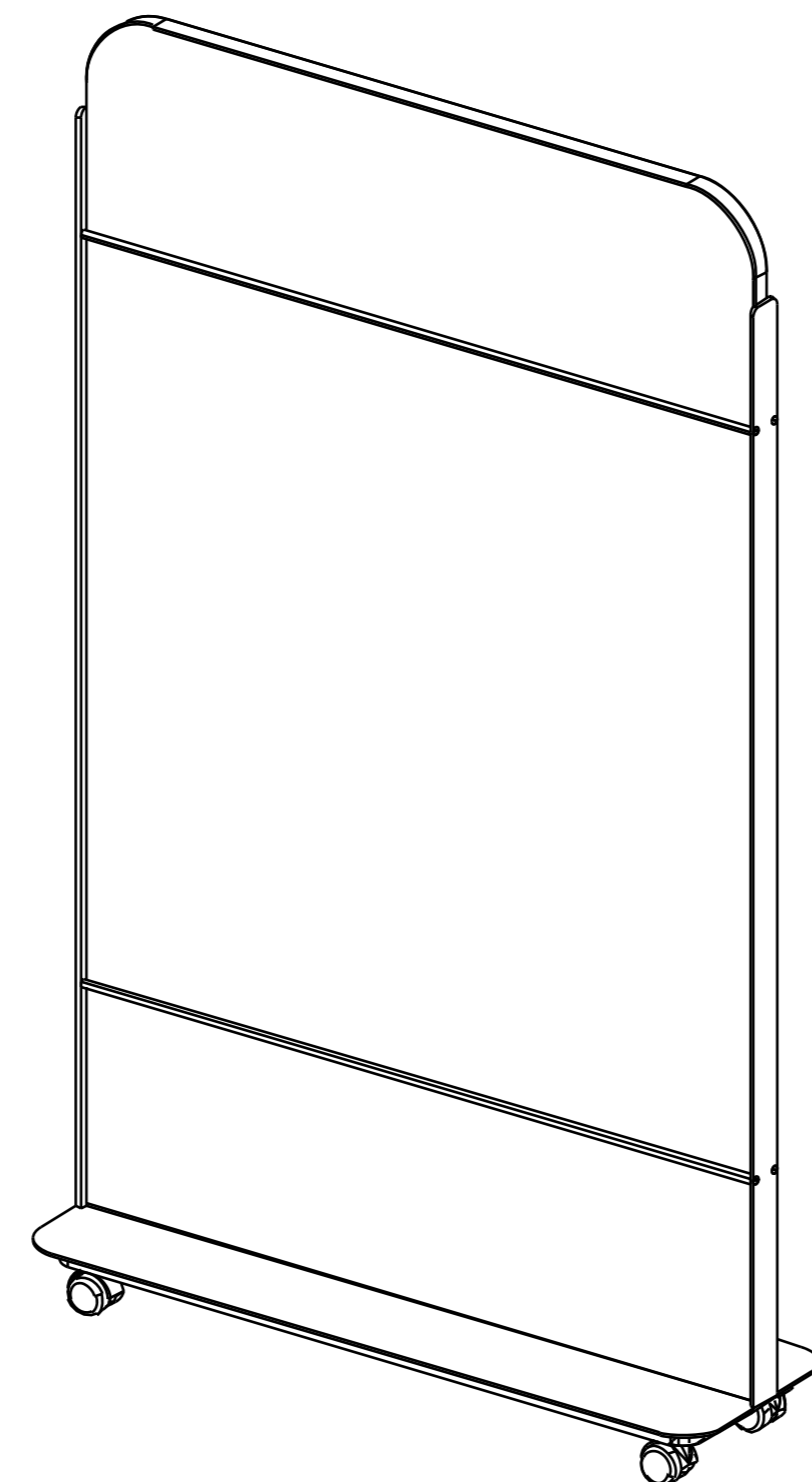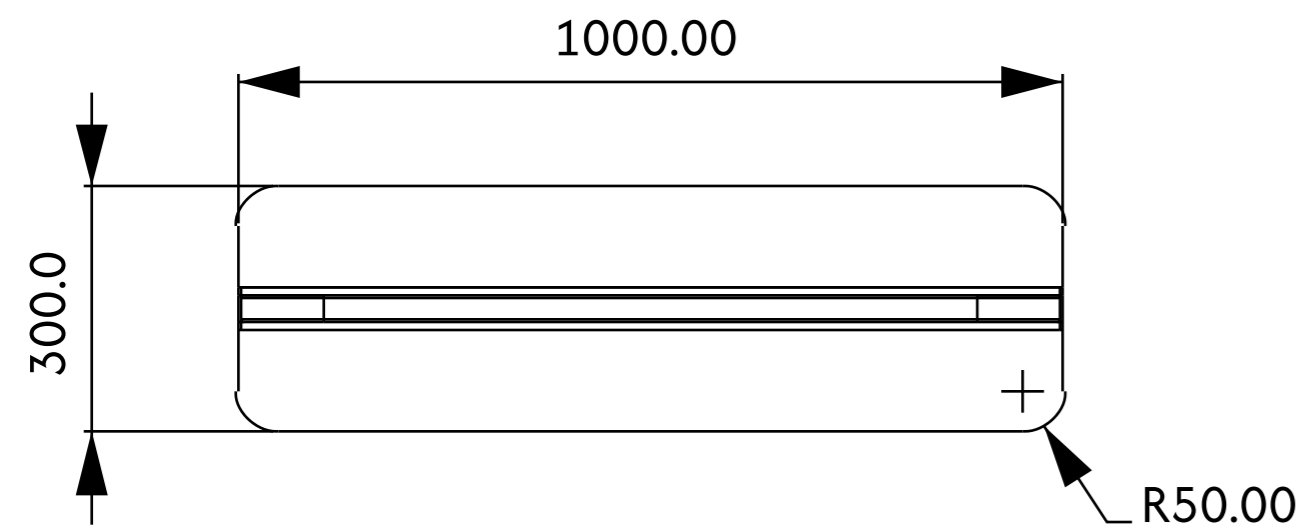

Variant 5: S 8014

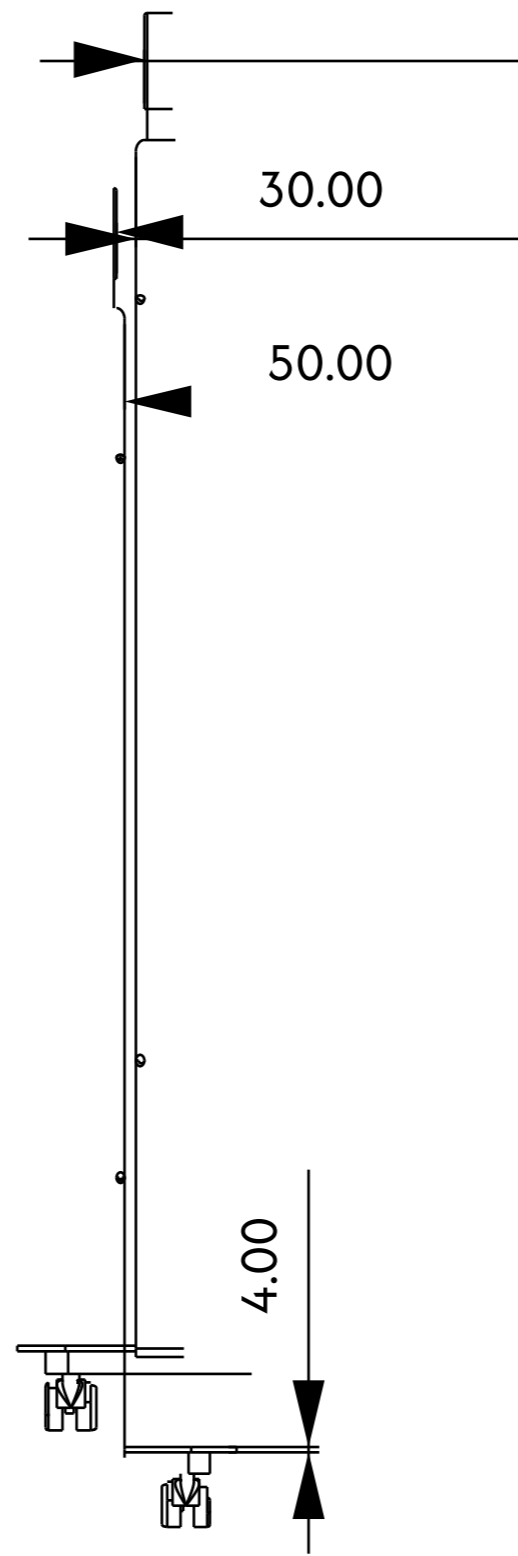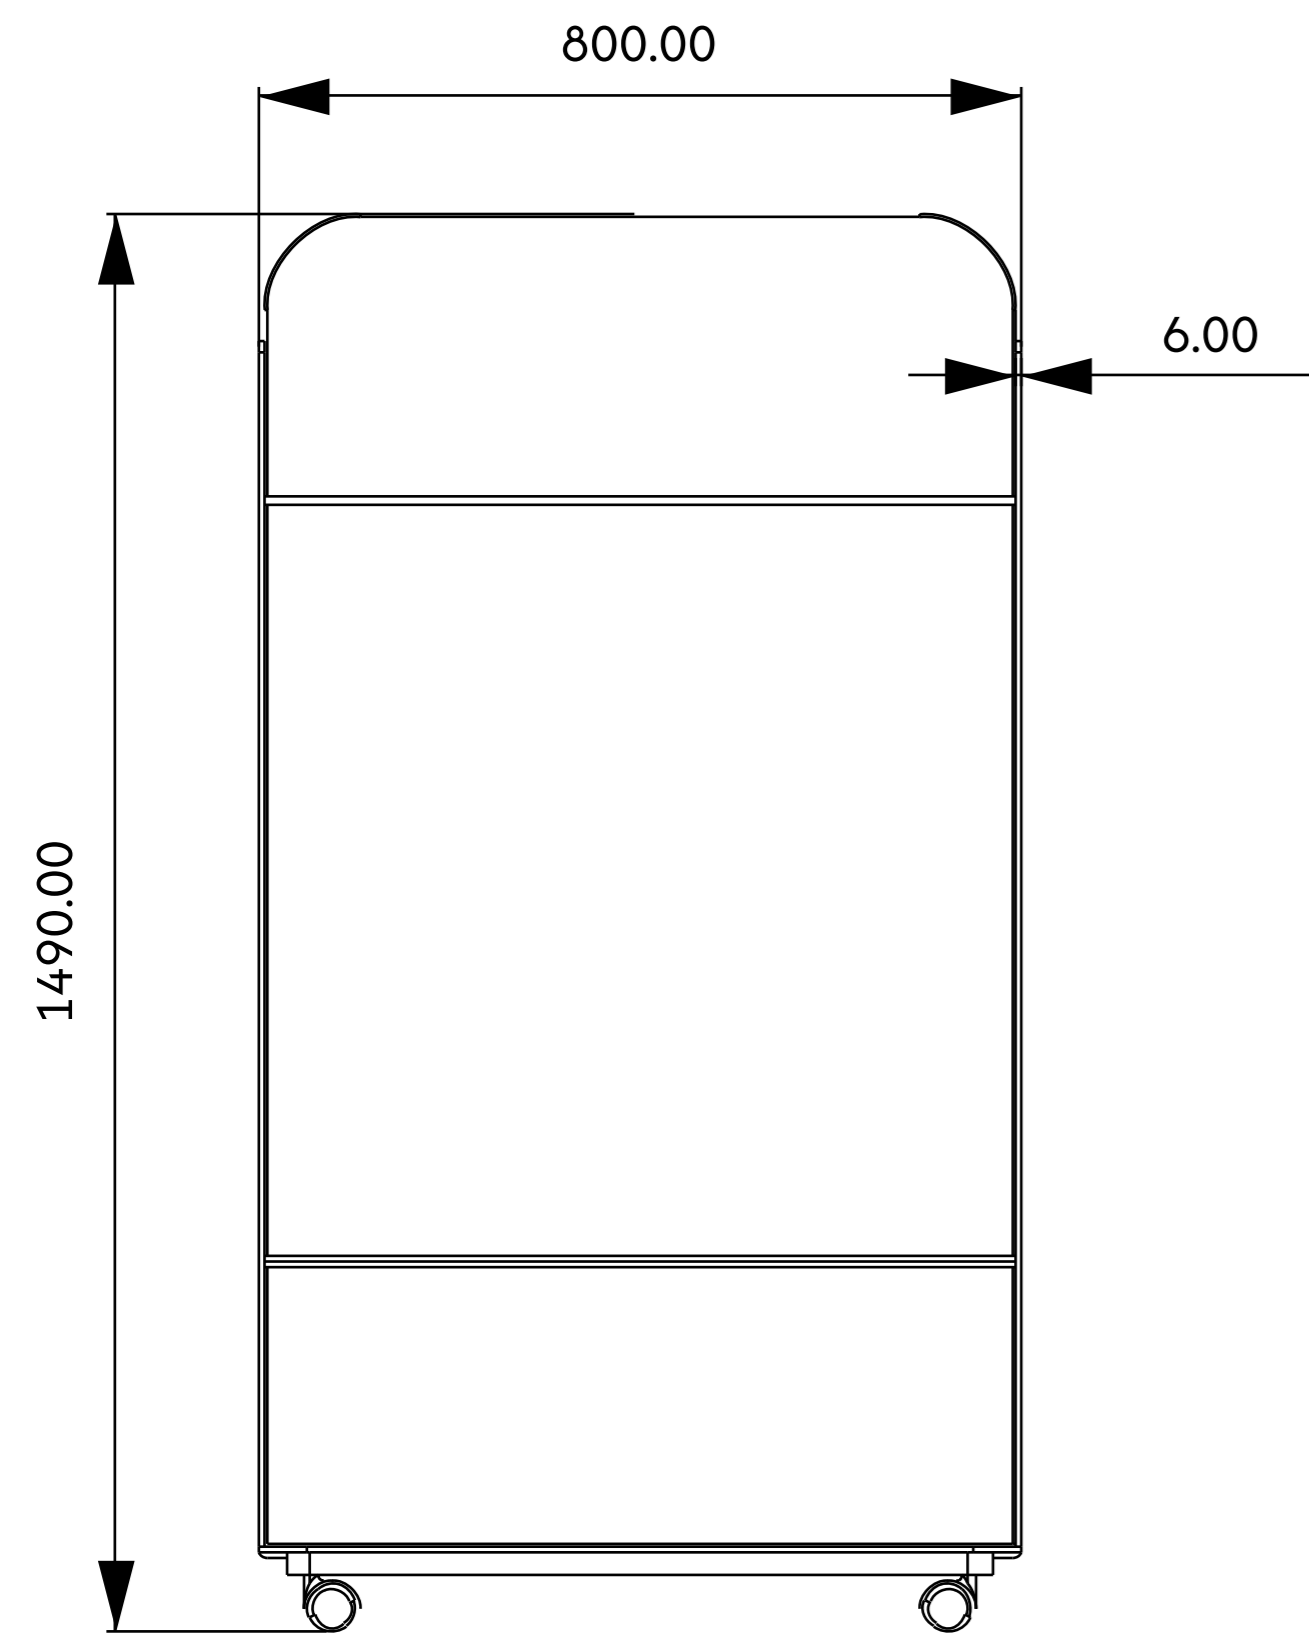

**Overall**



800 x 300 x 1490 mm (L x W x H)

**Base Structure**

800 x 300 x 29 mm (L x W x H)

**Castors**

Ø60 mm, Qty= 4nos in 1 module

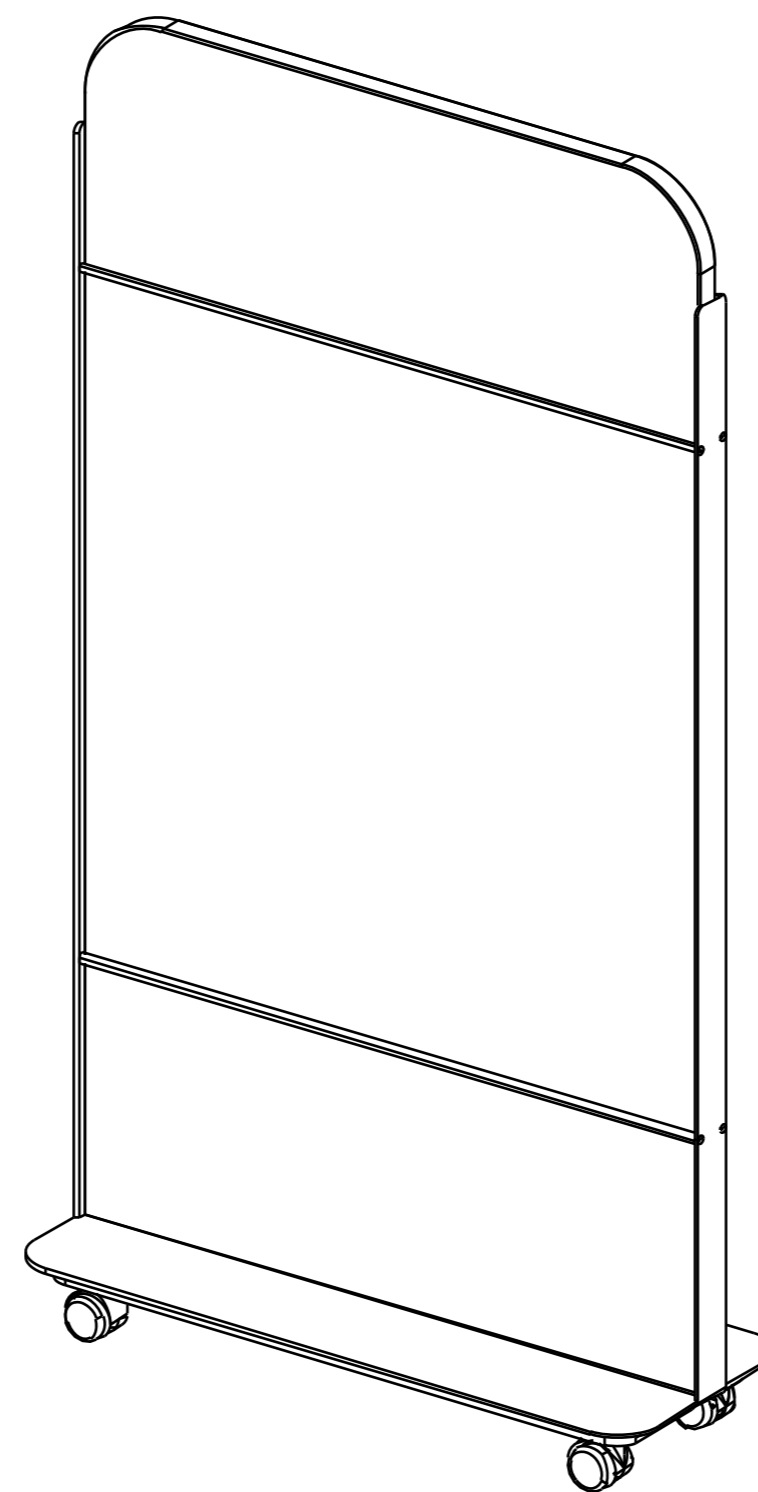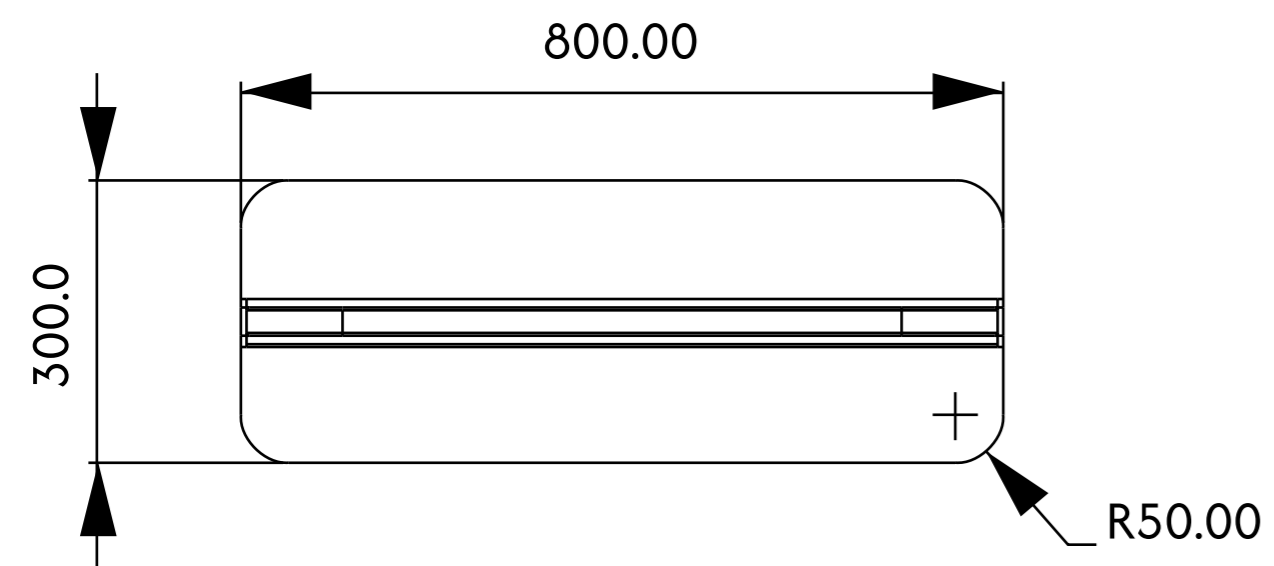

# Performance

## Fire Resistance:

### 1. Acoustic Panel (100 % PET (60% recycled content))

ASTM E84- 2021 | Flame Spread Index: Class 1 or A |  
Smoke Developed Index: Class 1 or A  
BS/EN 13501-1:2018 | Classification: B-s1, d0  
AS/NZS 1530.3:1999 | Flame Spread Index: 0 |  
Smoke Index: 2

### 2. Fabrics

- **Category A+**

BS 5852 Part 1: 1979 Ignition Source 0 & 1 |  
Details: Cigarette Test & Match Test | Result:  
PASS on both tests | Test Number: 423681

- **Category A**

BS 5852 Part 1: 1979 Ignition Source 0 & 1 |  
Details: Cigarette Test & Match Test | Result:  
PASS on both tests | Test Number: 187662

- **Category B**

AS/NZS 1530.3:1999 | Details: Simultaneous test for  
Ignitability, Flame Propagation, Heat Release & Smoke  
Release | Result: Passed | Test Number: 19-001329

## VOC Emissions

CDPH Standard Method v1.2 | Section 01350 –  
Low-emitting materials for schools and offices

## Sustainability

## Certifications & Compliance:

- LEED v4: Supports EQ Credit (Low-Emitting Materials)
- Certified Low VOC materials
- EPD & HPD certified
- Declare Label compliant
- USGBC LEED compliant



# Variants



A-8015



A-1018



S-1218



S-1016




S-8014

## Fabrics

### CAT A+ : COLORWAYS


#### SOHO

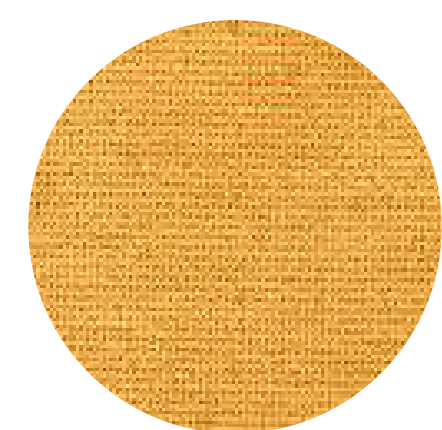

<b>Composition</b>	100% Polyester
<b>Weight (per surface)</b>	420 gsm
<b>Width</b>	145 cm (min. usable 138 cm)
<b>Abrasion resistance</b>	100,000+ Wyzenbeek   90,000 Martindale
<b>Flammability</b>	CA TB 117 - 2013   BS 5852: Part 1(1979)
<b>Fastness to light</b>	5
<b>Fastness to rubbing</b>	Wet - 4   Dry - 4/5
<b>Pilling</b>	Piling on Martindale - 3/4   Brush pilling - 5
<b>Seam Slippage</b>	Warp - 2.5 mm   Weft - 3 mm


### CAT A : COLORWAYS

#### GLASGOW

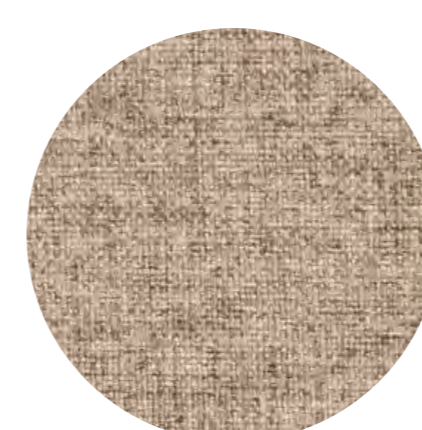


<b>Composition</b>	100% Polyester
<b>Weight (per surface)</b>	265 gsm
<b>Width</b>	145 cm (min. usable 138 cm)
<b>Abrasion resistance</b>	84,000 Wyzenbeek   >100,000 Martindale
<b>Flammability</b>	CA TB 117 - 2013 BS 5852 Source 0,1 (cigarette & match) EN 1021 Part1,2 (cigarette & match)
<b>Fastness to light</b>	5
<b>Fastness to rubbing</b>	Wet - 3/4   Dry - 4
<b>Pilling</b>	3/4
<b>Seam Slippage</b>	Warp - 4 mm   Weft - 4 mm

#### QUARTZ

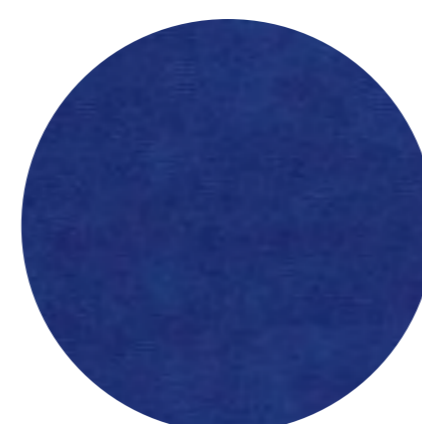

<b>Composition</b>	100% Polyester
<b>Weight (per surface)</b>	360 gsm
<b>Width</b>	142 cm (min. usable 138 cm)
<b>Abrasion resistance</b>	100,000 Wyzenbeek   90,000 Martindale
<b>Flammability</b>	CA TB 117 - 2013
<b>Fastness to light</b>	4/5
<b>Fastness to rubbing</b>	Wet - 4   Dry - 4/5
<b>Pilling</b>	Martindale Pilling - 5   Brush Pilling - 5
<b>Seam Slippage</b>	Warp - 3 mm   Weft - 3 mm

## SHETLAND

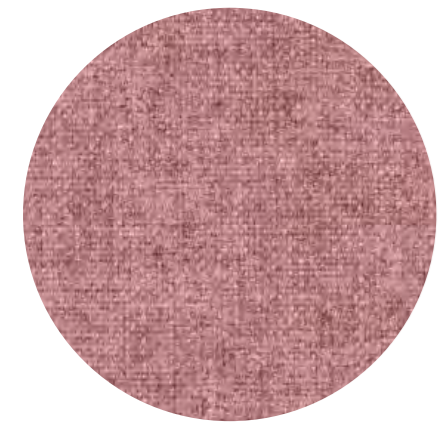

<b>Composition</b>	100% Polyester
<b>Weight (per surface)</b>	280 gsm
<b>Width</b>	145 cm (min. usable 138 cm)
<b>Abrasion resistance</b>	>100,000 Wyzenbeek   45,000 Martindale
<b>Flammability</b>	BS 5852: Part 1 (1979)   CA TB 117 - 2013
<b>Fastness to light</b>	5
<b>Fastness to rubbing</b>	Wet - 4   Dry - 4/5
<b>Pilling</b>	Martindale Pilling - 4   Brush Pilling - 5
<b>Seam Slippage</b>	Warp - 1.67 mm   Weft - 2 mm


## TWEED



<b>Composition</b>	100% Polyester
<b>Weight (per surface)</b>	240 gsm
<b>Width</b>	142 cm (min. usable 138 cm)
<b>Abrasion resistance</b>	54,000 Wyzenbeek   100,000 Martindale
<b>Flammability</b>	CA TB 117 - 2013 BS 5852 Source 0,1 (cigarette & match) EN 1021 Part1,2 (cigarette & match)
<b>Fastness to light</b>	5
<b>Fastness to rubbing</b>	Wet - 4   Dry - 4/5
<b>Pilling</b>	3/4
<b>Seam Slippage</b>	Warp - 2 mm   Weft - 2 mm

## CAT B : COLORWAYS

## ELTON

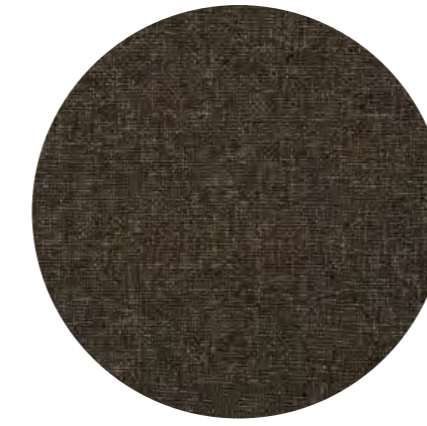


<b>Composition</b>	100% Polyester
<b>Weight (per surface)</b>	275 gsm
<b>Width</b>	140 cm
<b>Abrasion resistance</b>	70,000 Wyzenbeek
<b>Flammability</b>	AS/NZS 1530.3 - 1999
<b>Fastness to light</b>	5
<b>Fastness to rubbing</b>	Wet - 4/5   Dry - 4/5
<b>Pilling</b>	5
<b>Seam Slippage</b>	Warp - 3.3 mm   Weft - 3 mm
<b>Attributes</b>	Halo Easy Care, Oekotex Standard 100

## FELIX



<b>Composition</b>	100% Polyester
<b>Weight (per surface)</b>	380 gsm
<b>Width</b>	142 cm
<b>Abrasion resistance</b>	100,000 Wyzenbeek
<b>Flammability</b>	AS/NZS 1530.3 - 1999
<b>Fastness to light</b>	6
<b>Fastness to rubbing</b>	Wet - 5   Dry - 5
<b>Pilling</b>	5
<b>Seam Slippage</b>	Warp - 2 mm   Weft - 1.5 mm
<b>Attributes</b>	Halo Easy Care, Oekotex Standard 100

METAL POWDER COATING

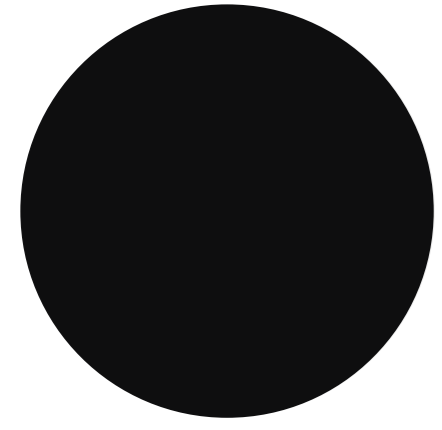

RAL 9005 - Jet Black

